TOP VIEW (PCB side) 4:1

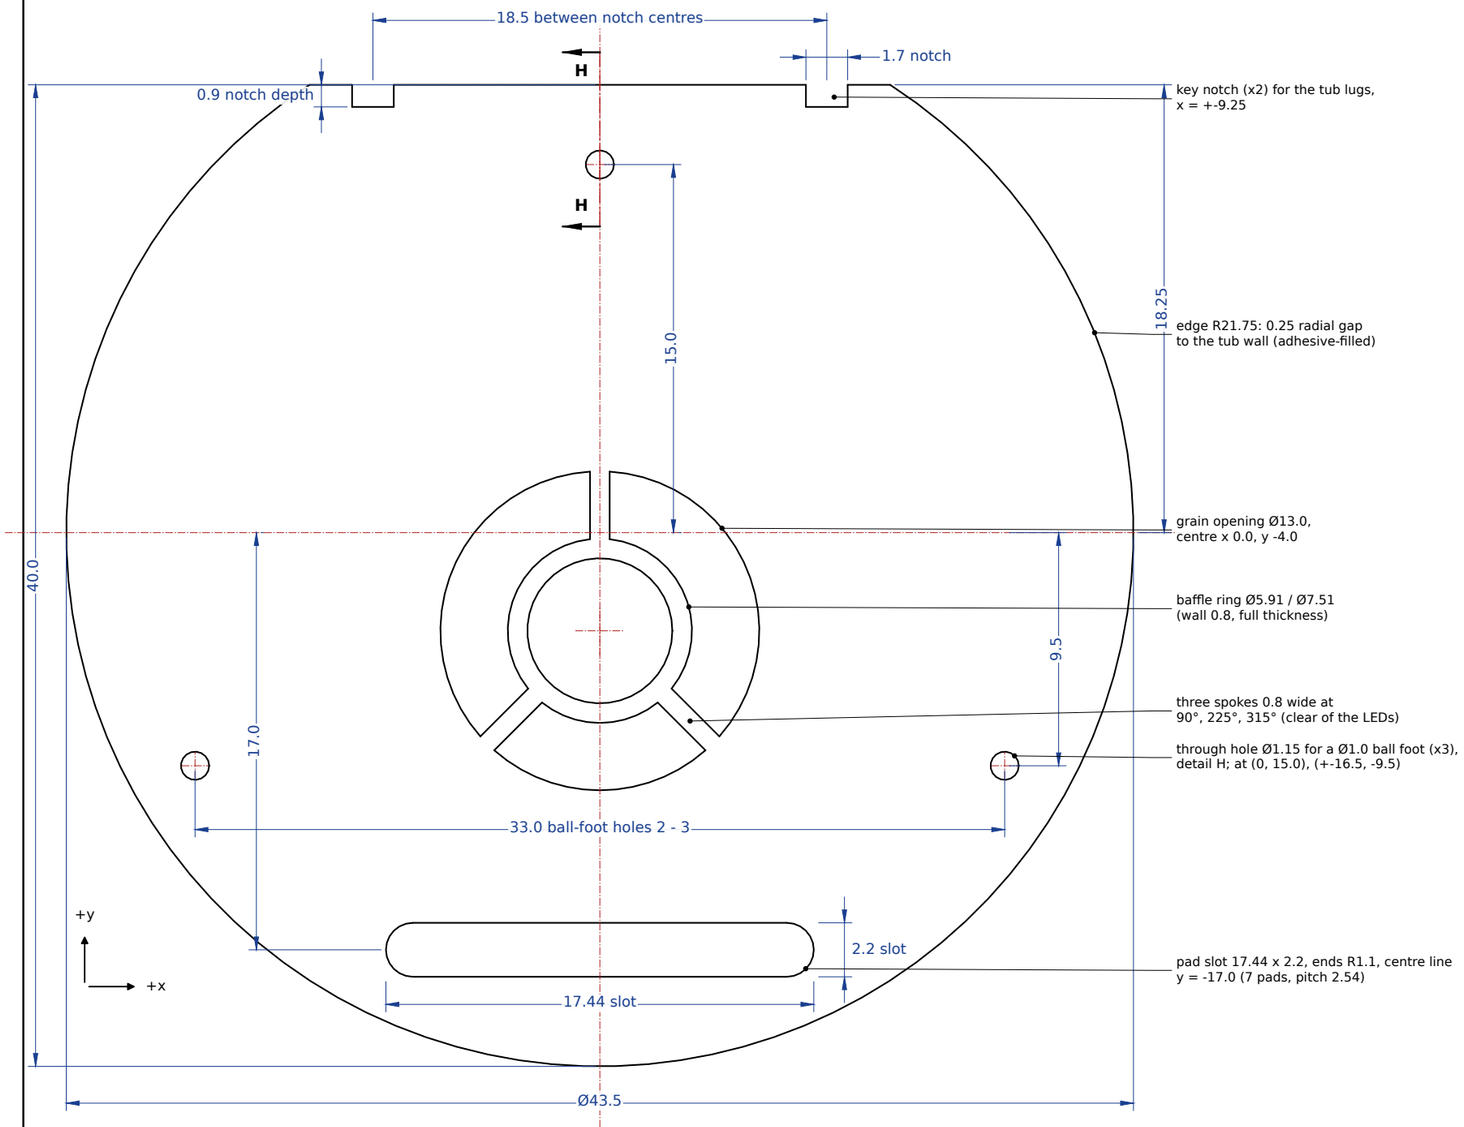

DETAIL H - ball foot 1 as assembled (x = 0) 20:1

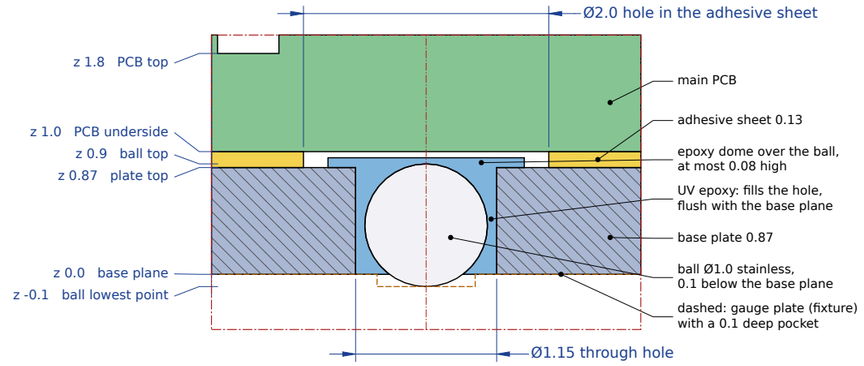

Feature	Qty	Size	Position (x, y)
Outline	1	R21.75, flat y 18.25	centre (0, 0)
Grain opening	1	Ø13.0 through	(0.0, -4.0)
Baffle ring	1	Ø5.91 / Ø7.51	concentric with the opening
Spokes	3	0.8 wide	90°, 225°, 315° from +x
Pad slot	1	17.44 x 2.2	centre (0, -17.0)
Ball-foot holes	3	Ø1.15 through	(0, 15.0), (+-16.5, -9.5)
Key notches	2	1.7 x 0.9	(+-9.25, front edge)
Thickness	-	0.87	z 0 to 0.87

NOTES

1. Rev C: plate 0.87 mm; with the 0.13 mm adhesive sheet the PCB underside is at z = 1.0.
2. Ball feet: the print cannot hold a 0.1 mm protrusion. Place the plate on a gauge plate (three 0.1 deep pockets, or a 0.1 shim with clearance holes), drop the balls in, pot them with UV epoxy from this side, cure, then apply the adhesive sheet (README assembly step 2).
3. The top face is the bonding face for the adhesive sheet and the seal land (r 21.35 to 21.75, bead 0.33 mm): keep flat, no vapor-smoothing sink marks.
4. One slot for the seven pads (webs between Ø2.2 holes would be 0.34 mm).
5. No wall below 0.8 mm (check 5). The plate will not print flat: it is laminated to the PCB.

Generated from the CAD model by cad/drawings.py - dimensions are nominal model values, computed, not typed. Frame: origin at puck centre on the base plane, +x right, +y toward the visor, +z up.

TITLE
GL1-011 Base plate

PROJECT / PART
GreenLine GL-1 electronic ball marker - base plate

MATERIAL / FINISH	PROCESS
PA12 (HP 3D HR PA 12), dyed black	HP Multi Jet Fusion + vapor smoothing
GENERAL TOLERANCE	SCALE (A3) / UNITS
printed: +-0.3 or +-0.3 % (bureau MJF), as printed	4:1 / 20:1 mm

STATUS	DWG REV / PARAMS	SHEET / DATE
PROVISIONAL - not released	C-EVT1 / C-EVT1	1 of 1 2026-11-11