


TOP VIEW 3:1

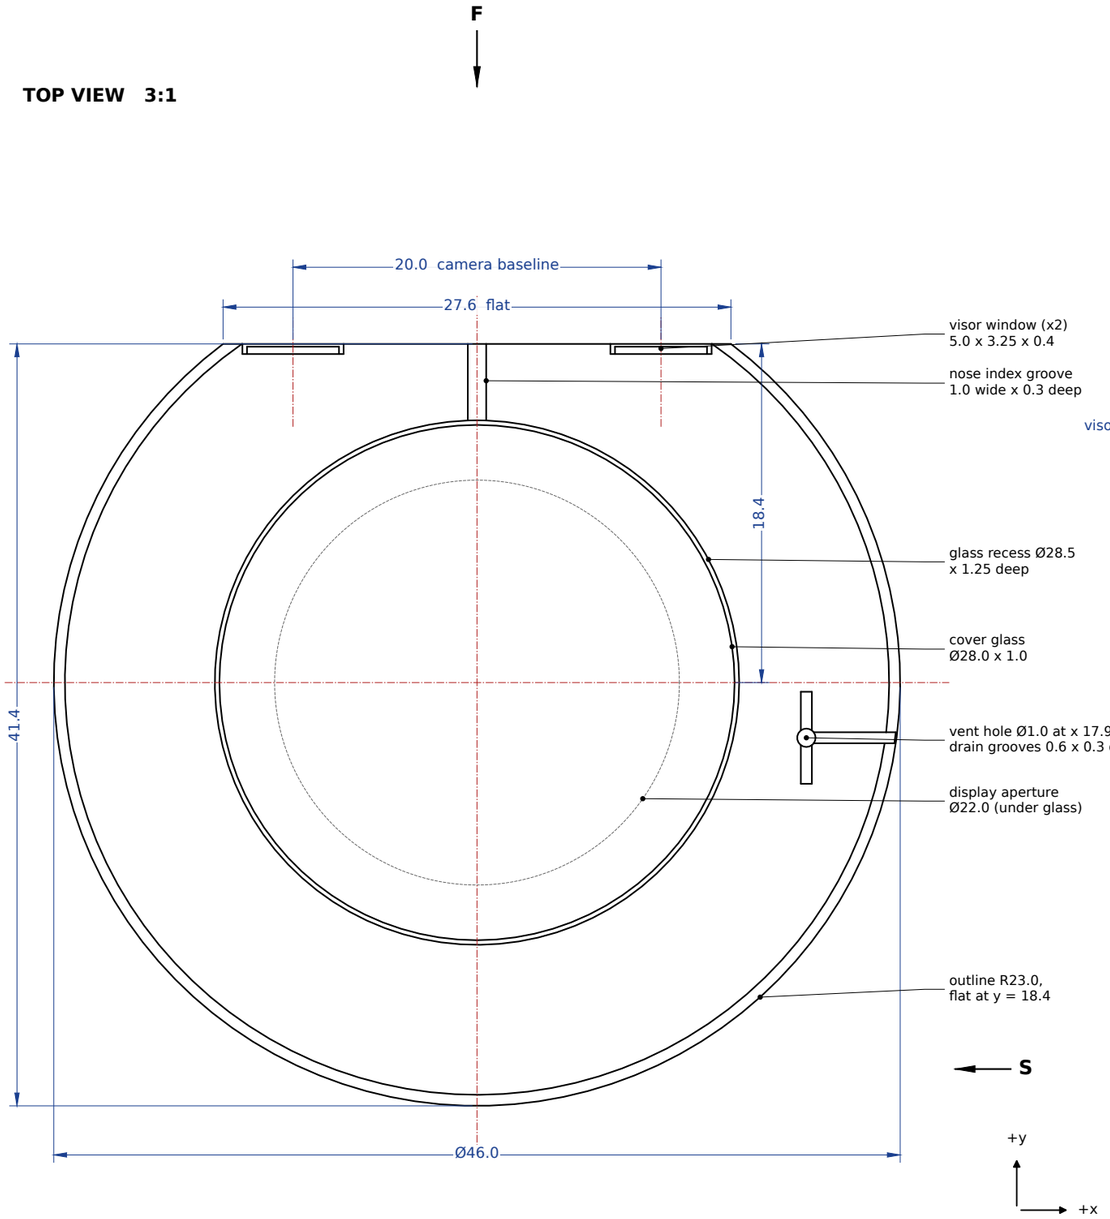

VIEW F - on the visor face, from +y 4:1 (+x is to the LEFT in this view)

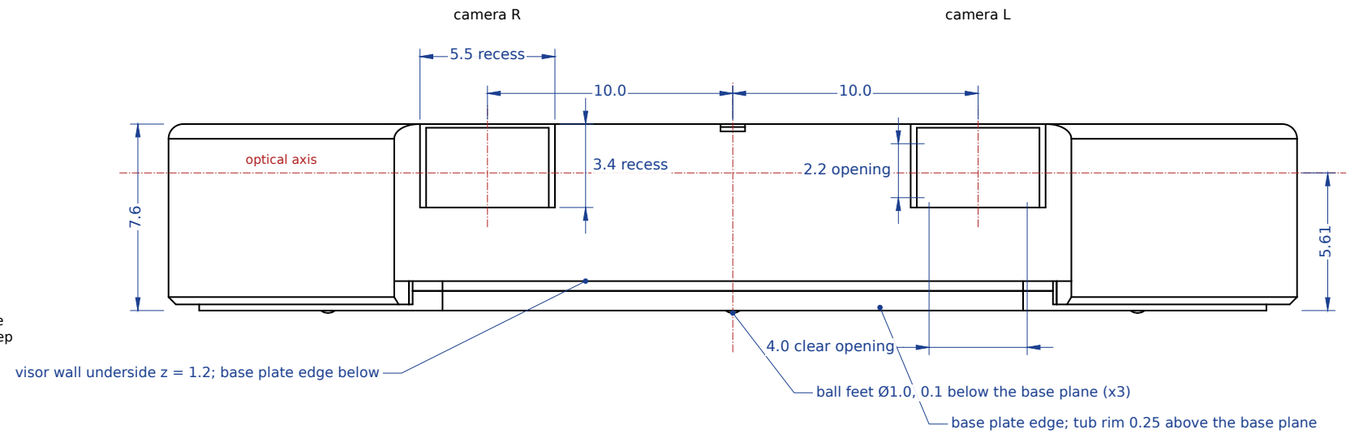

VIEW S - from +x 4:1

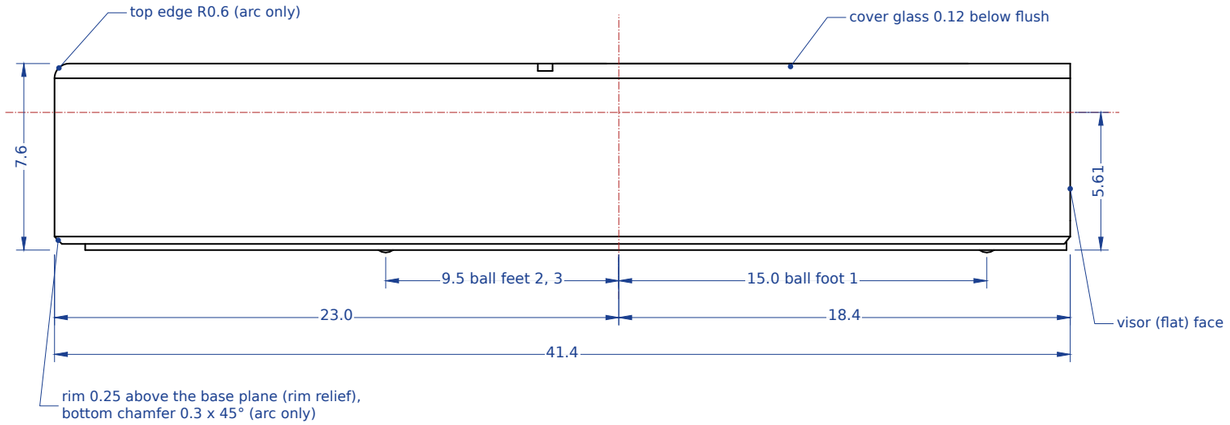

Item	Value	Source
Envelope	Ø46.0 x 7.6	YAML envelope
Visor flat	y = 18.4, 27.6 wide	YAML / derived
Camera baseline	20.0 (x = +-10.0)	YAML cameras
Optical axis height	5.61	YAML prisms
Field required	+-26.0° h, +17.6° (14.5° guaranteed) / -8.0° v	YAML cameras
Ball feet	Ø1.0, 0.1 proud, at (0, 15.0), (+-16.5, -9.5)	YAML feet
Rim relief	tub wall from z = 0.25	YAML envelope

NOTES

1. Outline of the assembled marker. Datum: the base plane z = 0 = underside of the base plate; the three ball feet protrude 0.1 mm below it and the rim of the tub wall stays 0.25 mm above it (rim relief). Visor (flat) face at y = 18.4.
2. Envelope Ø46.0 x 7.6 mm. Rev D stack: base plate 0.8 (FR-4) + adhesive sheet 0.2, PCB at z 1.0 to 1.8; optical axis 5.61 above the base plane. Camera baseline 20.0 (x = +-10.0). Cover glass 0.12 below the top face.
3. Camera windows 5.0 x 3.25 x 0.4 mm borosilicate, centred on x = +-10.0, in recesses 5.5 wide x 0.55 deep from z = 4.2 to the top face: glass 0.15 below the visor face, its top edge 0.15 below the tub top. Clear opening 4.0 wide, z = 4.6 to 6.8.
4. Sections A-A and B-B: GL1-002. Parts: GL1-010 tub, GL1-011 base plate (FR-4), GL1-012 base plate (PA12 alternative), GL1-013 baffle ring, GL1-020 cradle.
5. Nothing has been built. All purchased-part envelopes are provisional until checked against manufacturer drawings.

Generated from the CAD model by cad/drawings.py - dimensions are nominal model values, computed, not typed. Frame: origin at puck centre on the base plane, +x right, +y toward the visor, +z up.

TITLE
GL1-001 Marker assembly - outline

PROJECT / PART
GreenLine GL-1 electronic ball marker - marker assembly

MATERIAL / FINISH	PROCESS	
see parts list in README.md	assembly (bonded)	
GENERAL TOLERANCE	SCALE (A3) / UNITS	
nominal CAD dimensions, reference only	3:1 / 4:1 mm	
STATUS	DWG REV / PARAMS	SHEET / DATE
PROVISIONAL - not released	D-EVT1.2 / D-EVT1	1 of 1 2026-11-13