


## RN4678 (SPP) firmware 1.00.5 Configuration

To set factory default, issue the follow commands

SF,1

R,1

The following V (version) and D (display basic configuration) should display as shown in screen shot:

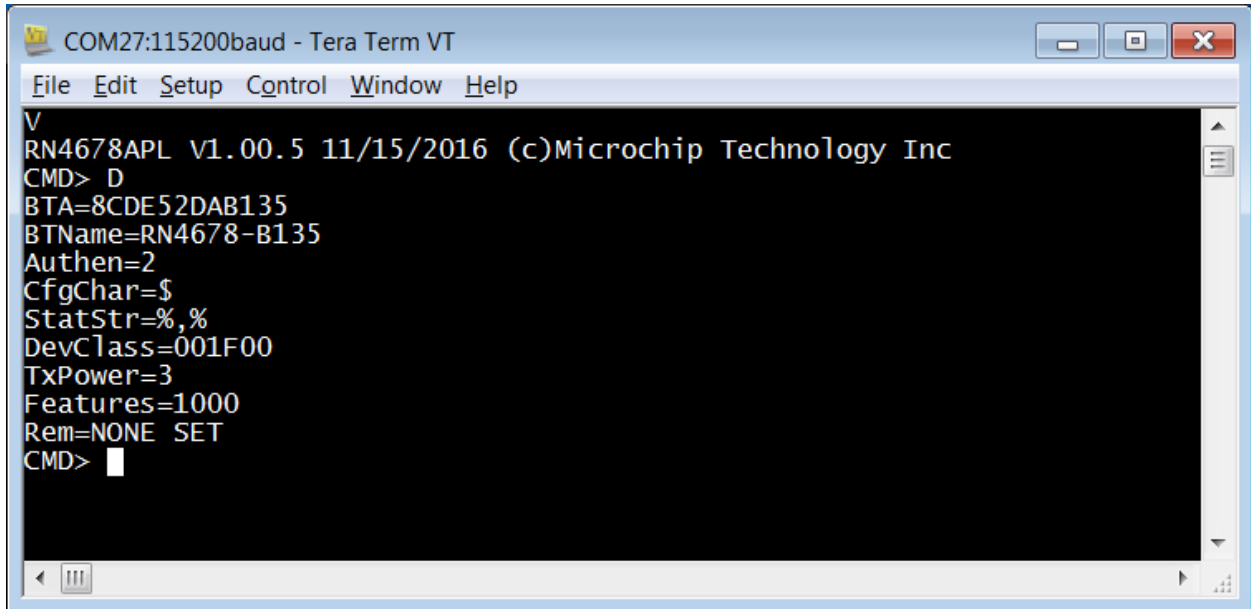

```
COM27:115200baud - Tera Term VT
File Edit Setup Control Window Help
V
RN4678APL v1.00.5 11/15/2016 (c)Microchip Technology Inc
CMD> D
BTA=8CDE52DAB135
BTName=RN4678-B135
Authen=2
CfgChar=$
StatStr=%,%
DevClass=001F00
TxPower=3
Features=1000
Rem=NONE SET
CMD> 
```