12-Lead Very Thin Plastic Quad Flat, No Lead Package (6MW) - 3x2x0.9 mm Body [VQFN] with 1.162x0.197 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

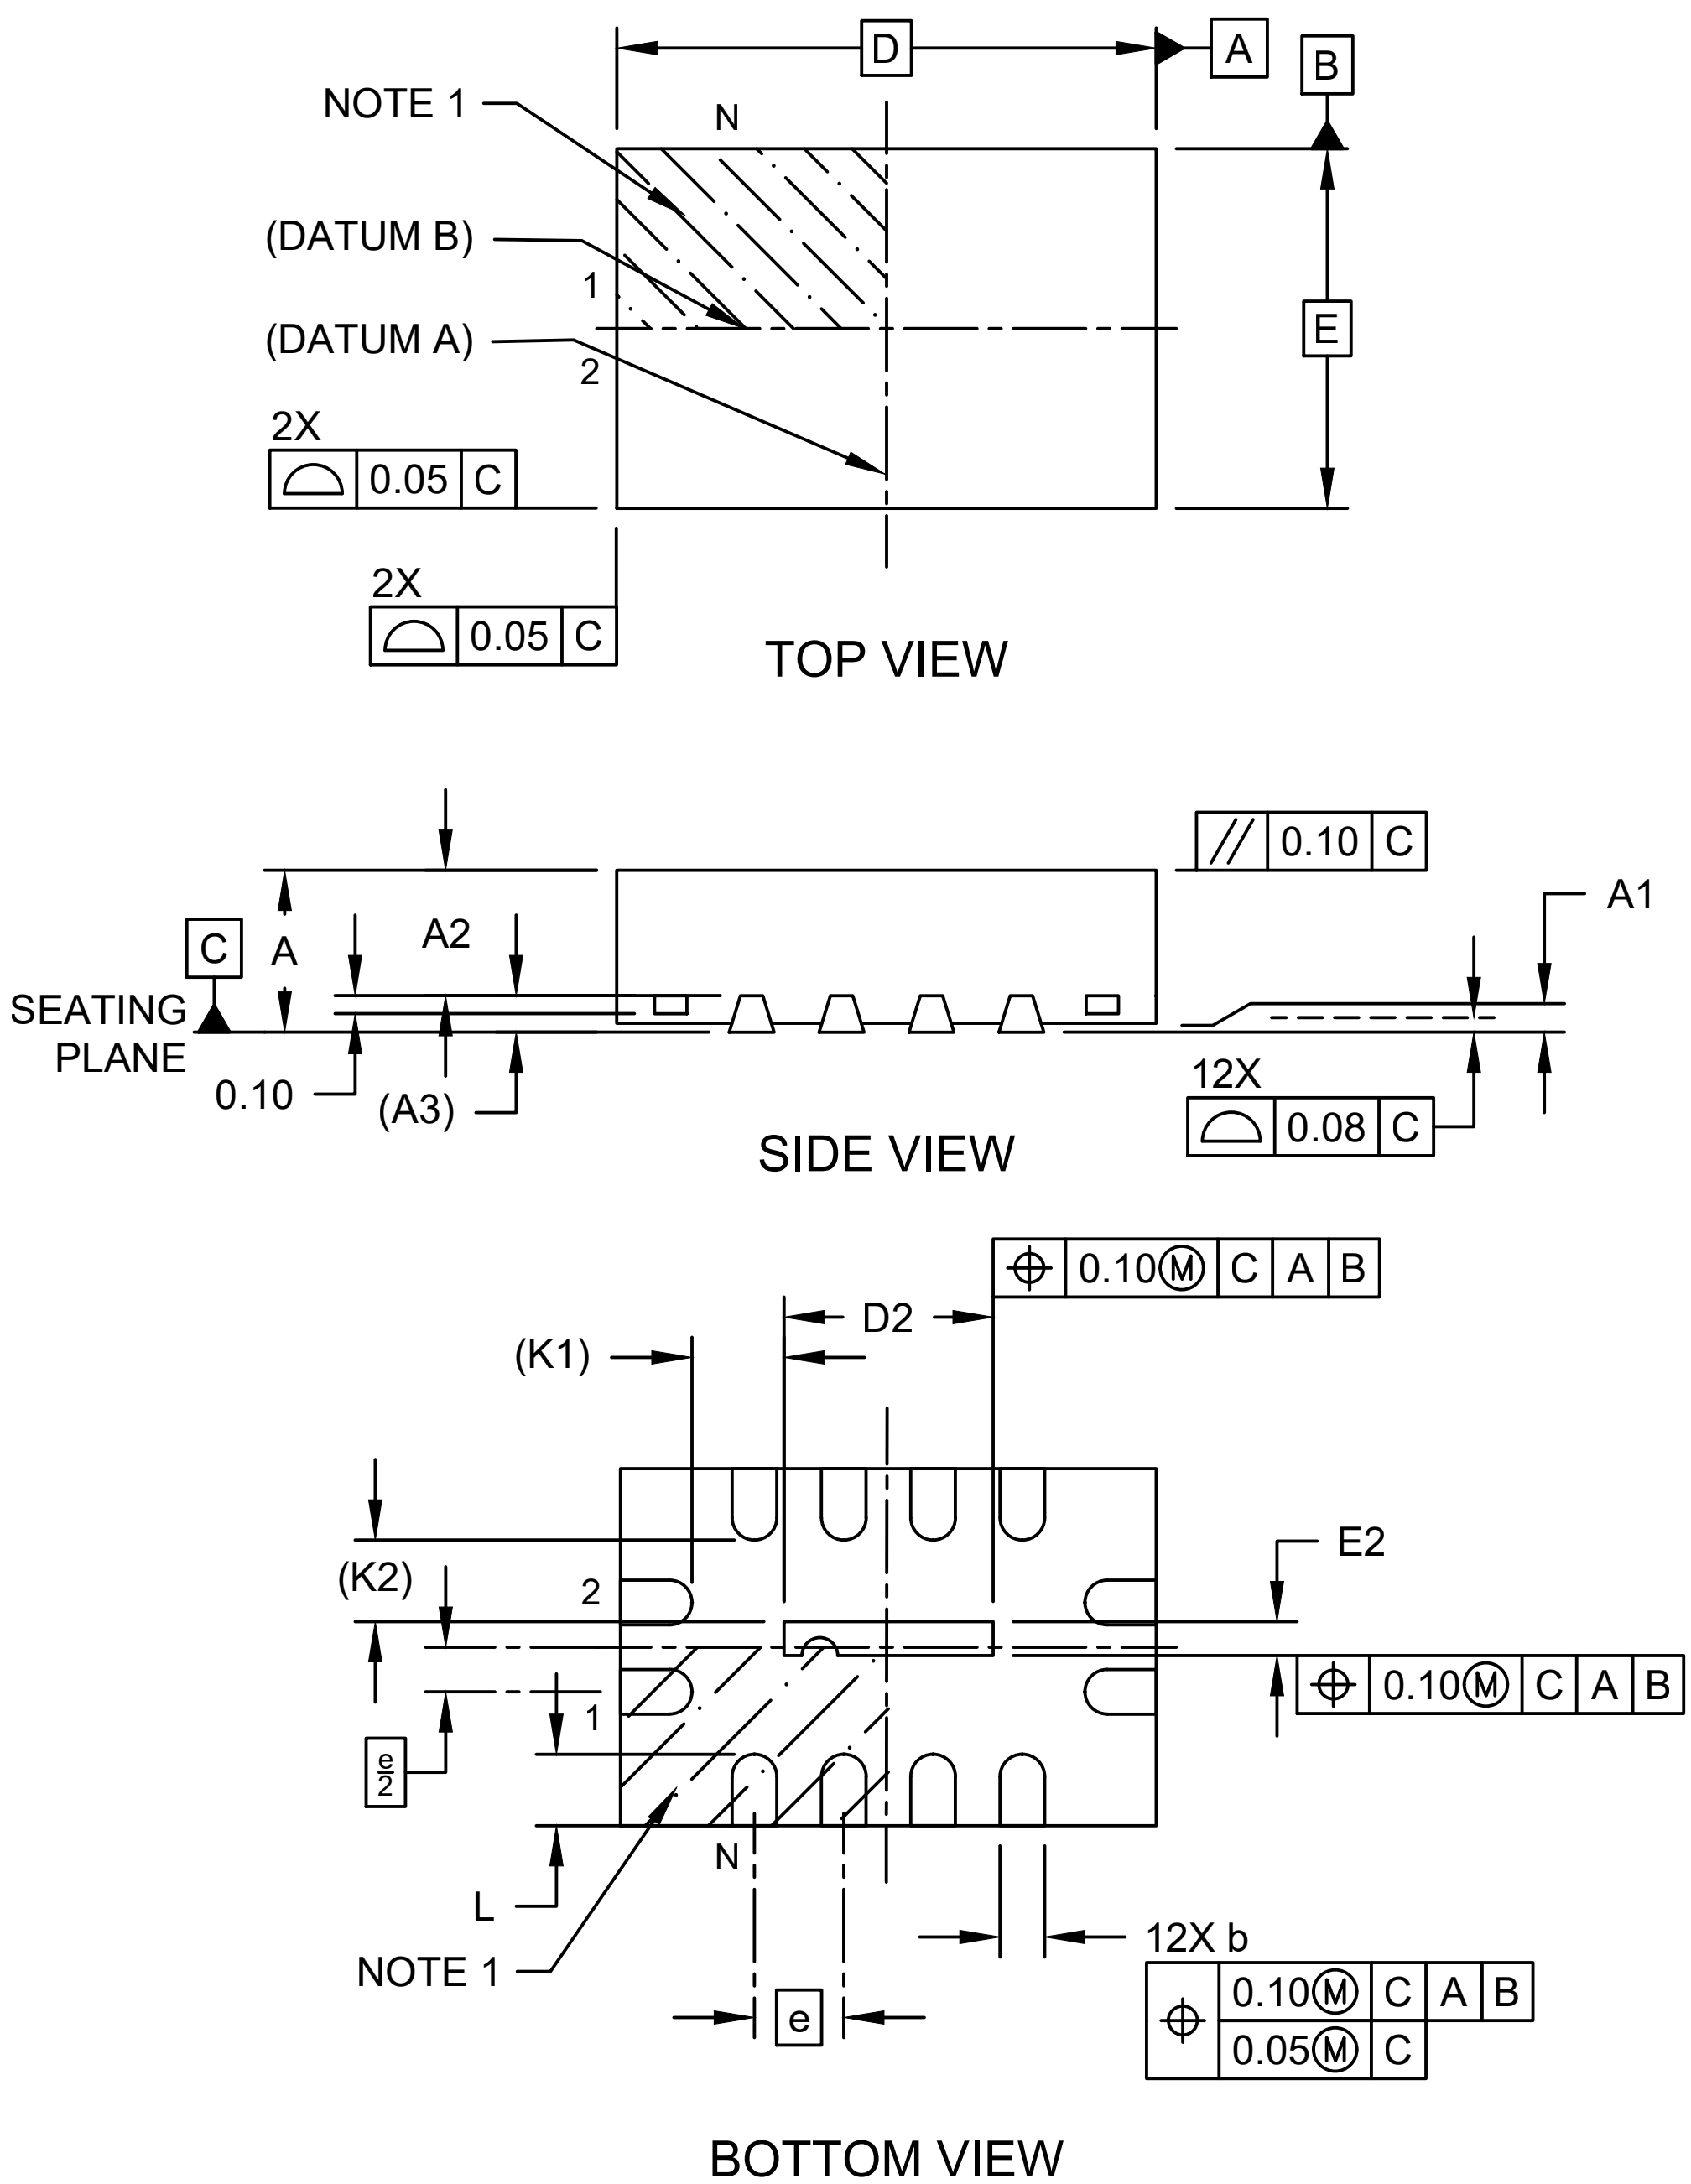

Microchip Technology Drawing C04-00626 Rev C Sheet 1 of 2

12-Lead Very Thin Plastic Quad Flat, No Lead Package (6MW) - 3x2x0.9 mm Body [VQFN] with 1.162x0.197 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

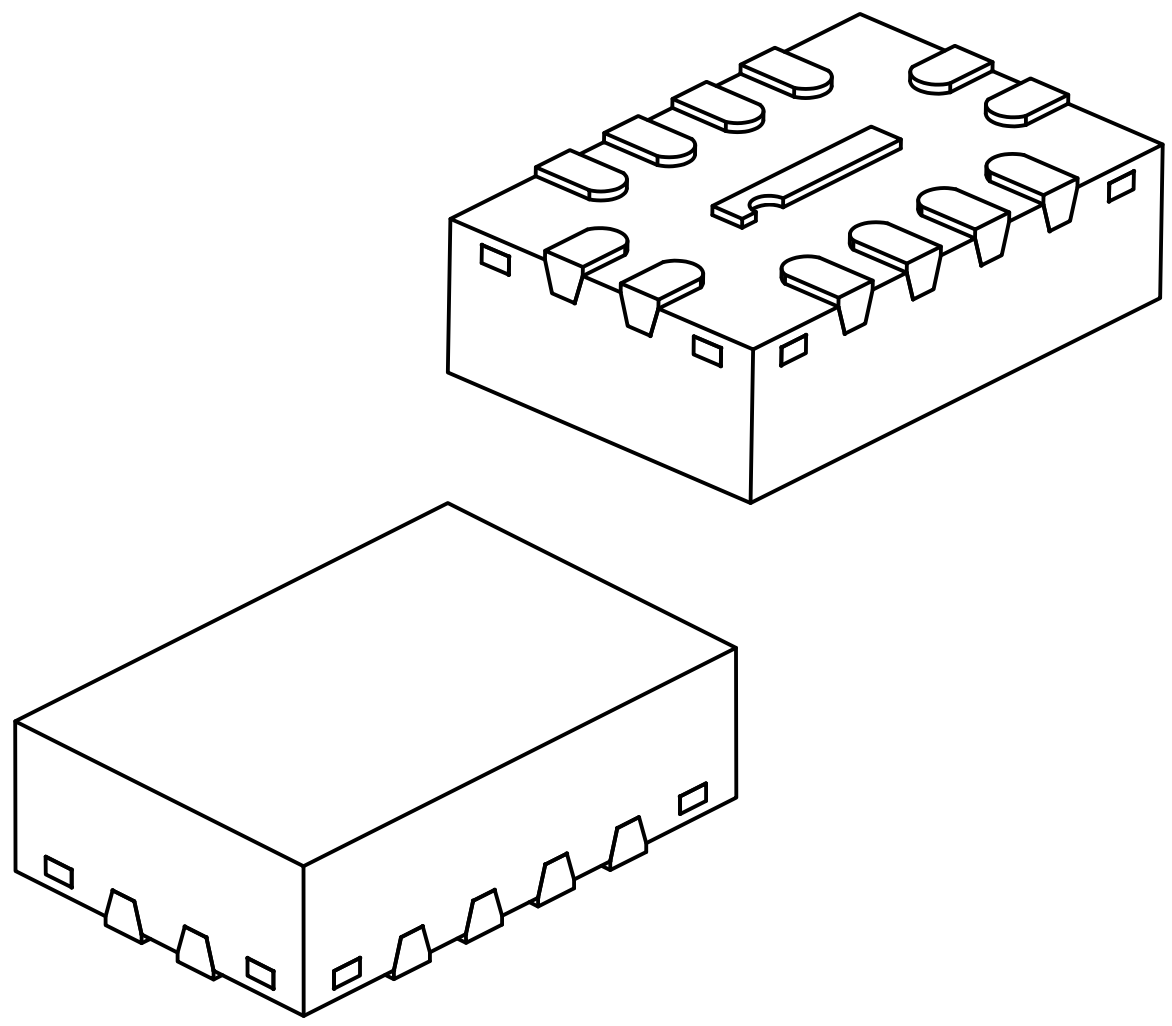

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		012	
Pitch	e		0.50 BSC	
Overall Height	A	–	–	0.90
Standoff	A1	0.00	–	0.05
Mold Thickness	A2	–	0.65	0.70
Terminal Thickness	A3		0.203 REF	
Overall Length	D		3.00 BSC	
Exposed Pad Length	D2	1.062	1.162	1.262
Overall Width	E		2.00 BSC	
Exposed Pad Width	E2	0.097	0.197	0.297
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K1		0.519 REF	
Terminal-to-Exposed-Pad	K2		0.458 REF	

Notes:

1. Pin 1 visual index feature may vary but must be located within the hatched area.
2. Package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00626 Rev C Sheet 2 of 2

12-Lead Very Thin Plastic Quad Flat, No Lead Package (6MW) - 3x2x0.9 mm Body [VQFN] with 1.162x0.197 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

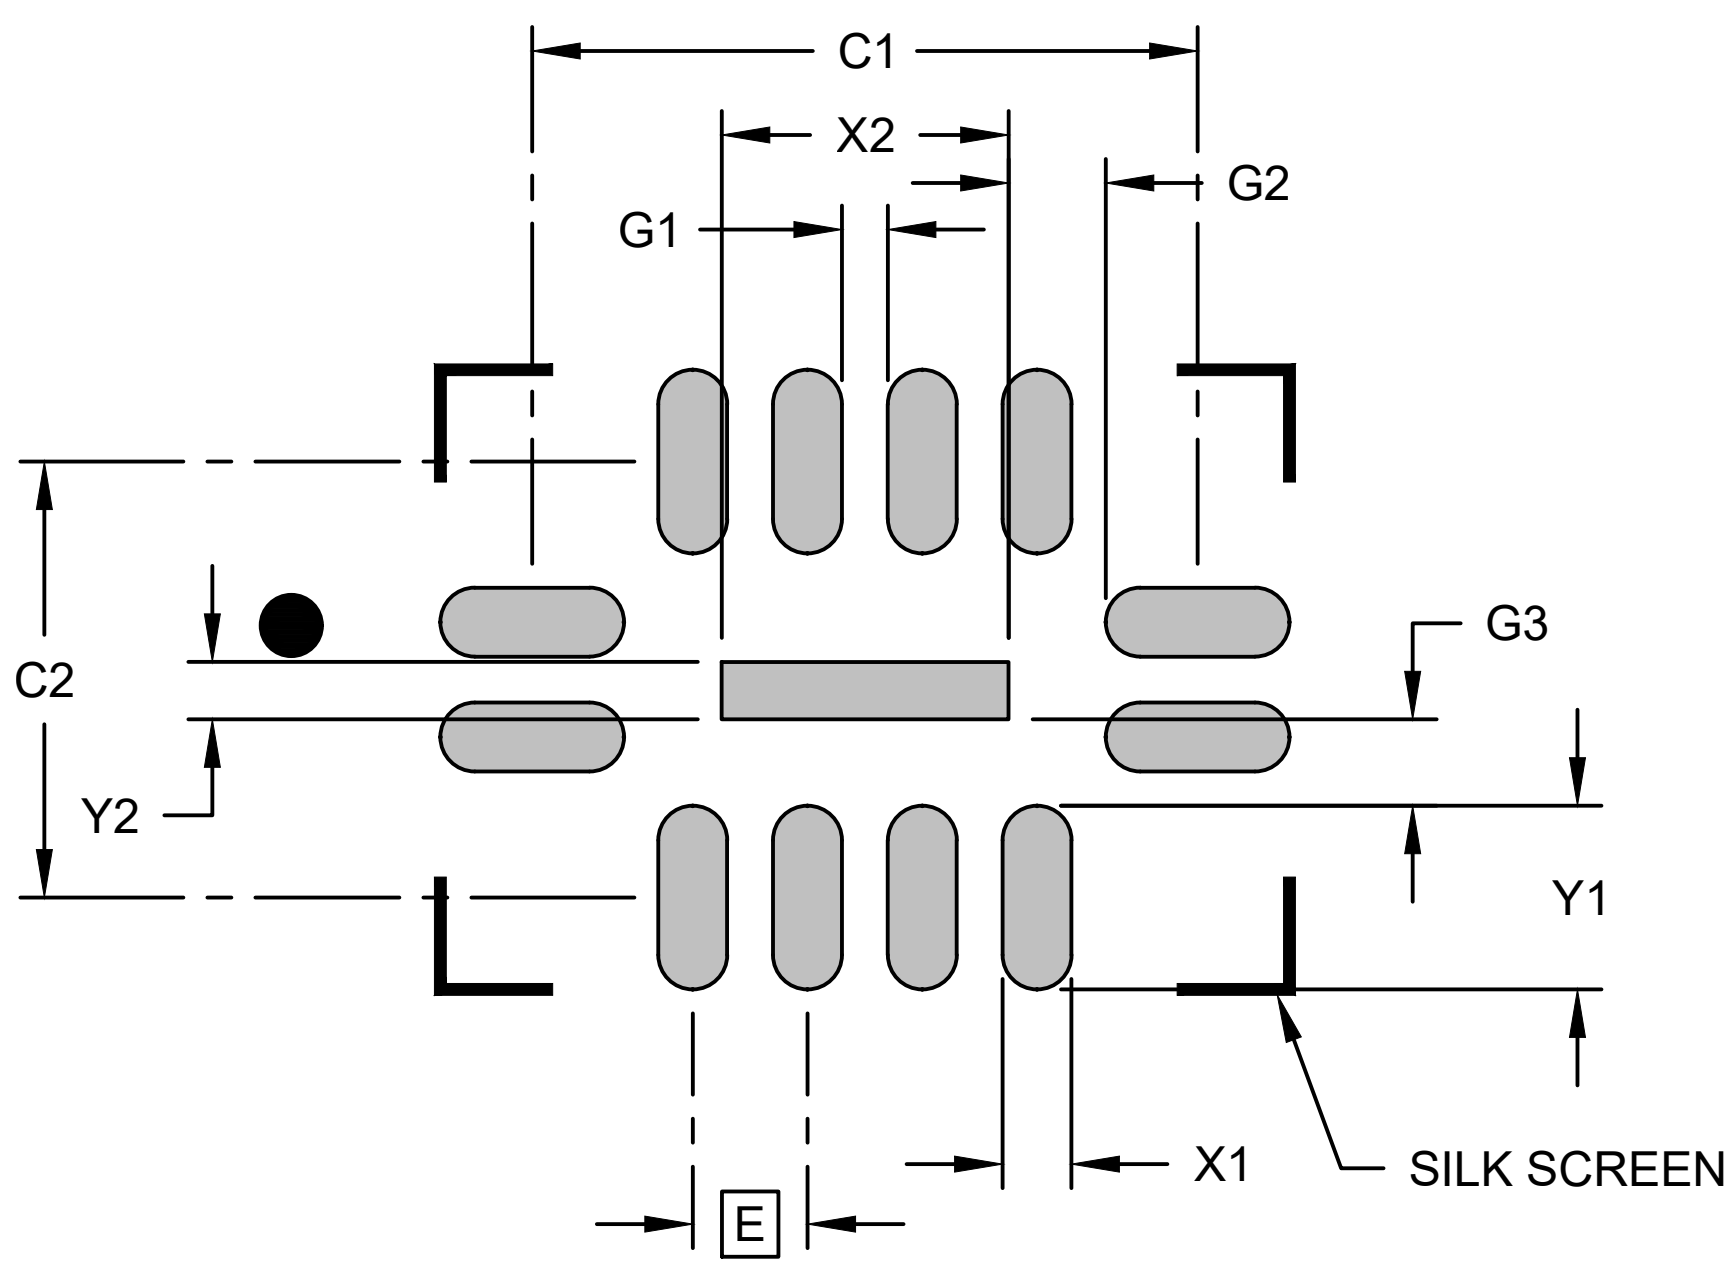

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Center Pad Width	X2			1.25
Center Pad Length	Y2			0.25
Contact Pad Spacing	C1		2.90	
Contact Pad Spacing	C2		1.90	
Contact Pad Width (X12)	X1			0.30
Contact Pad Length (X12)	Y1			0.85
Contact Pad to Contact Pad (X8)	G1	0.20		
Contact Pad to Center Pad (X2)	G2		0.519 REF	
Contact Pad to Center Pad (X4)	G3		0.458 REF	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process.

Microchip Technology Drawing C04-02626 Rev C