49-Lead Low Profile Fine Pitch Land Grid Array (DAB) - 5.5x4.5x1.4 mm Body [LFBGA]
Atmel Legacy Global Package Code DRZ

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

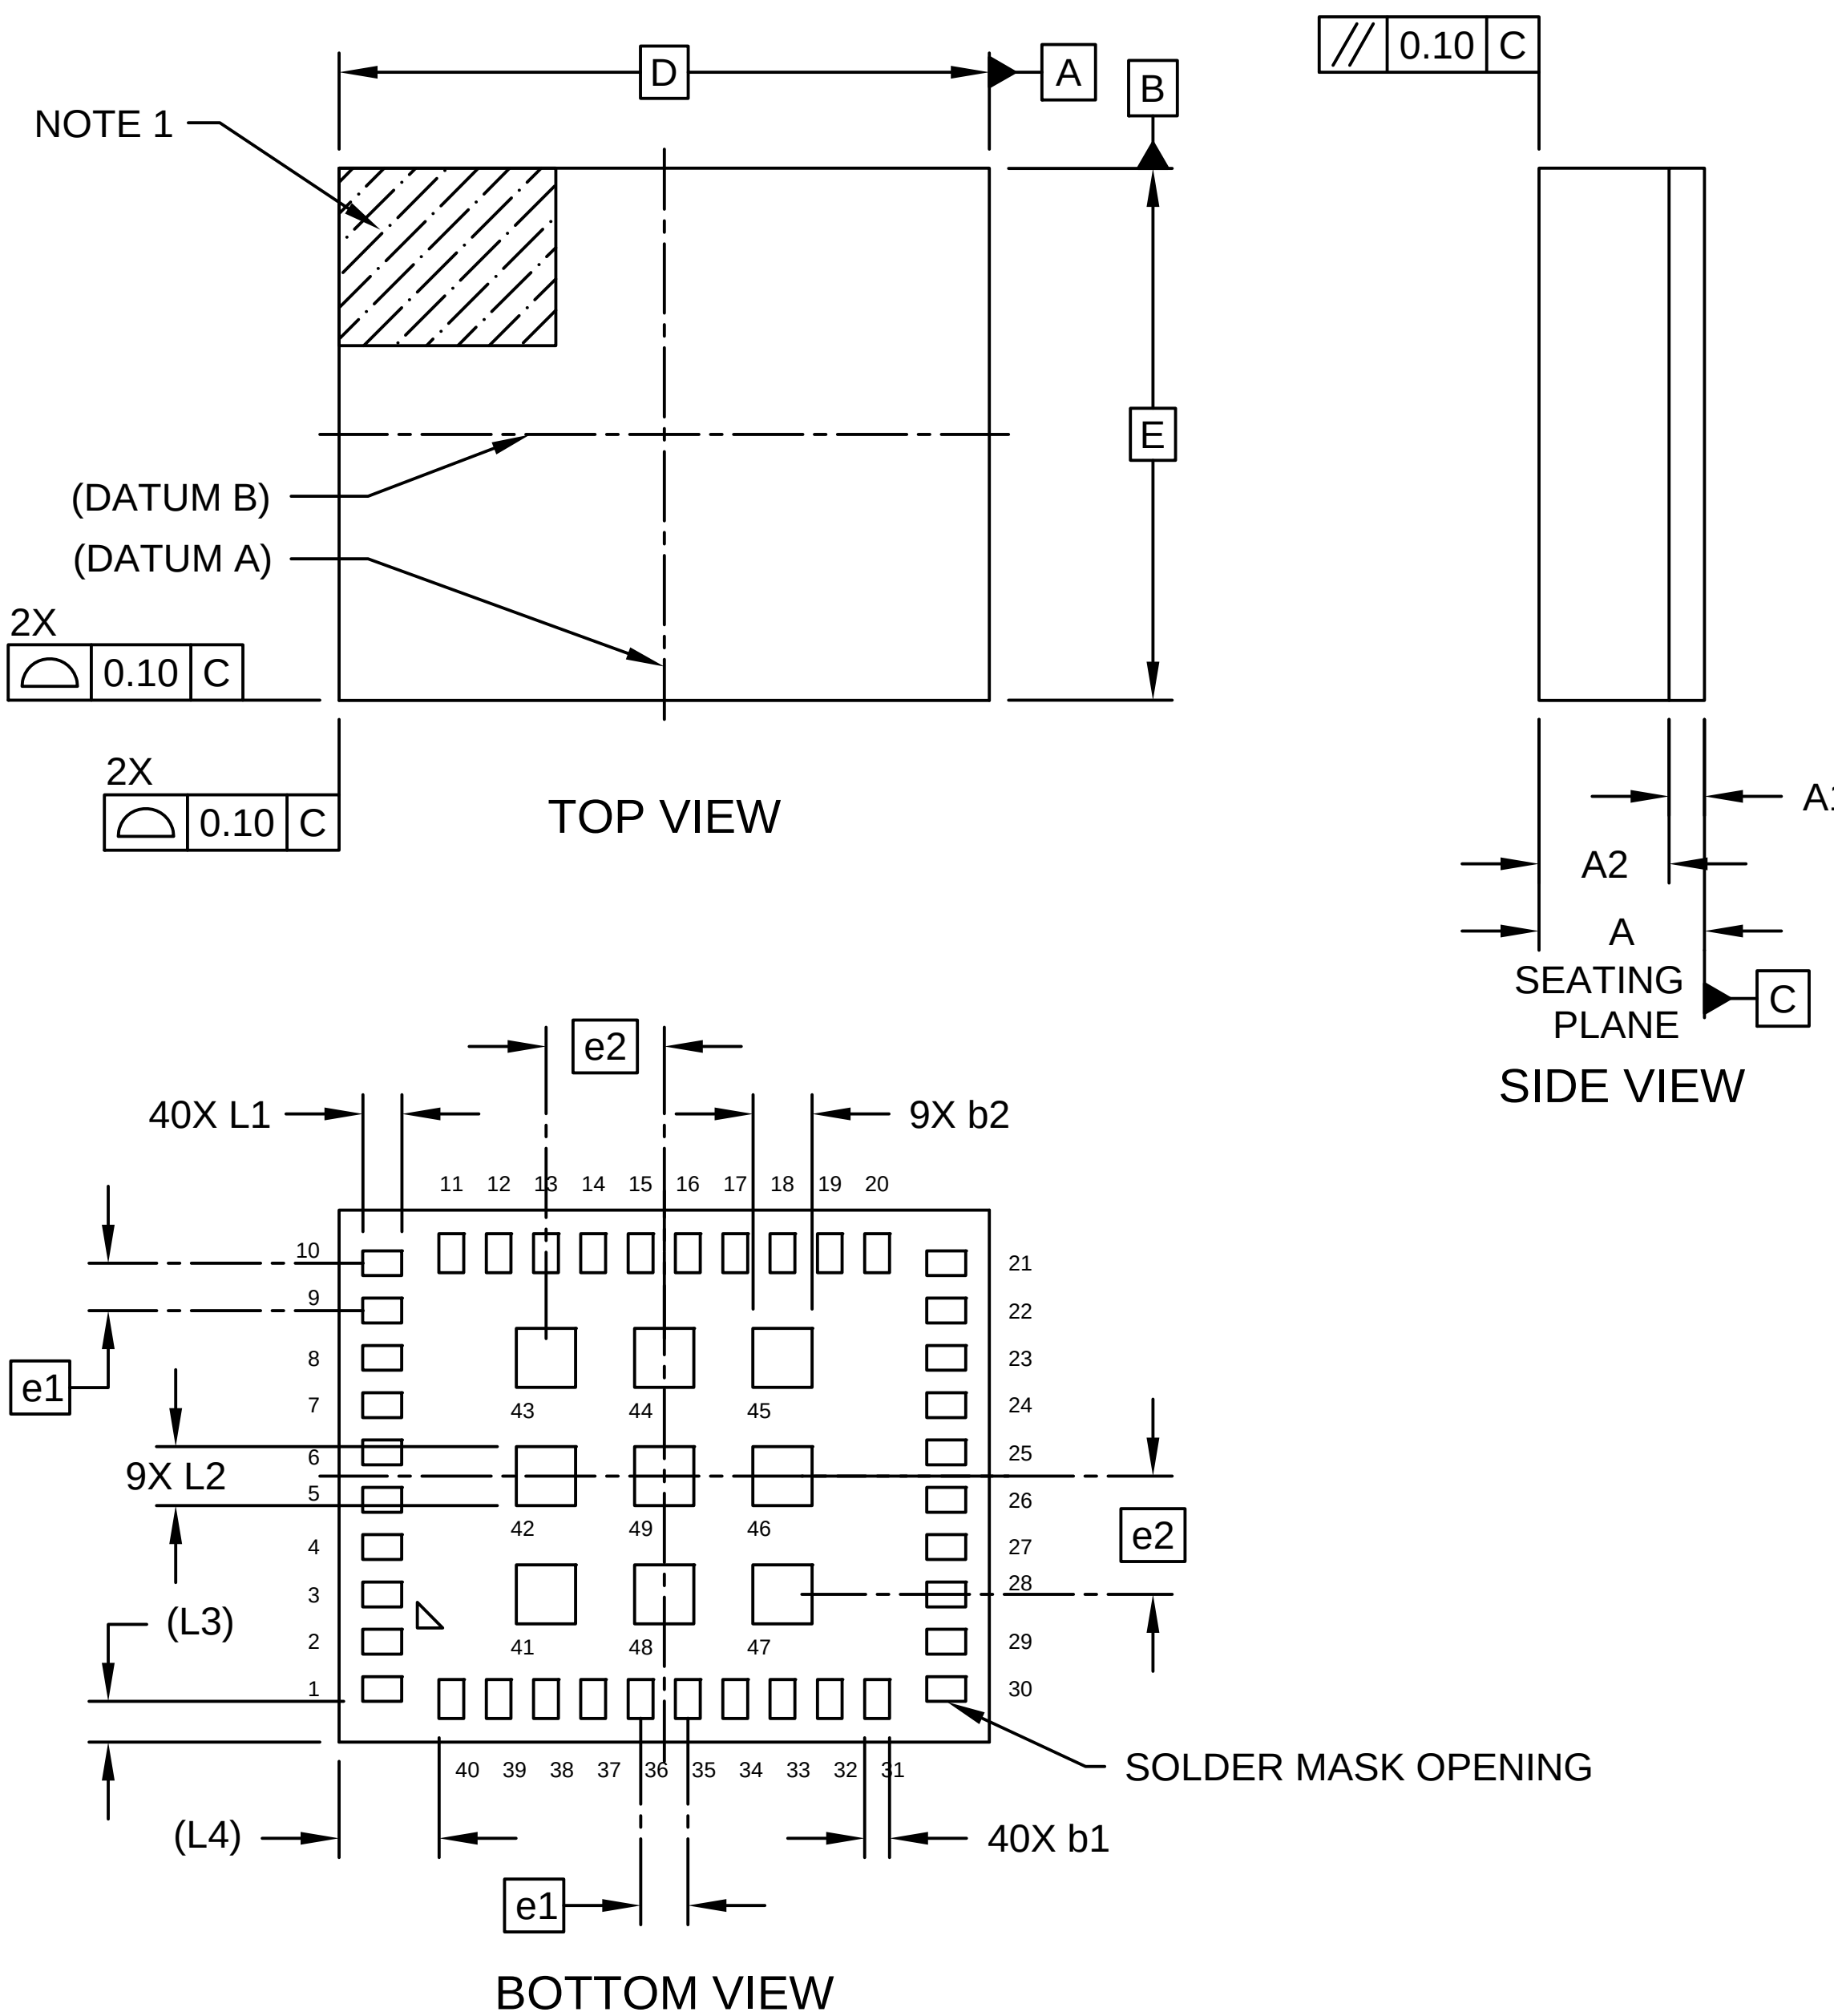

Microchip Technology Drawing C04-21477 Rev A Sheet 1 of 2

49-Lead Low Profile Fine Pitch Land Grid Array (DAB) - 5.5x4.5x1.4 mm Body [LFBGA]
Atmel Legacy Global Package Code DRZ

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

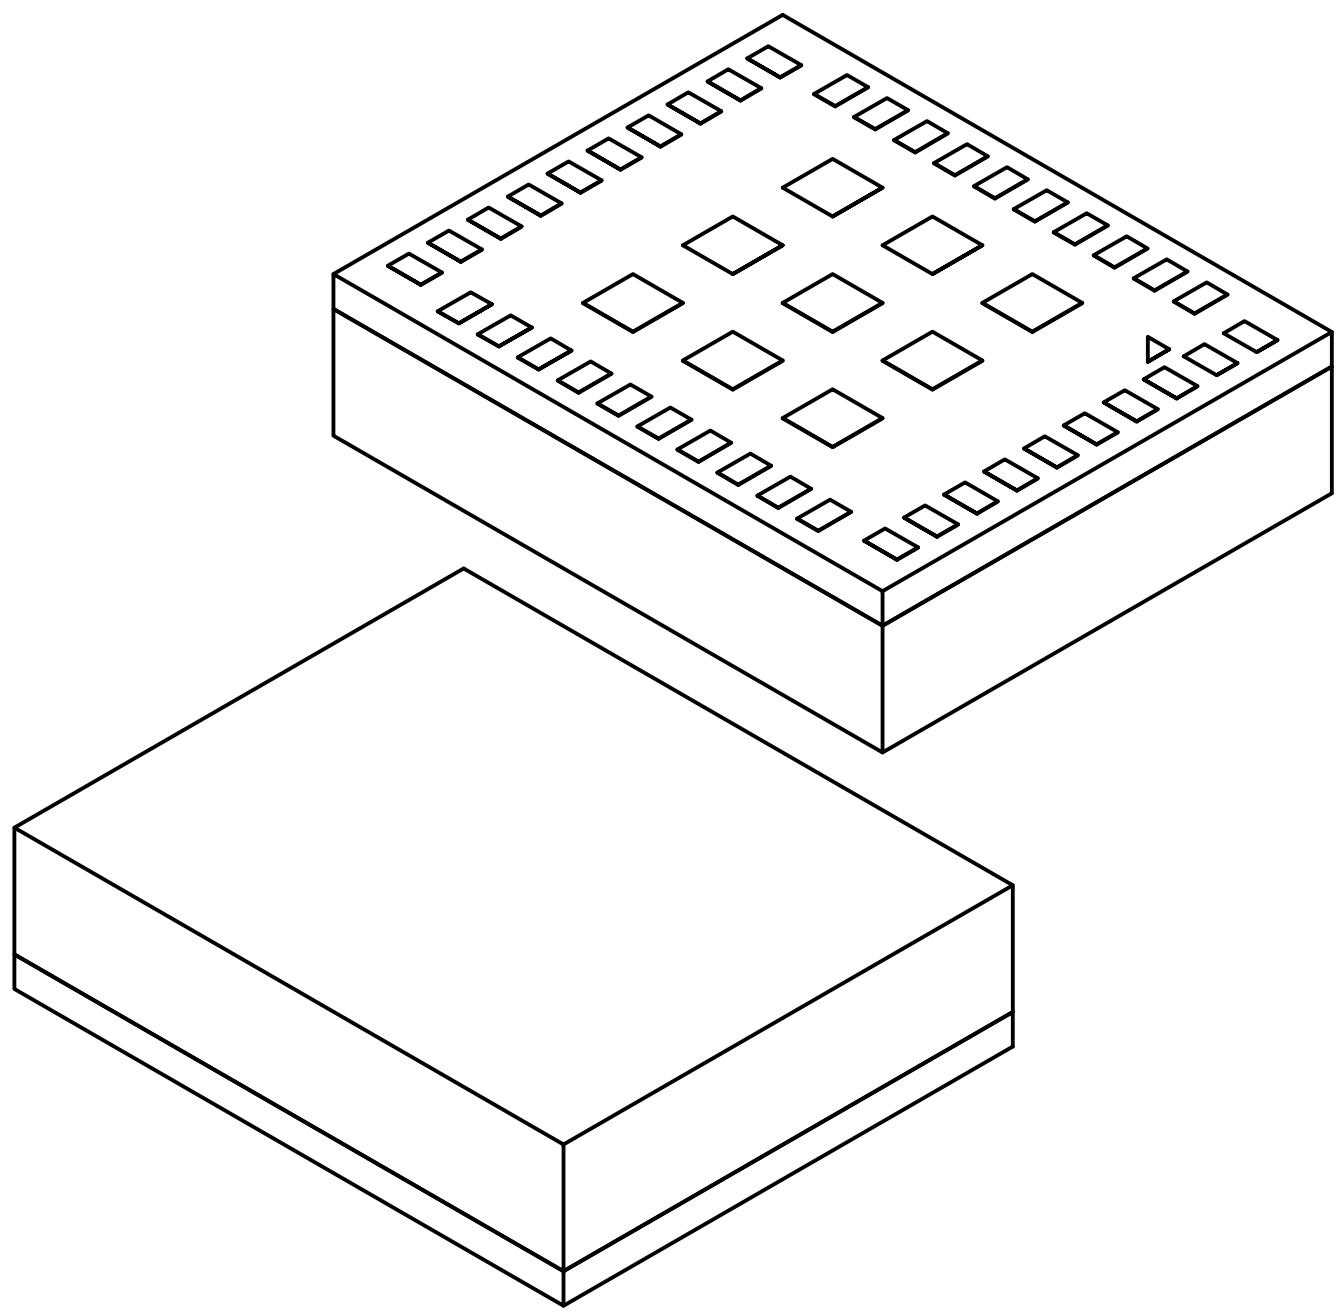

		Units	MILLIMETERS		
		Dimension Limits	MIN	NOM	MAX
Number of Terminals	N			49	
Pitch	e1			0.40 BSC	
Pitch	e2			1.00 BSC	
Overall Height	A		-	-	1.40
Standoff	A1		0.23	0.26	0.29
Terminal Thickness	A2		1.00	1.05	1.10
Overall Length	D			5.50 BSC	
Overall Width	E			4.50 BSC	
Terminal Width	b1		-	0.21	-
Terminal Width	b2		-	0.50	-
Terminal Length	L1		-	0.33	-
Terminal Length	L2		-	0.50	-
Package Edge to Solder Mask Opeining	L3			0.34 REF	
Package Edge to Solder Mask Opeining	L4			0.85 REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

49-Lead Low Profile Fine Pitch Land Grid Array (DAB) - 4.5x5.5 mm Body [LFLGA]
Atmel Legacy Global Package Code DAZ

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

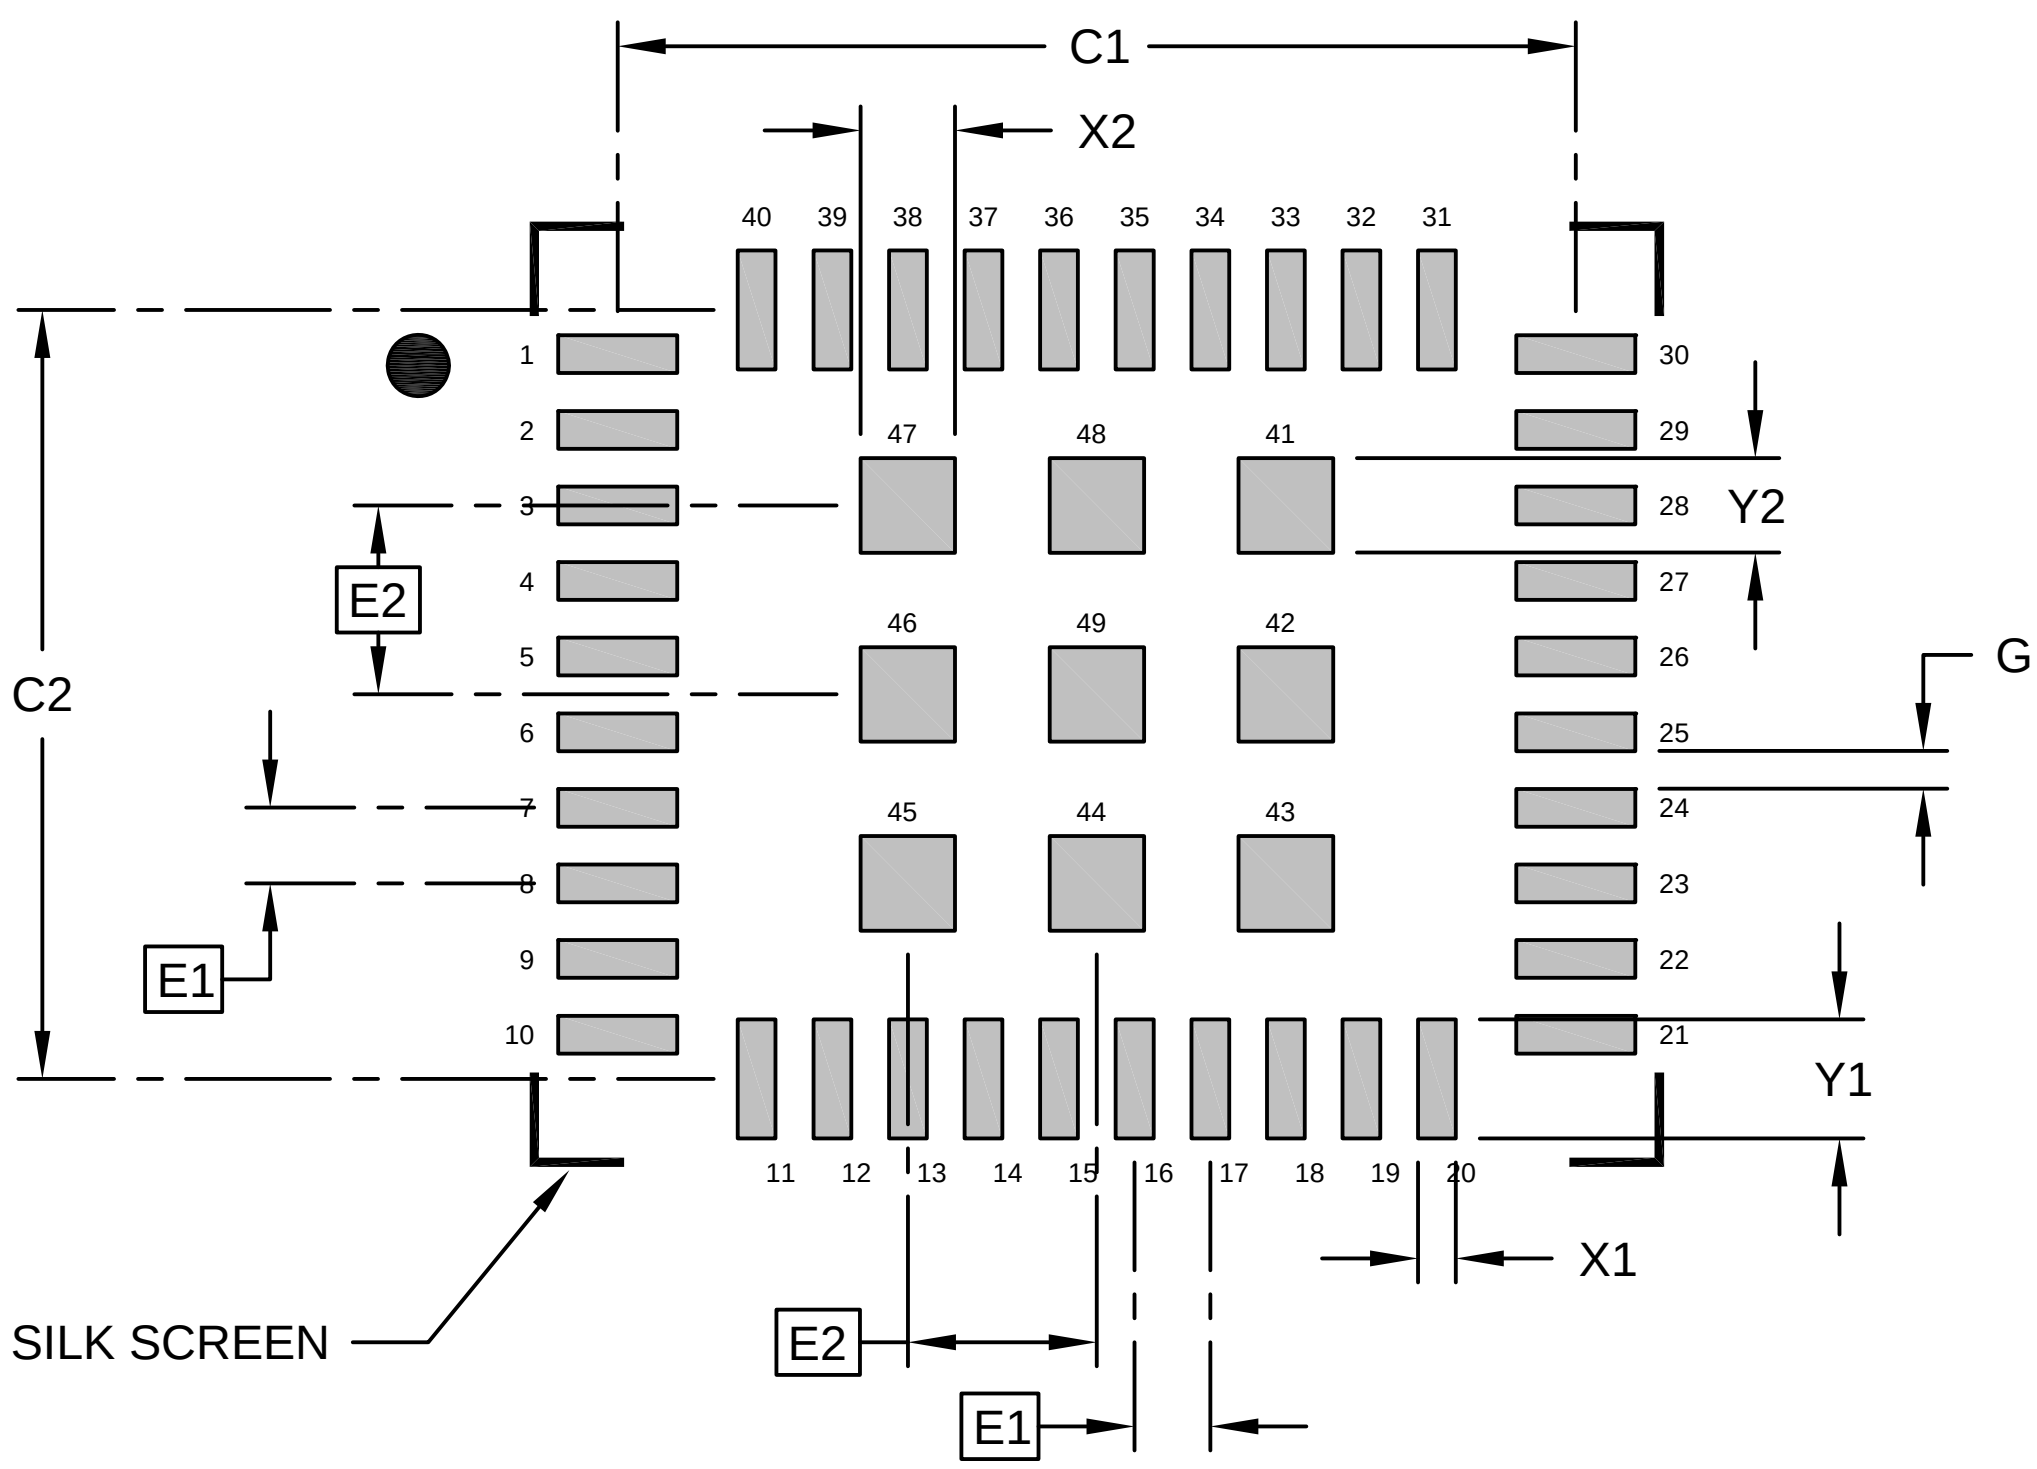

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E1	0.40 BSC		
Contact Pitch	E2	1.00 BSC		
Contact Pad Spacing	C1		5.07	
Contact Pad Spacing	C2		4.07	
Outer Contact Pad Width (X40)	X1			0.20
Outer Contact Pad Length (X40)	Y1			0.63
Inner Contact Width (X9)	X2			0.50
Inner Contact Length (X9)	Y2			0.50
Contact Pad to Contact Pad (X36)	G1	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23477 Rev A