100-Ball Thin-Profile Fine-Pitch Ball Grid Array - (9UW) 9x9x1.2mm [TFBGA]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

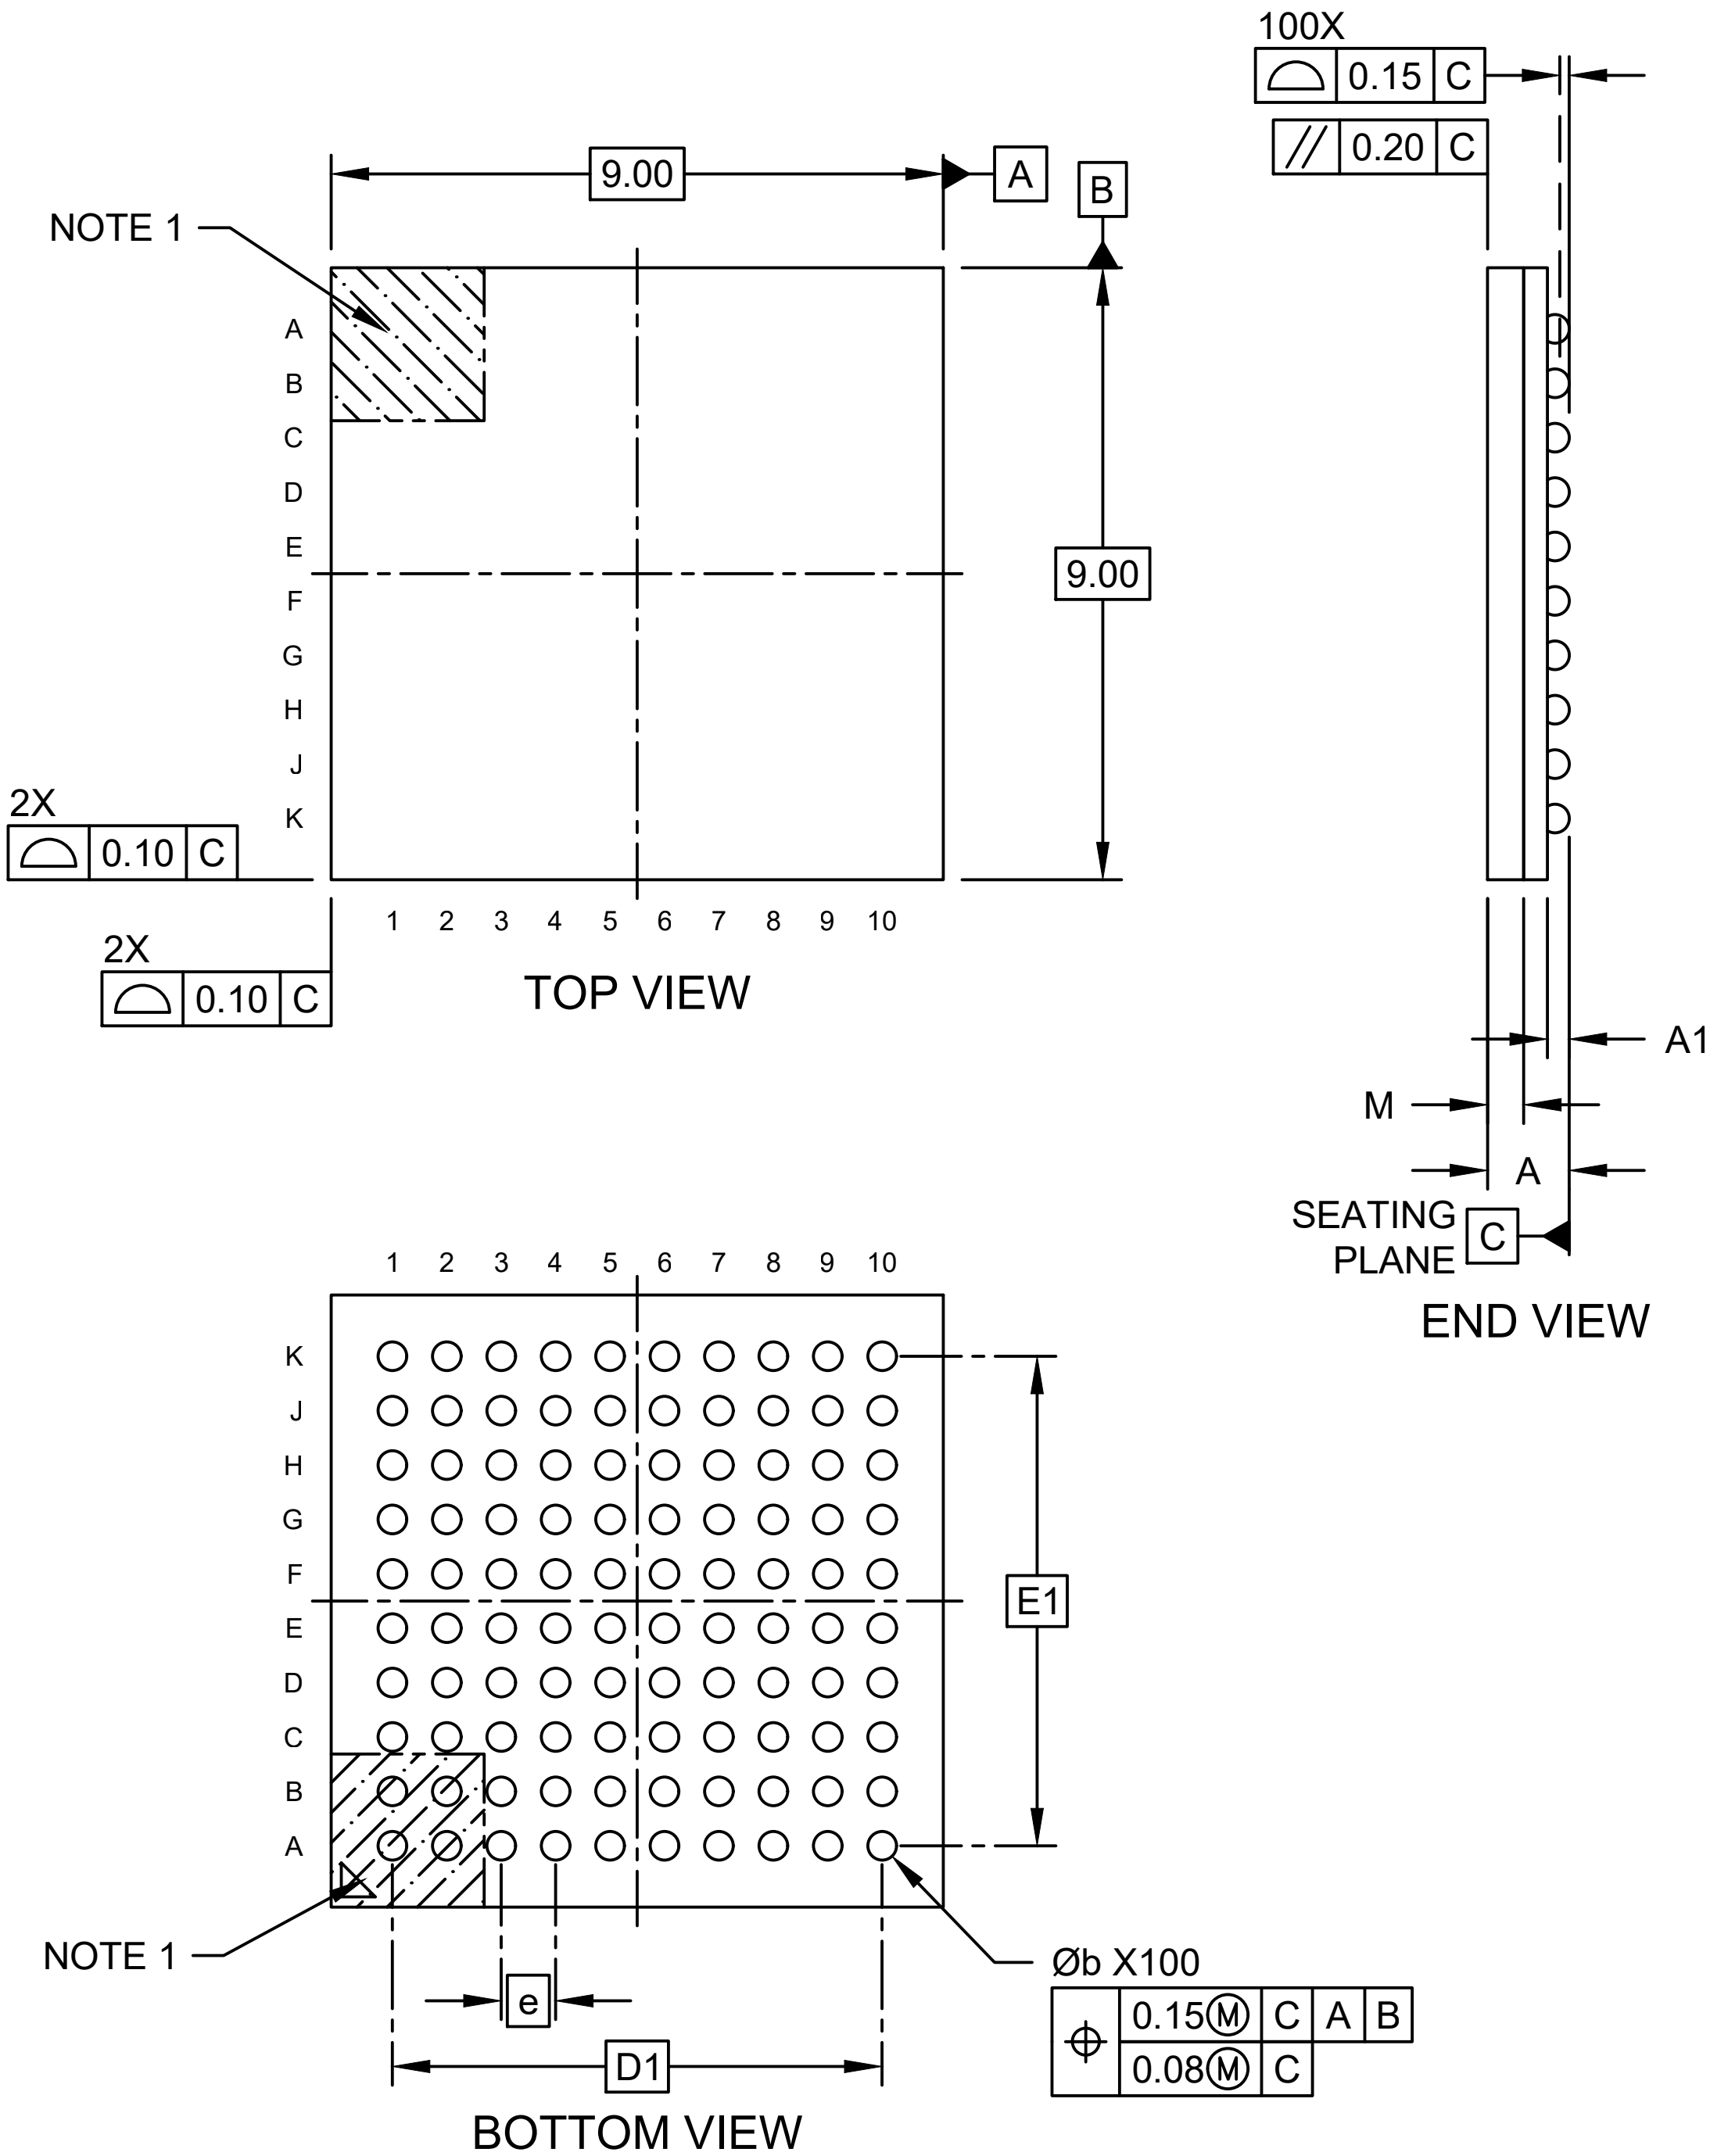

Microchip Technology Drawing C04-00691 Rev A Sheet 1 of 2

100-Ball Thin-Profile Fine-Pitch Ball Grid Array - (9UW) 9x9x1.2mm [TFBGA]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

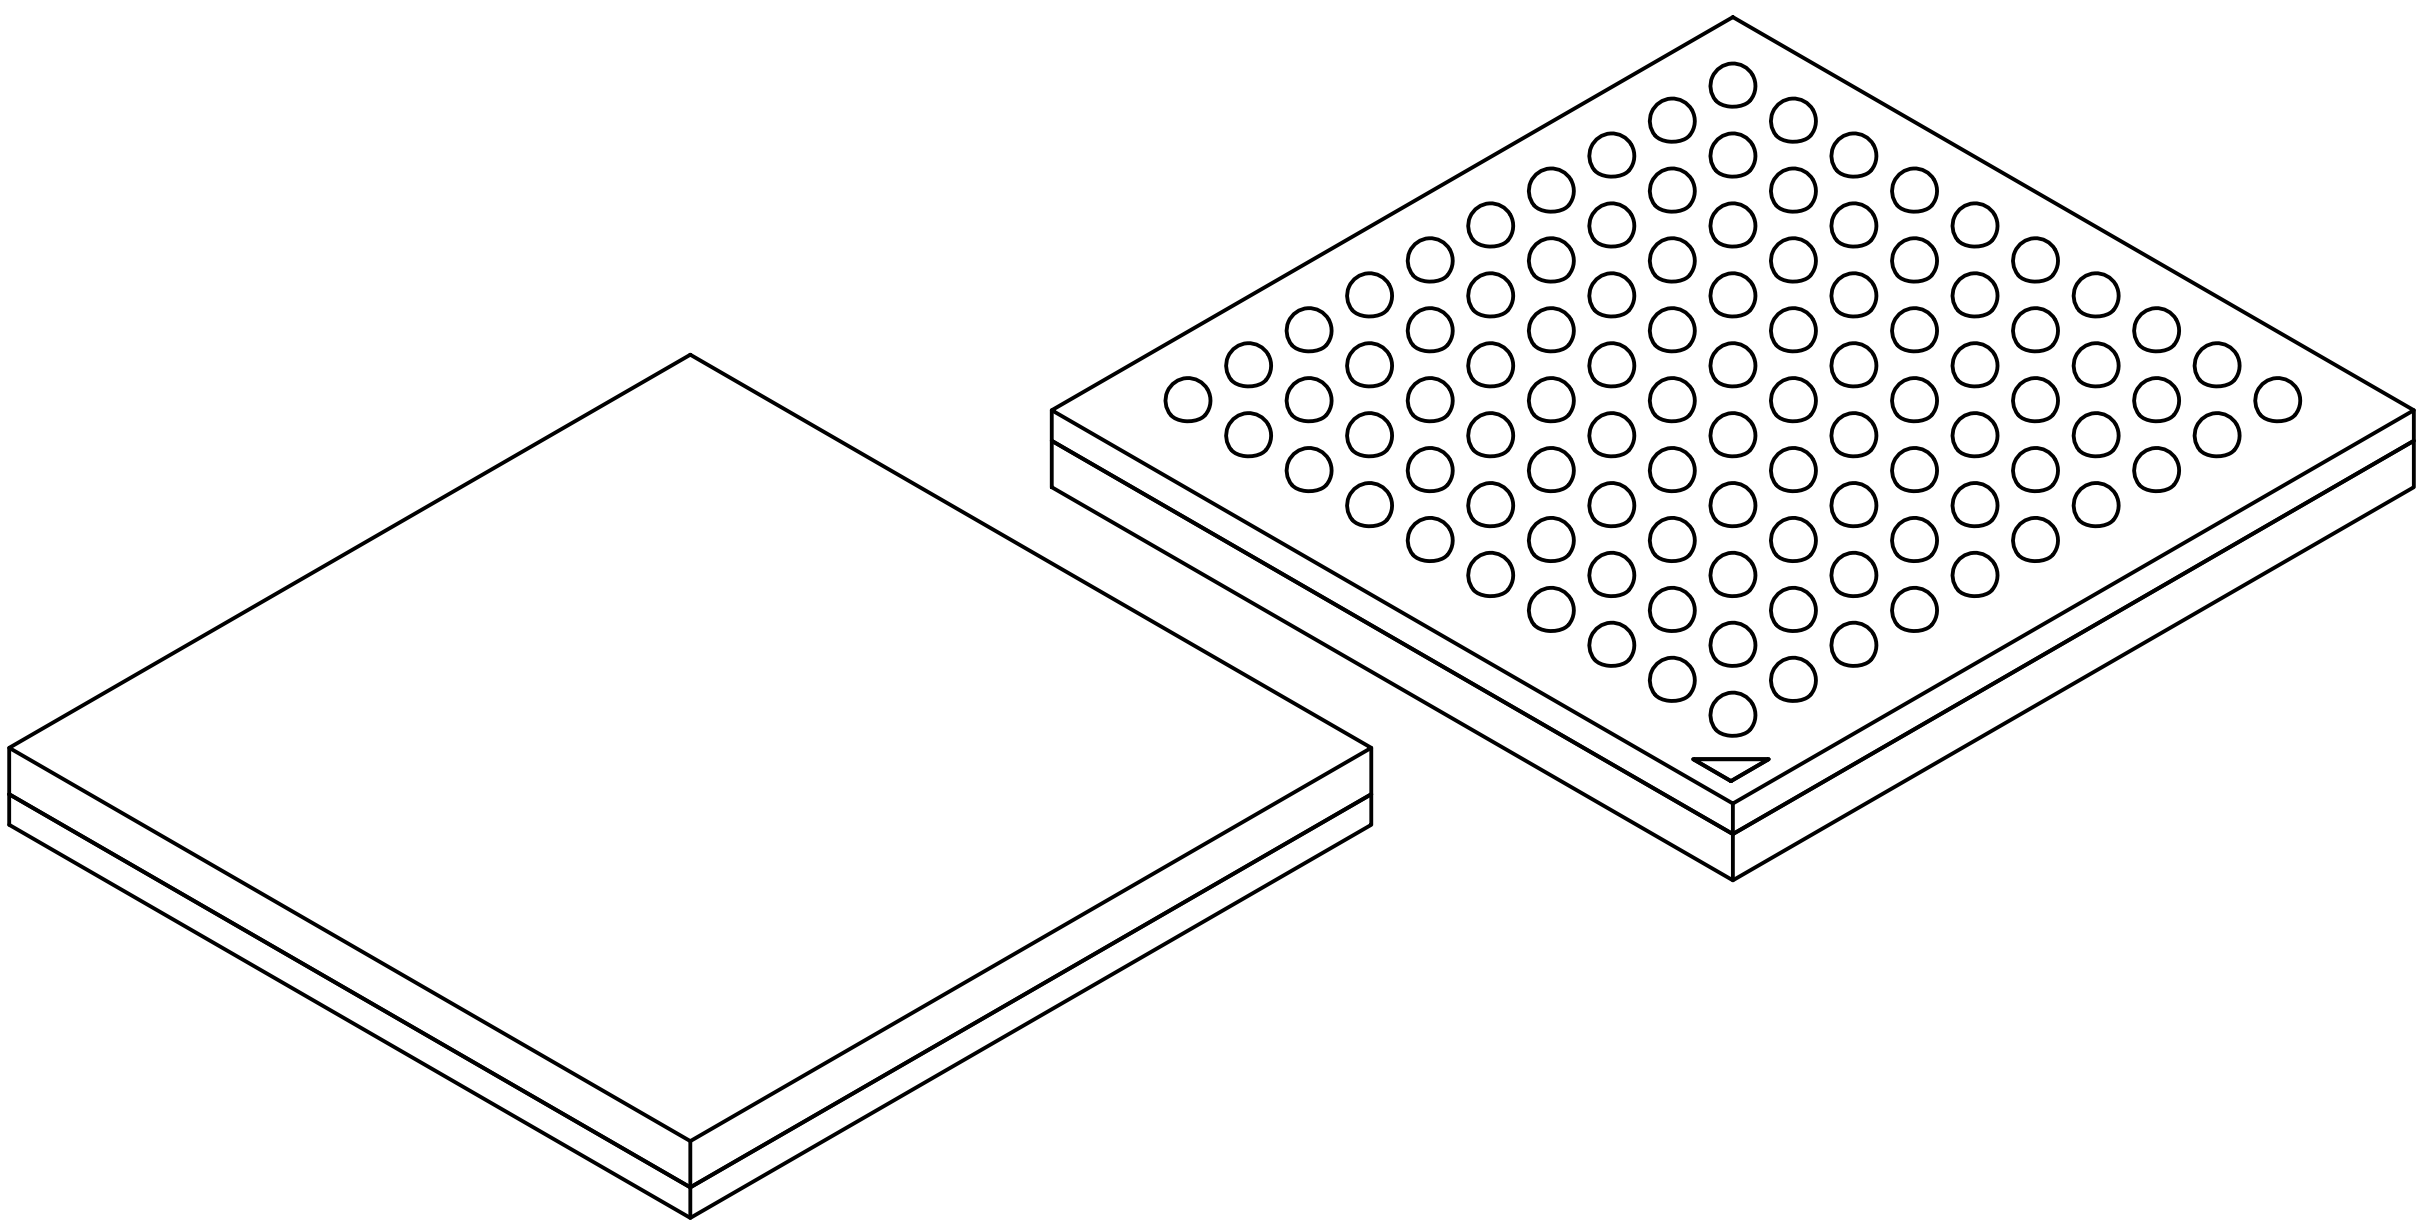

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		100	
Pitch	e		0.80 BSC	
Overall Height	A	–	–	1.20
Ball Height	A1	0.22	–	–
Mold Thickness	M		0.53 REF	
Overall Length	D		9.00 BSC	
Ball Array Length	D2		7.20 BSC	
Overall Width	E		9.00 BSC	
Ball Array Width	E2		7.20 BSC	
Ball Diameter	b	0.37	0.42	0.47

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
   REF: Reference Dimension, usually without tolerance, is for information purposes only.

Microchip Technology Drawing C04-00691 Rev A Sheet 2 of 2

Land Pattern

100-Ball Thin-Profile Fine-Pitch Ball Grid Array - (9UW) 9x9x1.2mm [TFBGA]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

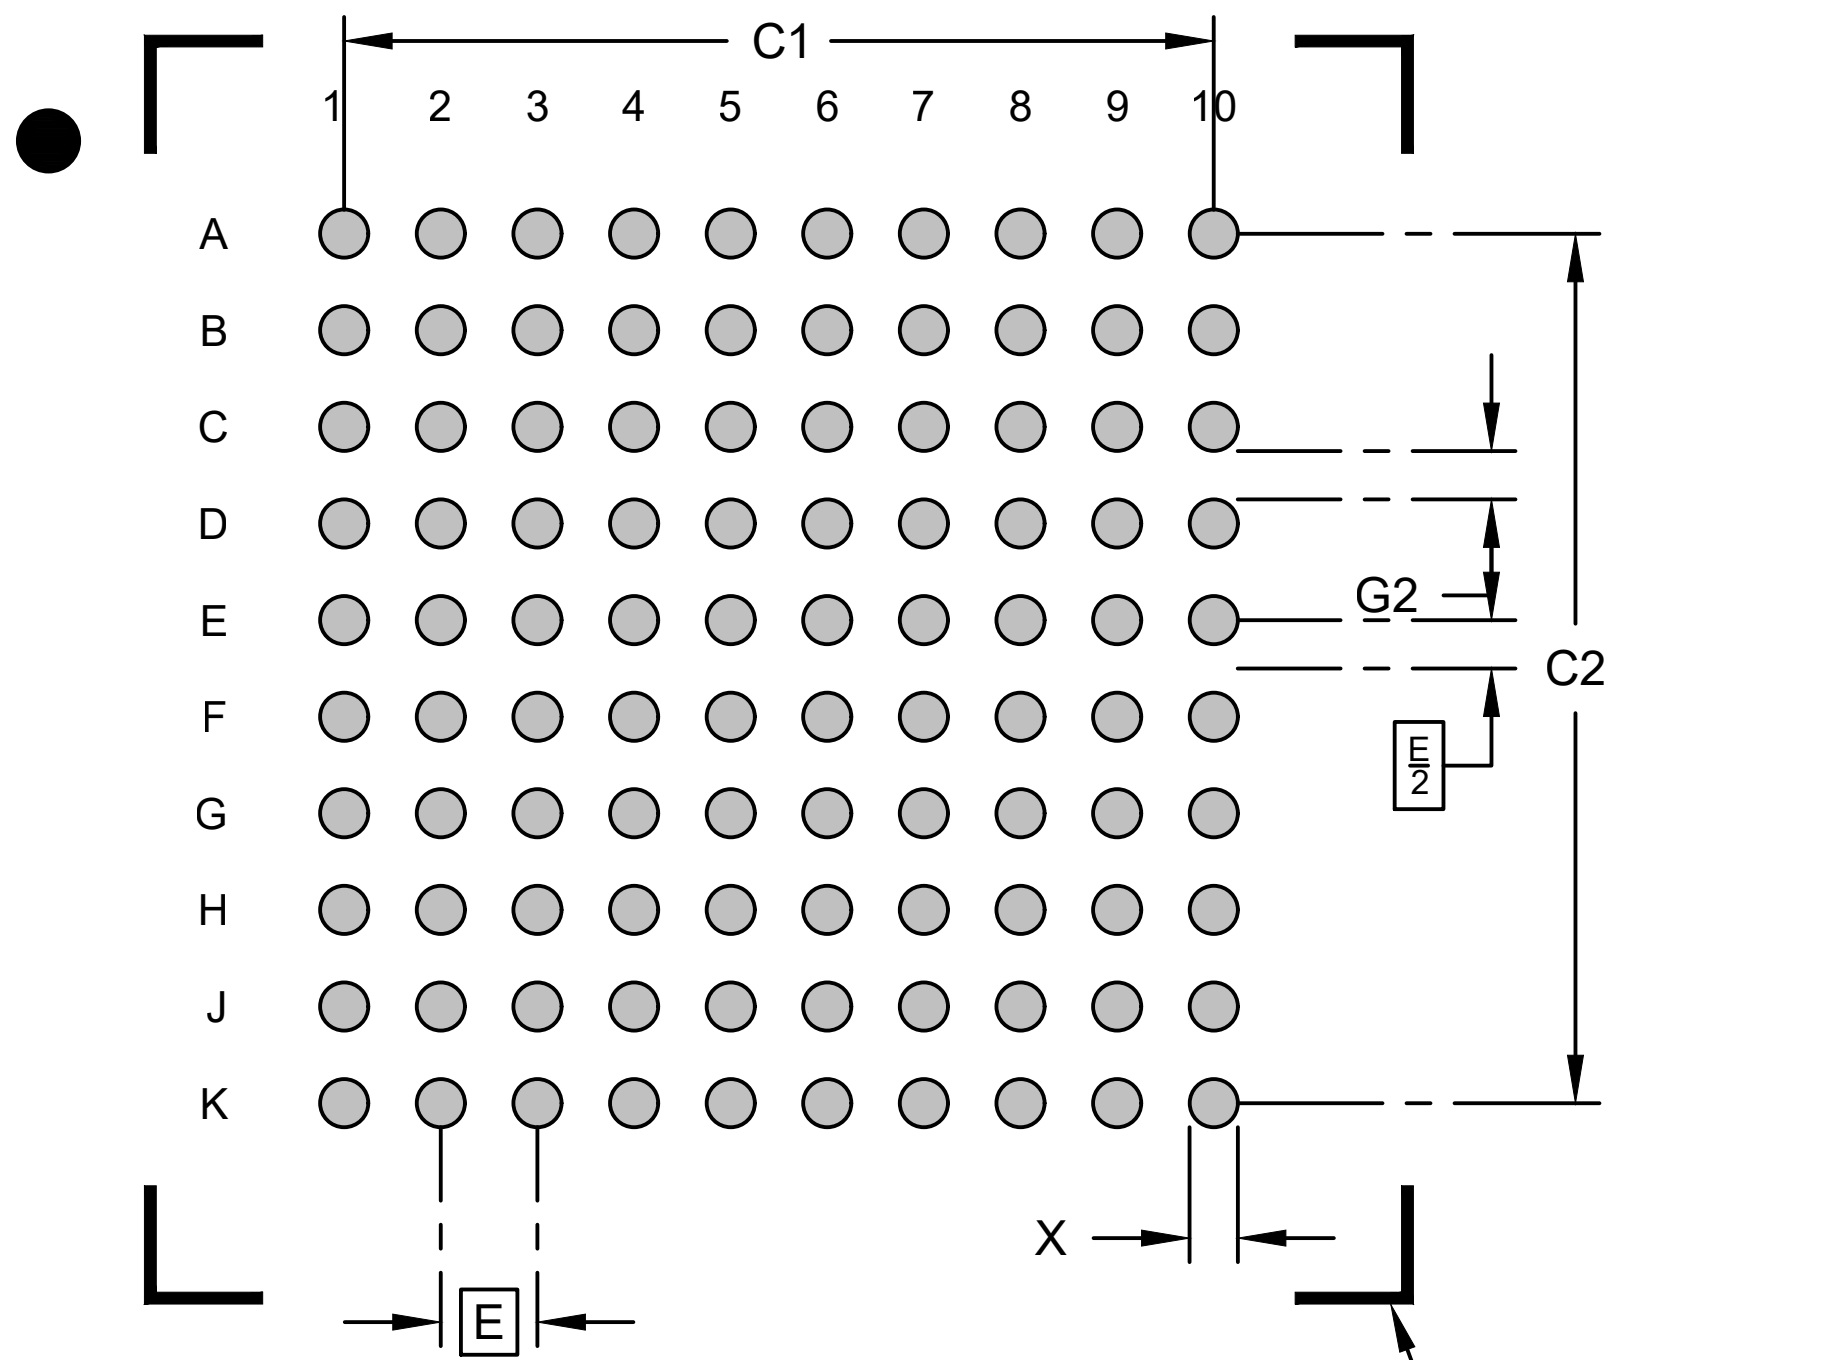

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		7.20	
Contact Pad Spacing	C2		7.20	
Contact Pad Diameter (X100)	X			0.40
Contact Pad to Contact Pad	G2	0.40		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
2. For best soldering results, please refer to the current industry standard IPC-7093.

Microchip Technology Drawing C04-02691 Rev A