11-Lead Very Thin Plastic Dual Flat, No Lead Package (K4A) - 6x5 mm Body [VDFN] With Dual Fused Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

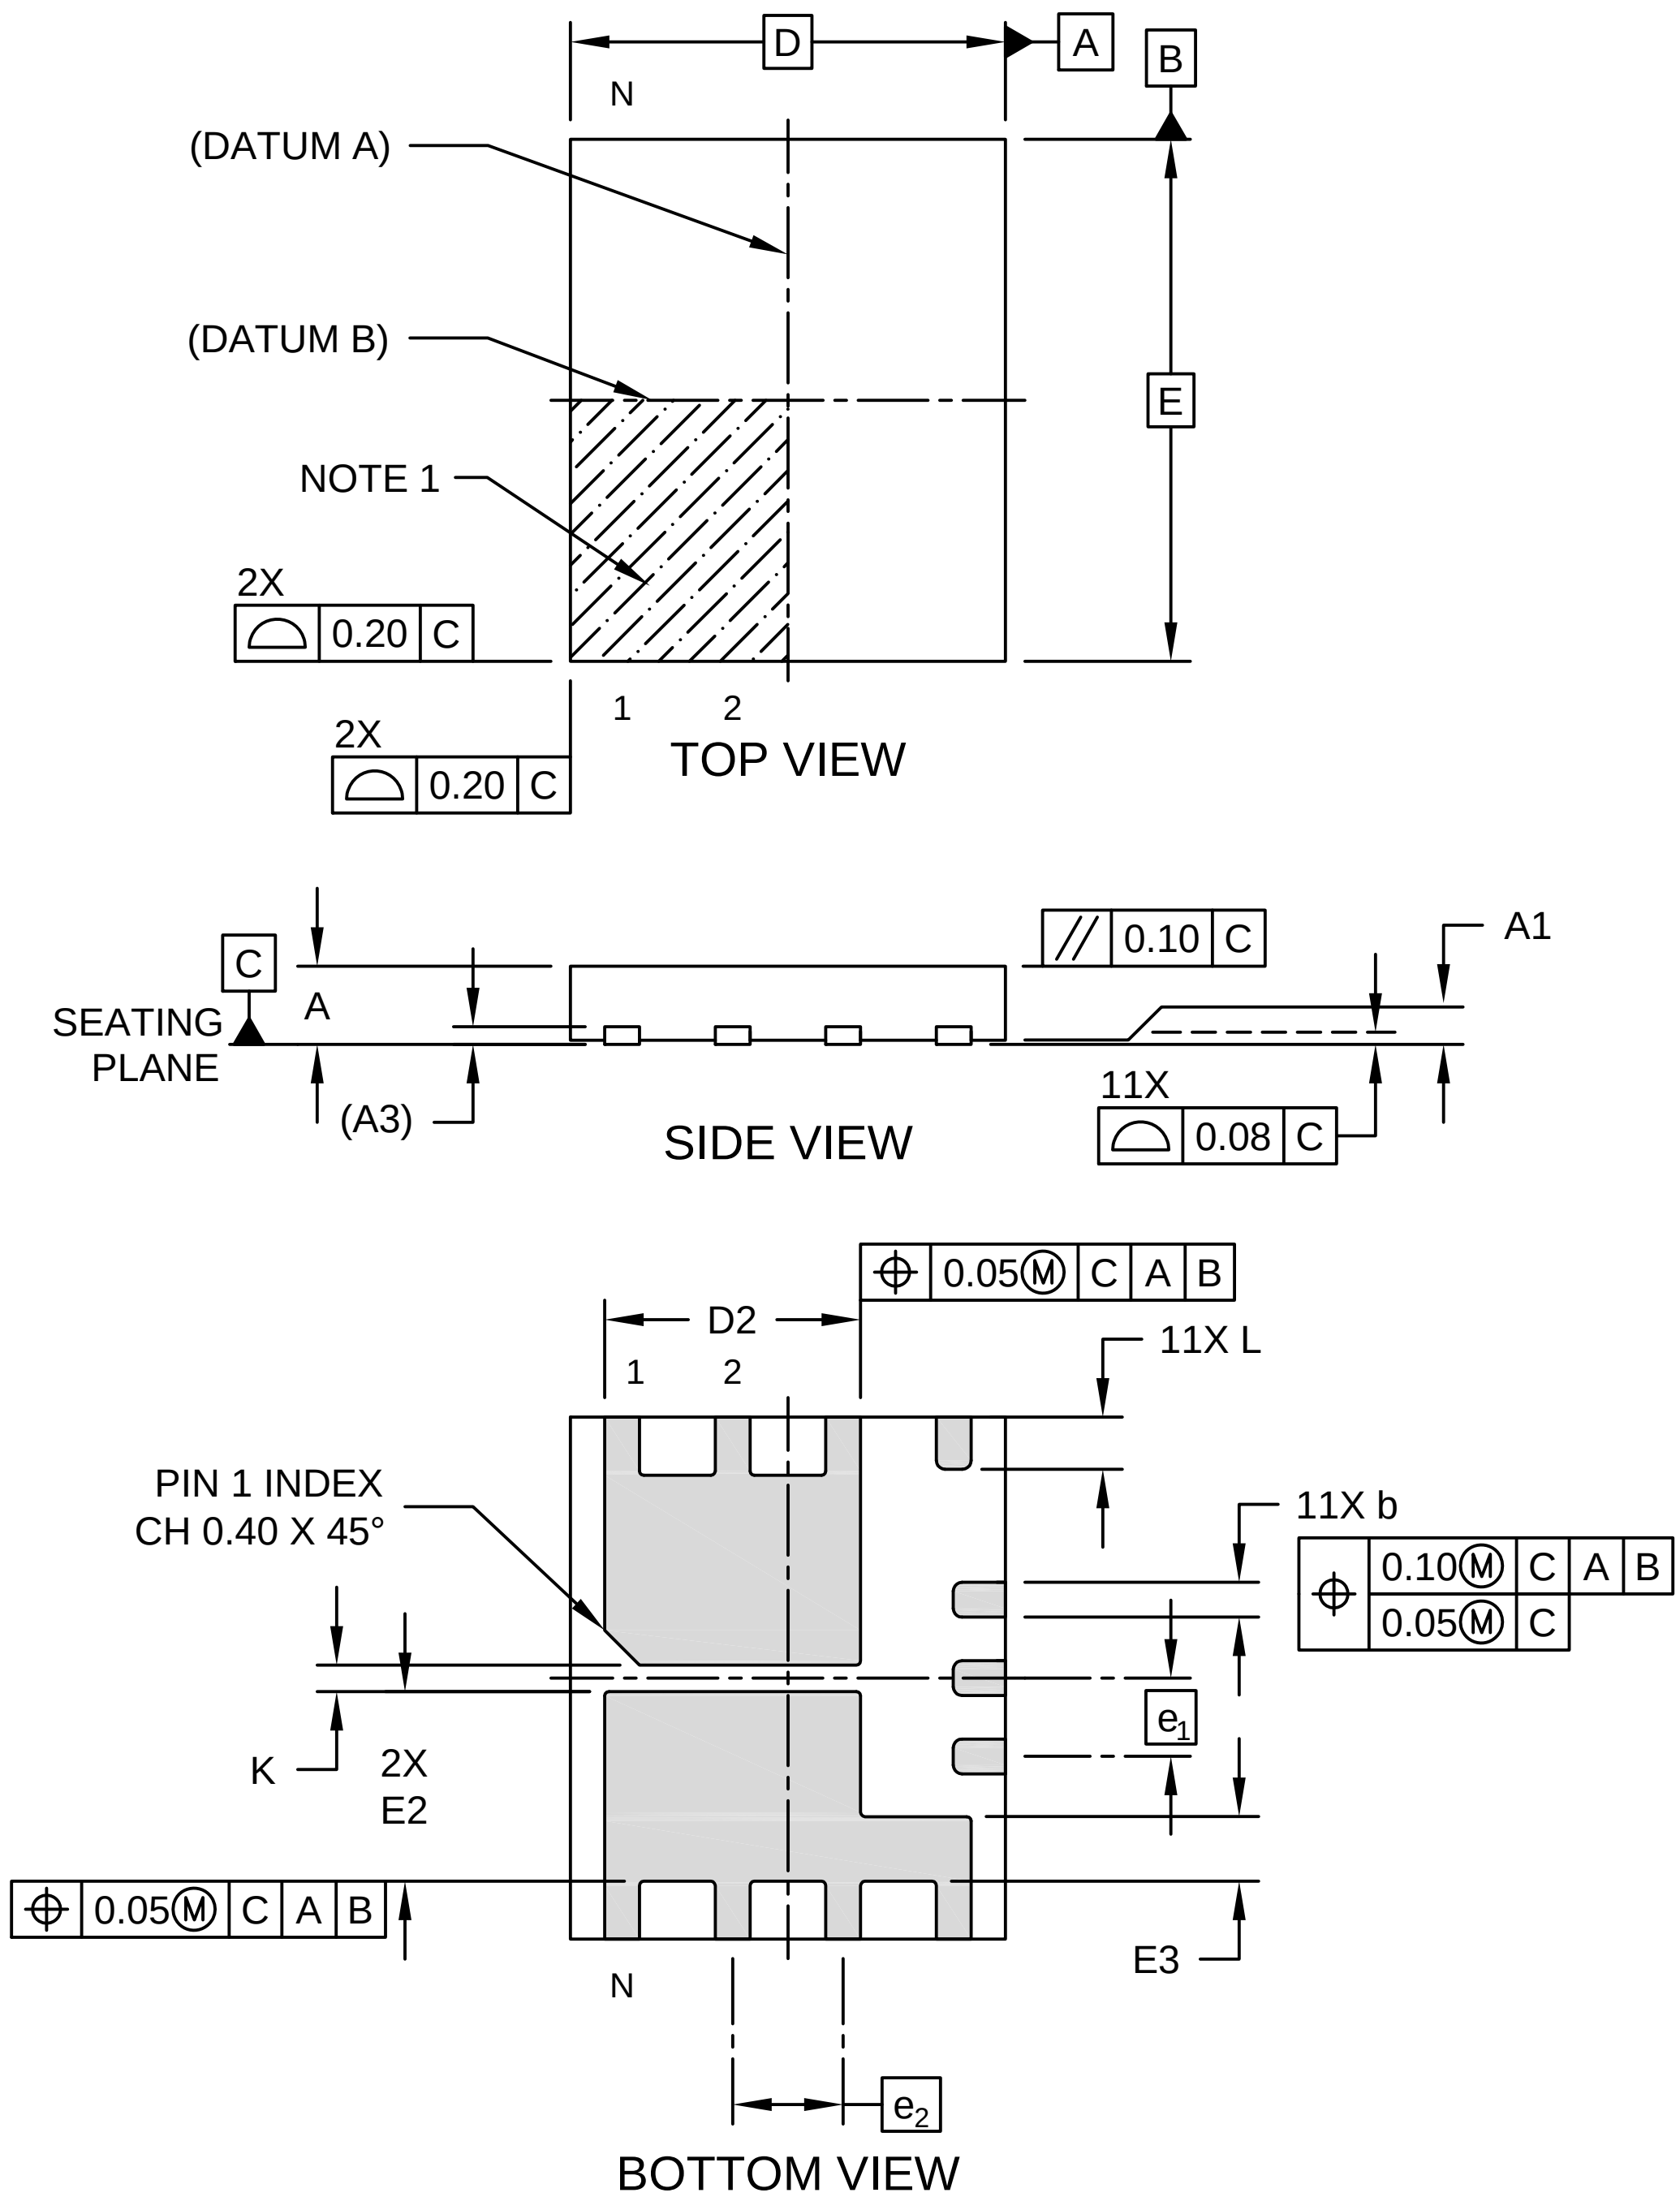

11-Lead Very Thin Plastic Dual Flat, No Lead Package (K4A) - 6x5 mm Body [VDFN] With Dual Fused Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

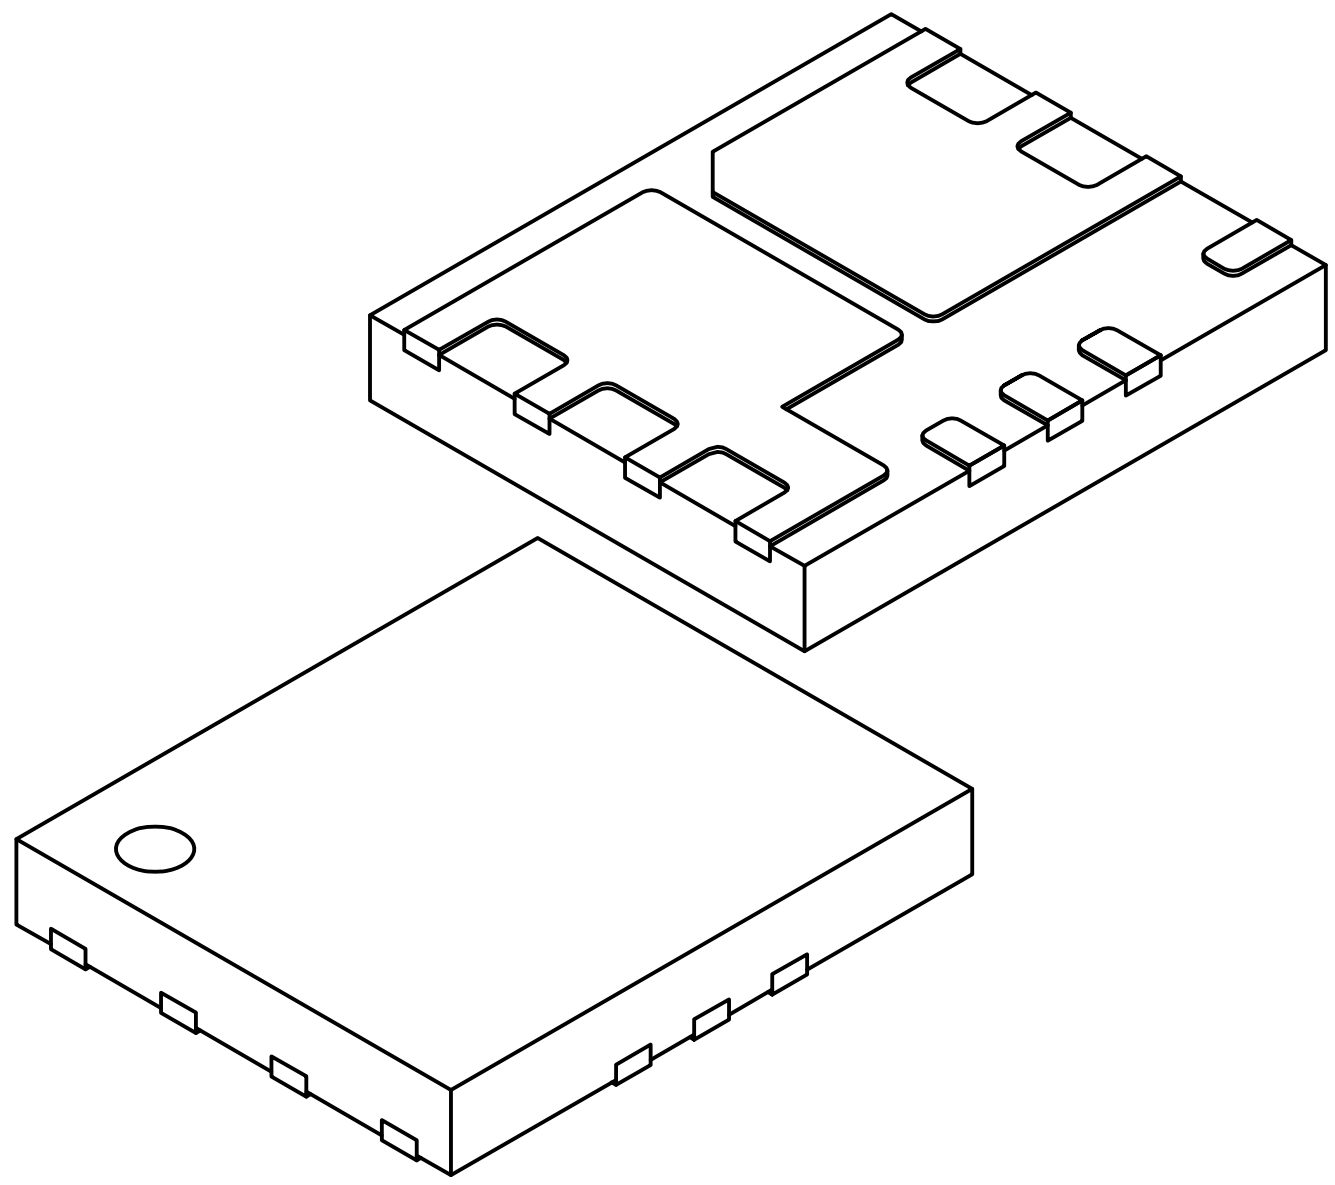

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		11	
Pitch	e_1		0.90 BSC	
Pitch	e_2		1.27 BSC	
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF	
Overall Length	D		5.00 BSC	
Exposed Pad Length	D2	2.89	2.94	2.99
Overall Width	E		6.00 BSC	
Exposed Pad Width	E2	2.13	2.18	2.23
Exposed Pad Width	E3	0.69	0.74	0.79
Terminal Width	b	0.35	0.40	0.50
Terminal Length	L	0.55	0.60	0.65
Spacing Between Exposed Pads	K	0.20	-	-

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

11-Lead Very Thin Plastic Dual Flat, No Lead Package (K4A) - 6x5 mm Body [VDFN] With Dual Fused Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

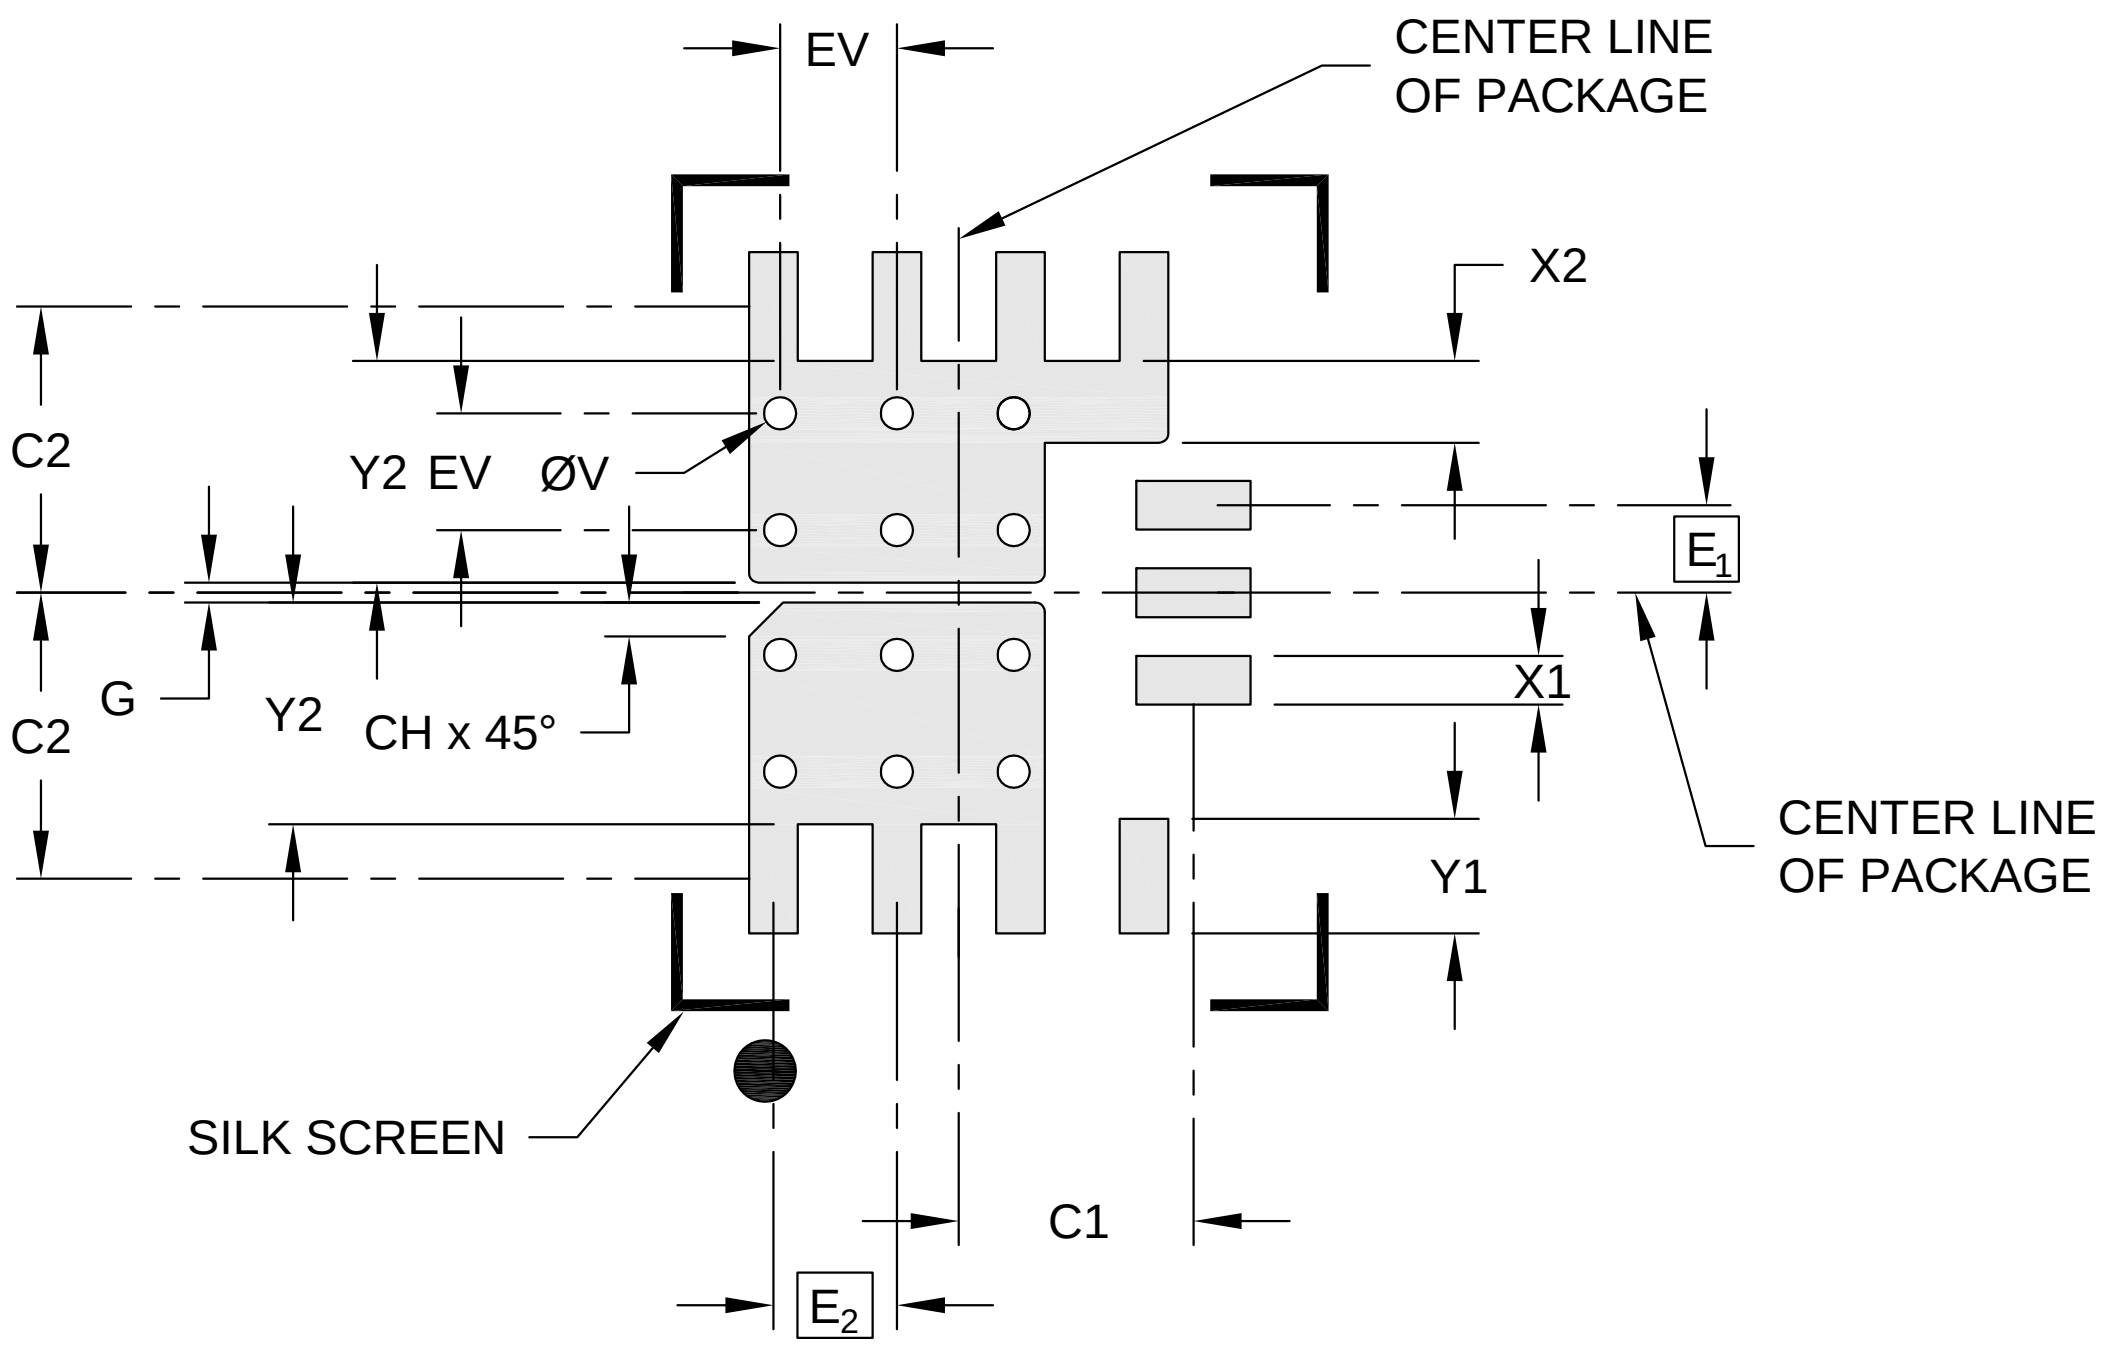

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E_1		0.90 BSC	
Contact Pitch	E_2		1.27 BSC	
Contact Pad Width (X11)	X1			0.50
Center Pad Width	X2			0.84
Contact Pad Length (X11)	Y1			0.80
Center Pad Length	Y2			2.28
Package Center to Contact Center	C1		2.41	
Package Center to Contact Center	C2		2.94	
Center Pad Chamfer	CH		0.35	
Spacing Between Exposed Pads	G	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3197A