8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (NJX) - 3x3x0.65 mm Body [UDFN] With Multiple Exposed Pads and Dimpled Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

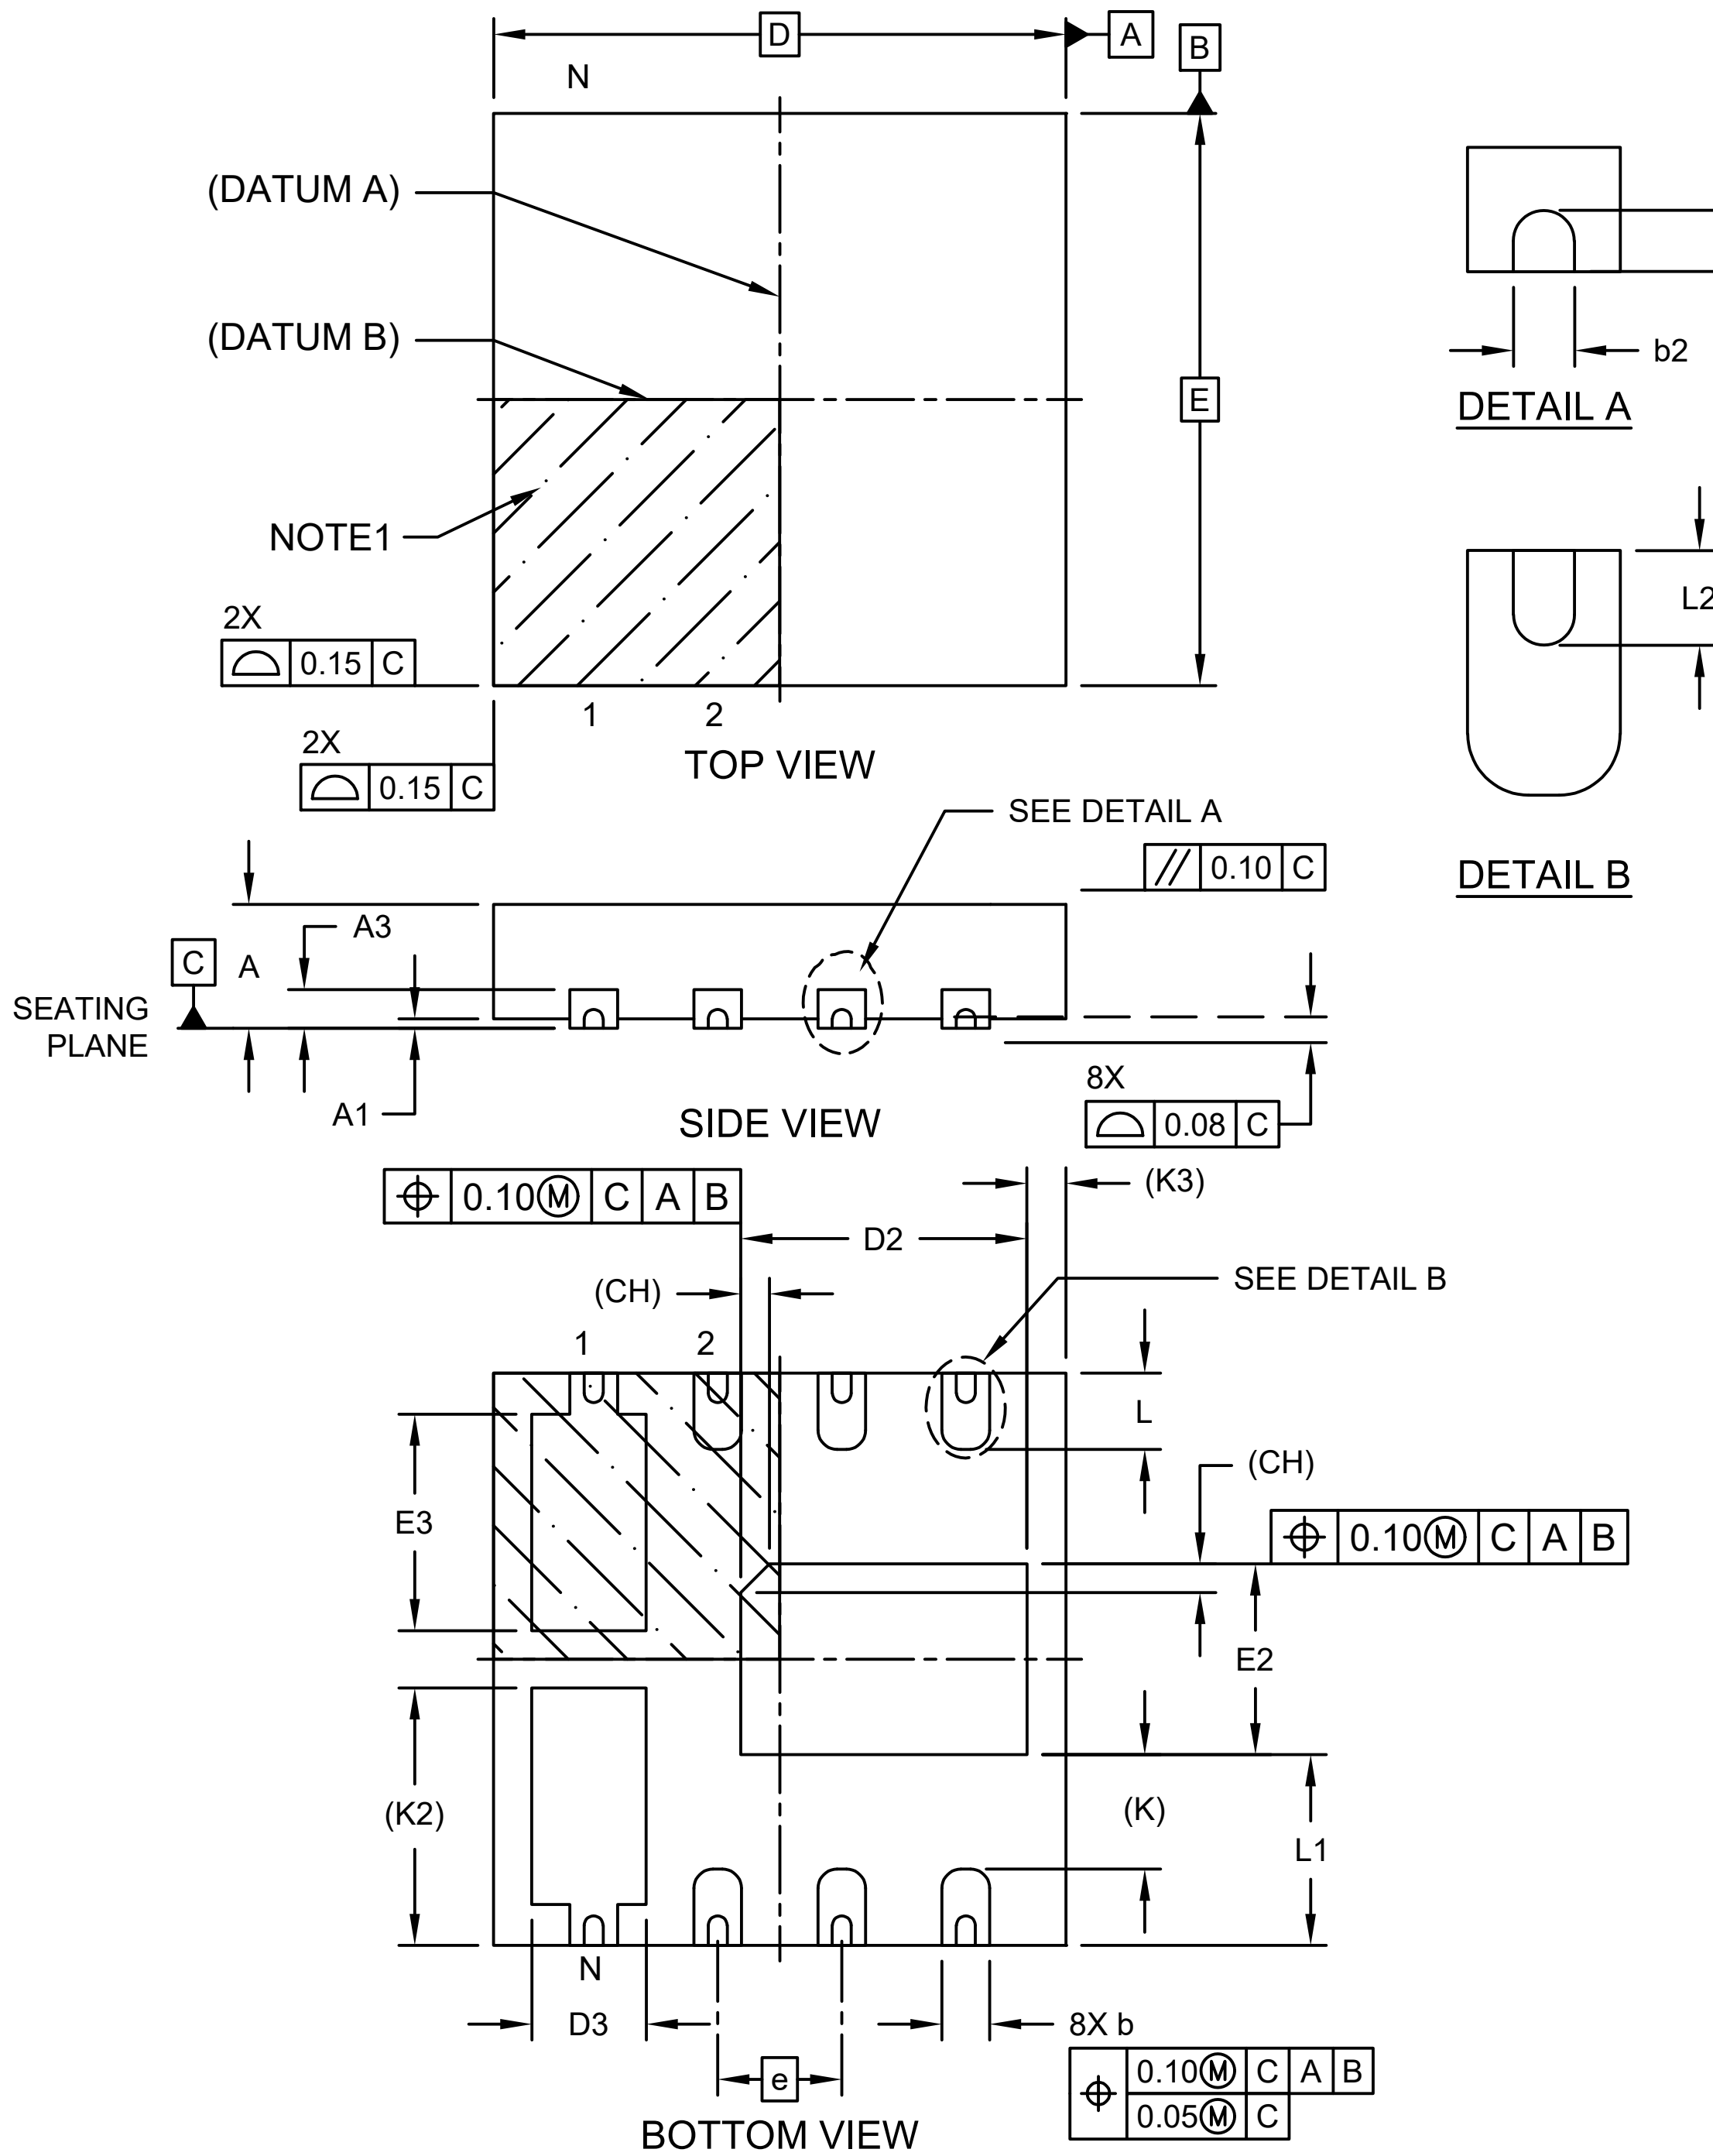

Microchip Technology Drawing C04-00519 Rev A Sheet 1 of 2

8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (NJX) - 3x3x0.65 mm Body [UDFN] With Multiple Exposed Pads and Dimpled Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

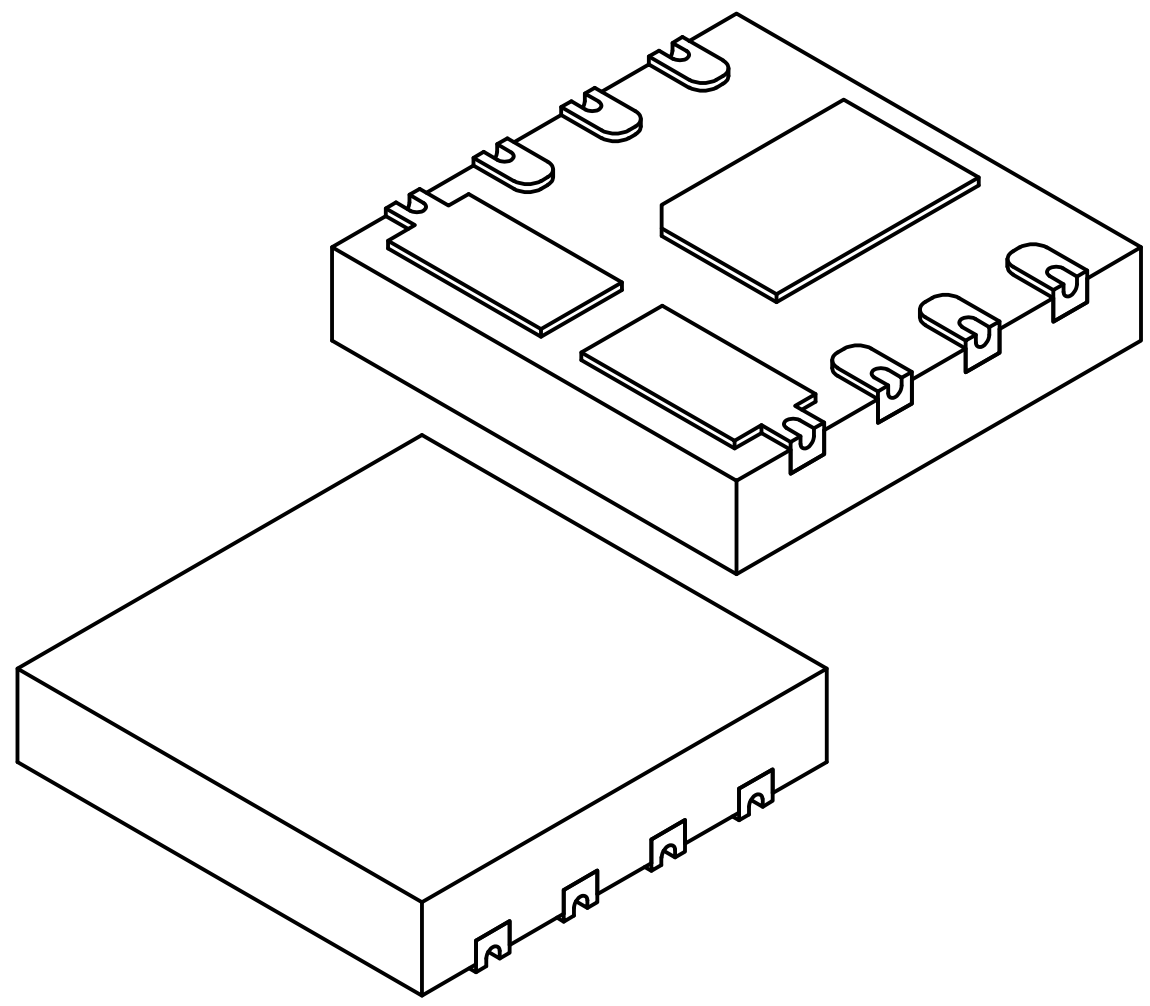

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N		8	
Pitch	e		0.65 BSC	
Overall Height	A	–	–	0.65
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF	
Overall Length	D		3.00 BSC	
Exposed Pad Length	D2	1.40	1.50	1.60
Exposed Pad Length (X2)	D3	0.50	0.60	0.70
Overall Width	E		3.00 BSC	
Exposed Pad Width	E2	0.90	1.00	1.10
Exposed Pad Width (X2)	E3	1.035	1.135	1.235
Index Chamfer	CH		0.15 REF	
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K		0.60 REF	
Edge-Plus-Exposed-Pad-Width (X2)	K2		1.35 REF	
Edge-to-Exposed-Pad	K3		0.20 REF	
Edge-to-Exposed-Pad-Edge	L1	1.475	1.55	1.625
Wettable Flank Dimple Height	A4	0.045	–	–
Dimple Width	b2	0.05	0.10	0.15

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00519 Rev A Sheet 2 of 2

8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (NJX) - 3x3x0.65 mm Body [UDFN] With Multiple Exposed Pads and Dimpled Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

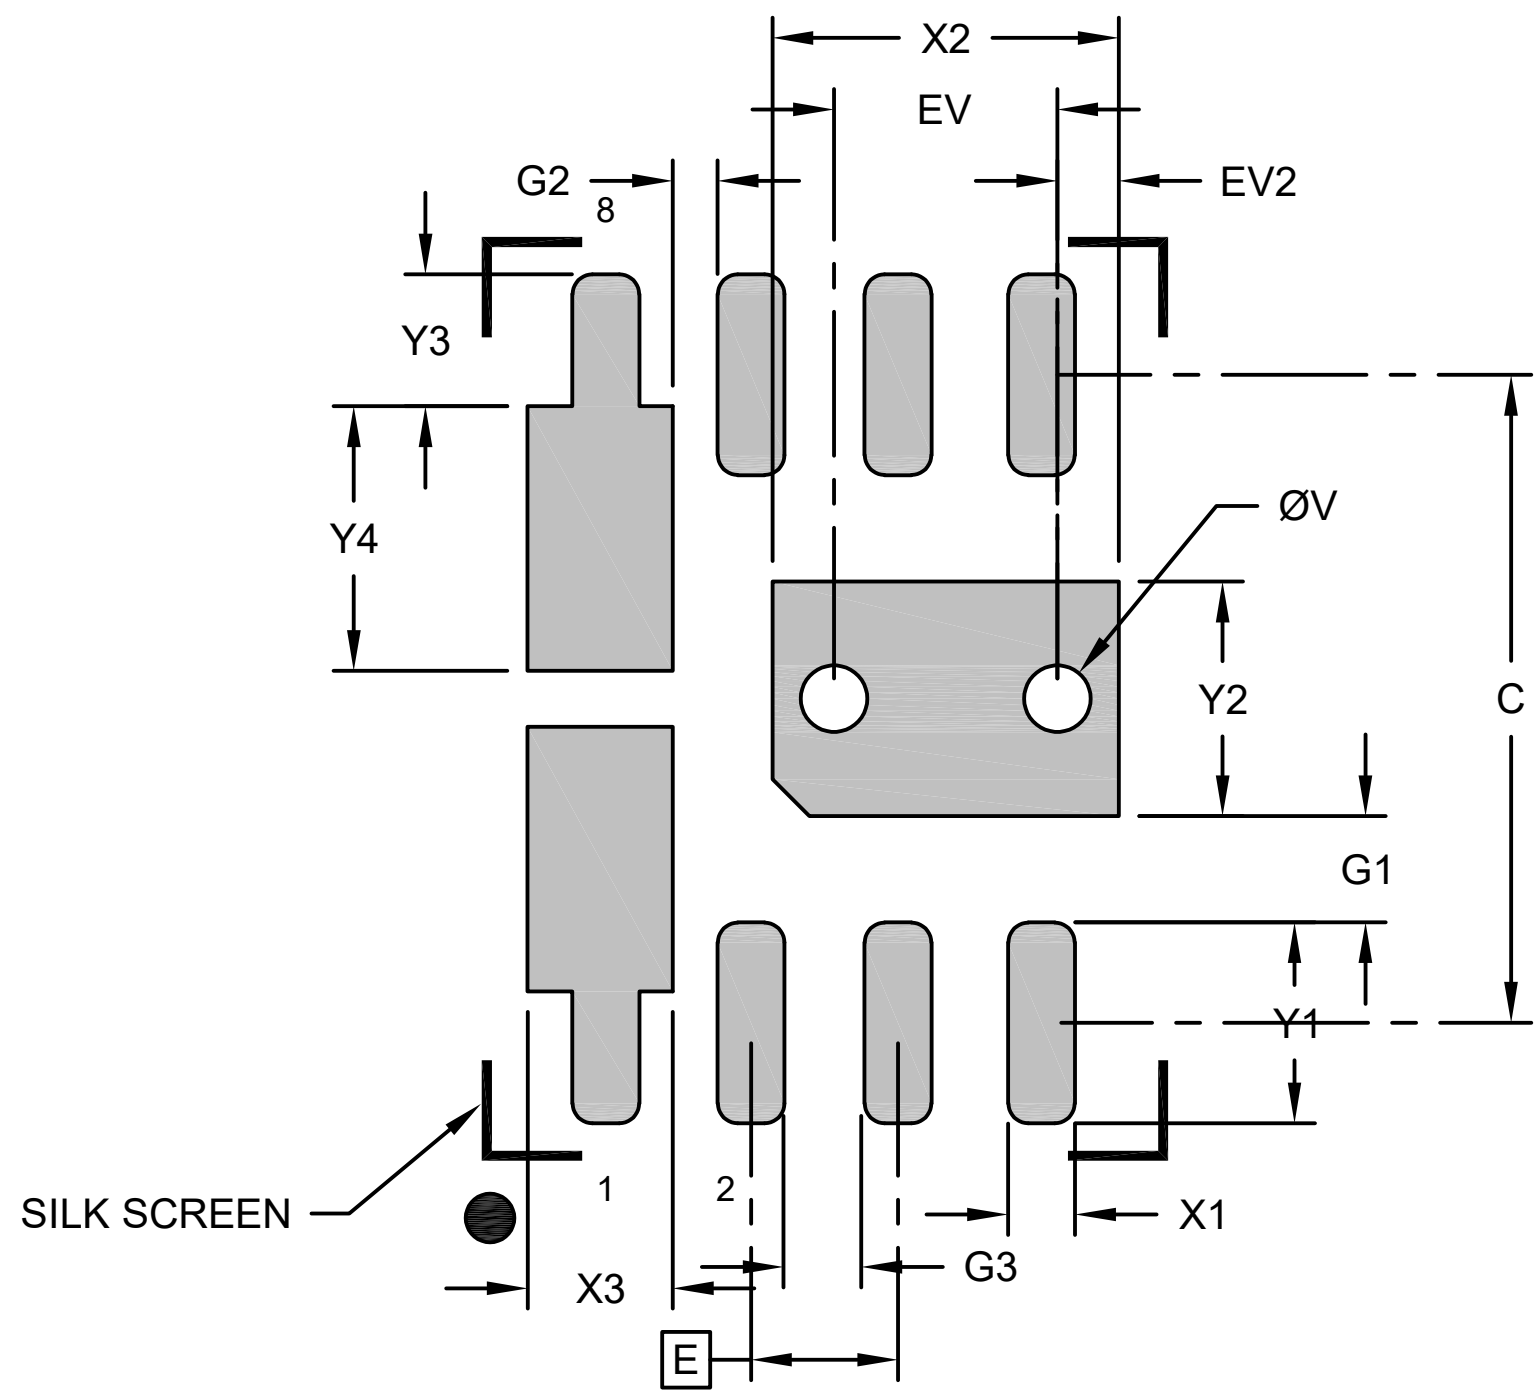

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Center Pad Width	X2			1.55
Center Pad Length	Y2			1.05
Contact Pad Spacing	C		2.90	
Contact Pad Width (X8)	X1			0.30
Contact Pad Width (X8)	X3			0.65
Contact Pad Length (X6)	Y1			0.90
Contact Pad Length (X2)	Y3			0.59
Contact Pad Length (X2)	Y4			1.19
Contact Pad to Center Pad (X6)	G1	0.48		
Contact Pad to Contact Pad (X2)	G2	0.20		
Contact Pad to Contact Pad (X4)	G3	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	
Thermal Via Offset	EV2		0.27	

Notes:
1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2519 Rev A