19-Lead Very Thin Plastic Quad Flat, No Lead Package (Q8A) - 3x3x0.9 mm Body [VQFN] With Dual Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

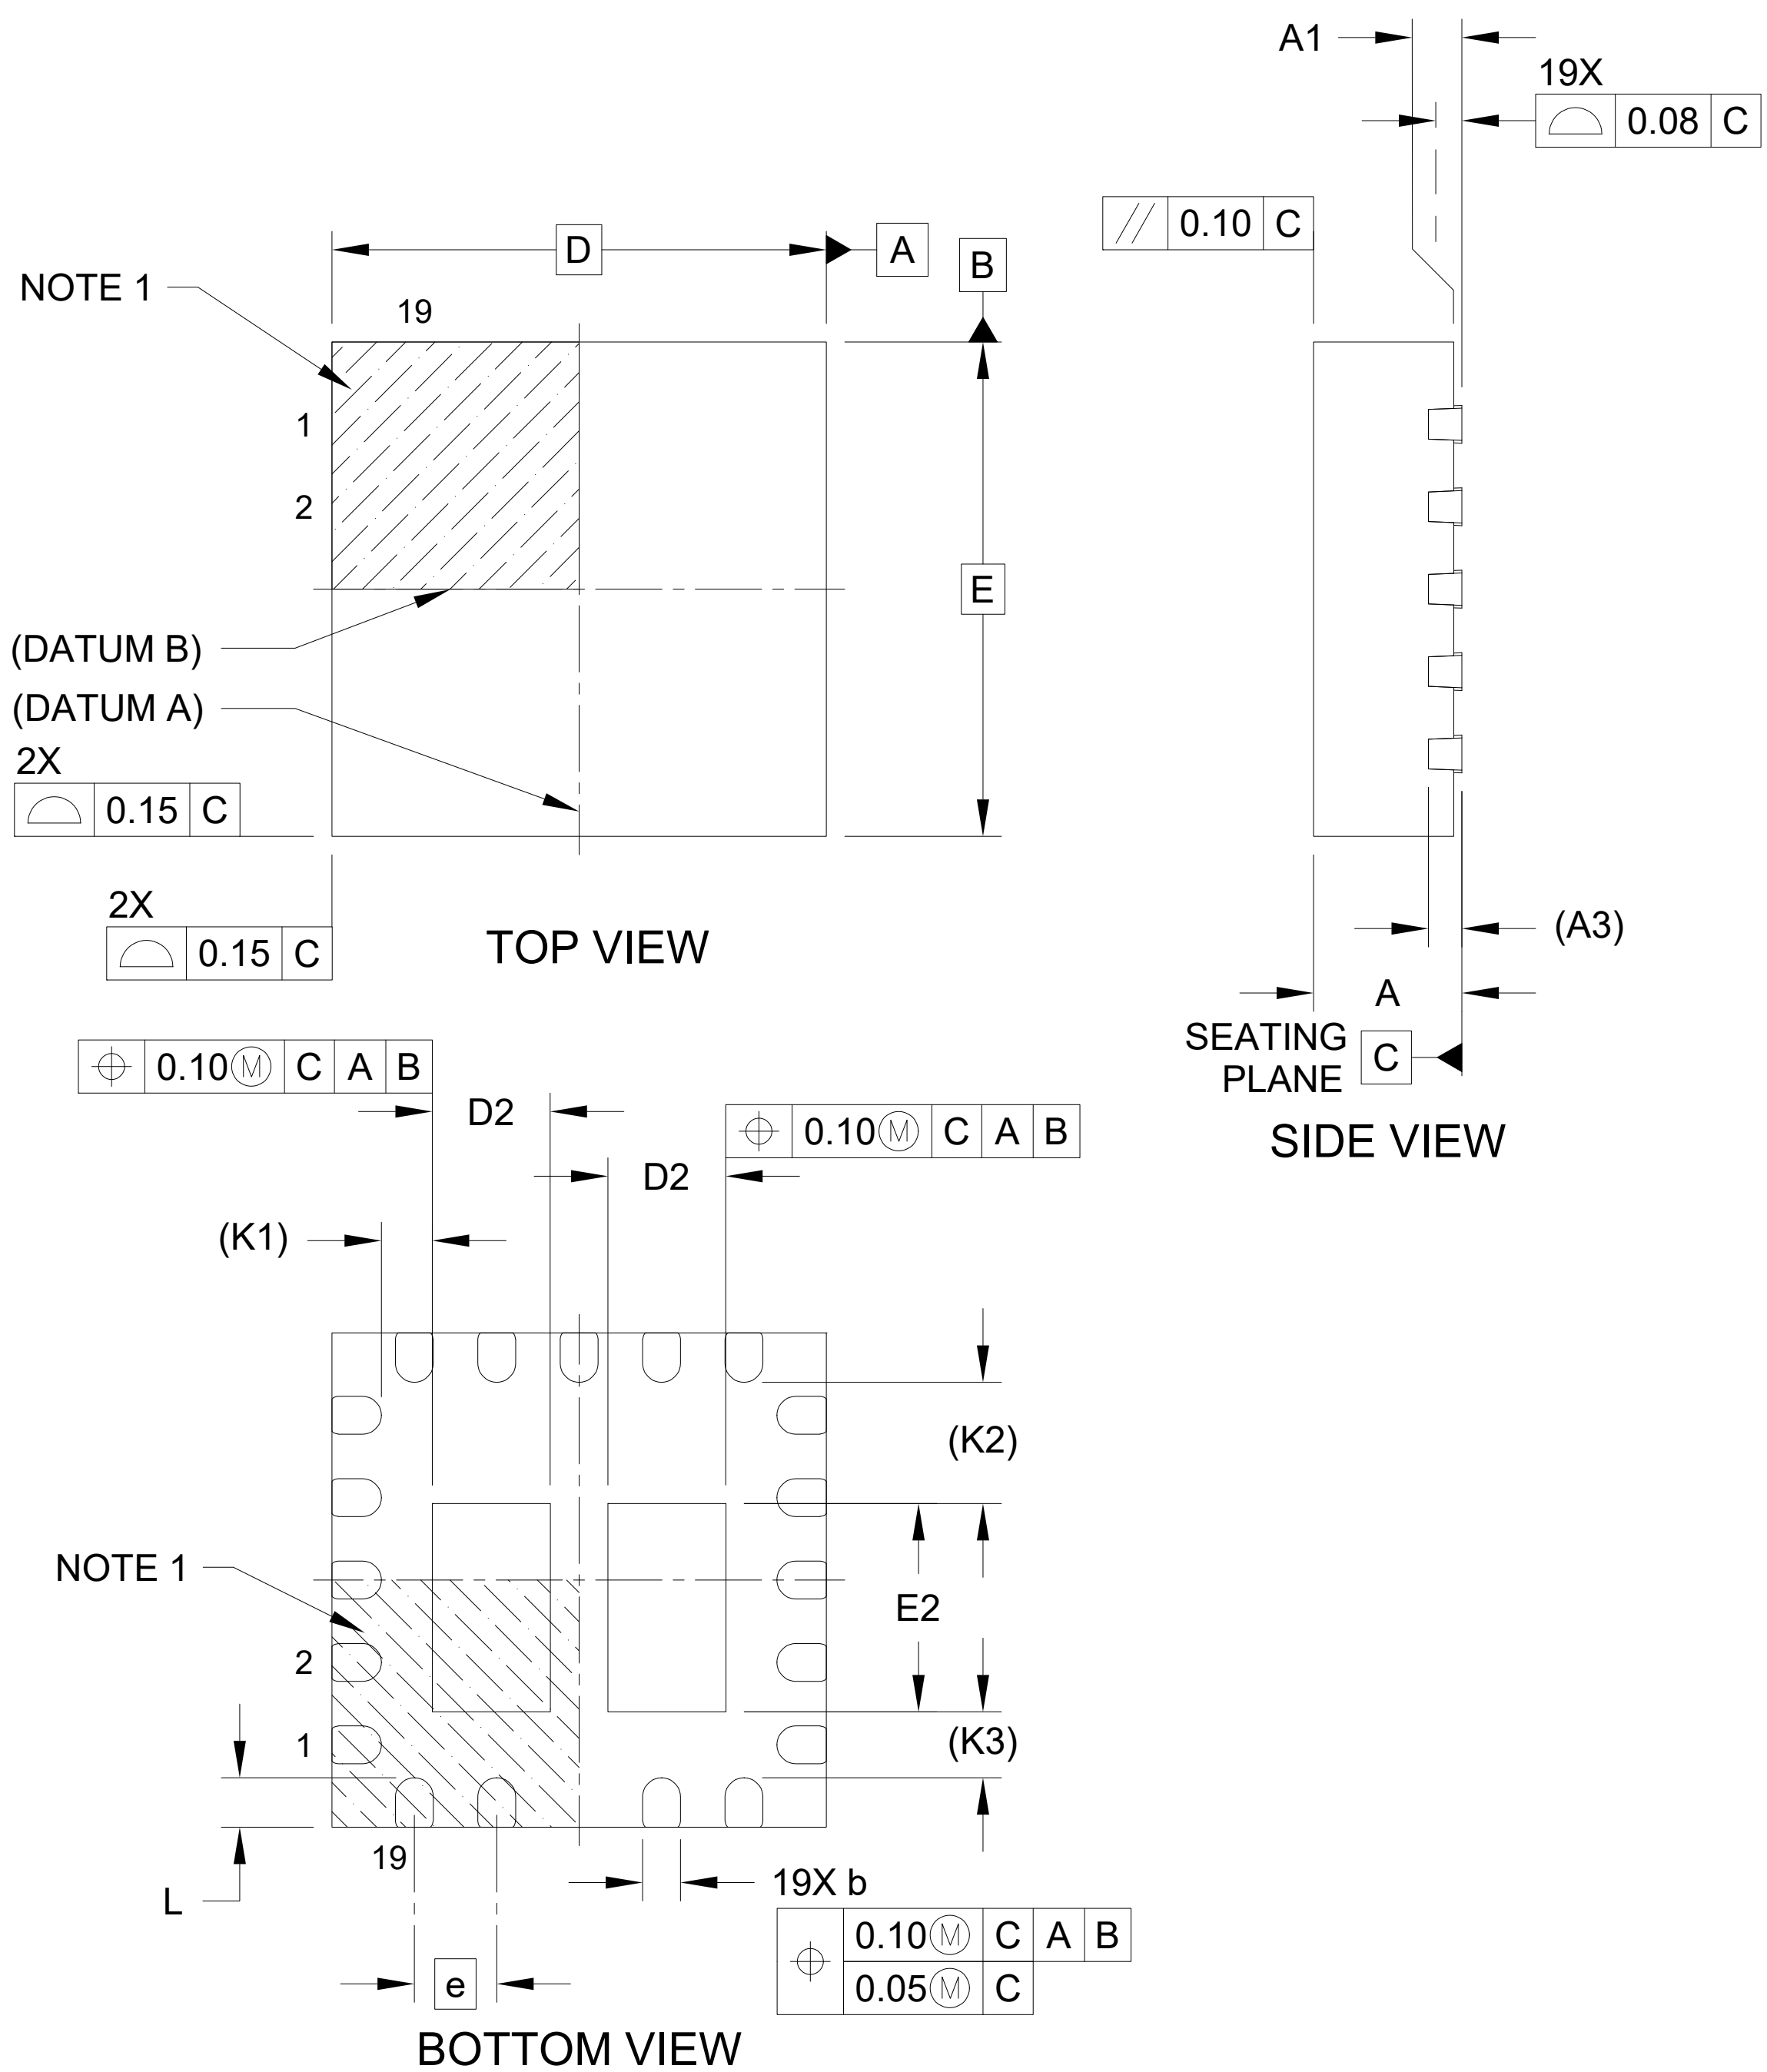

Microchip Technology Drawing C04-1273 Rev B Sheet 1 of 2

19-Lead Very Thin Plastic Quad Flat, No Lead Package (Q8A) - 3x3x0.9 mm Body [VQFN] With Dual Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

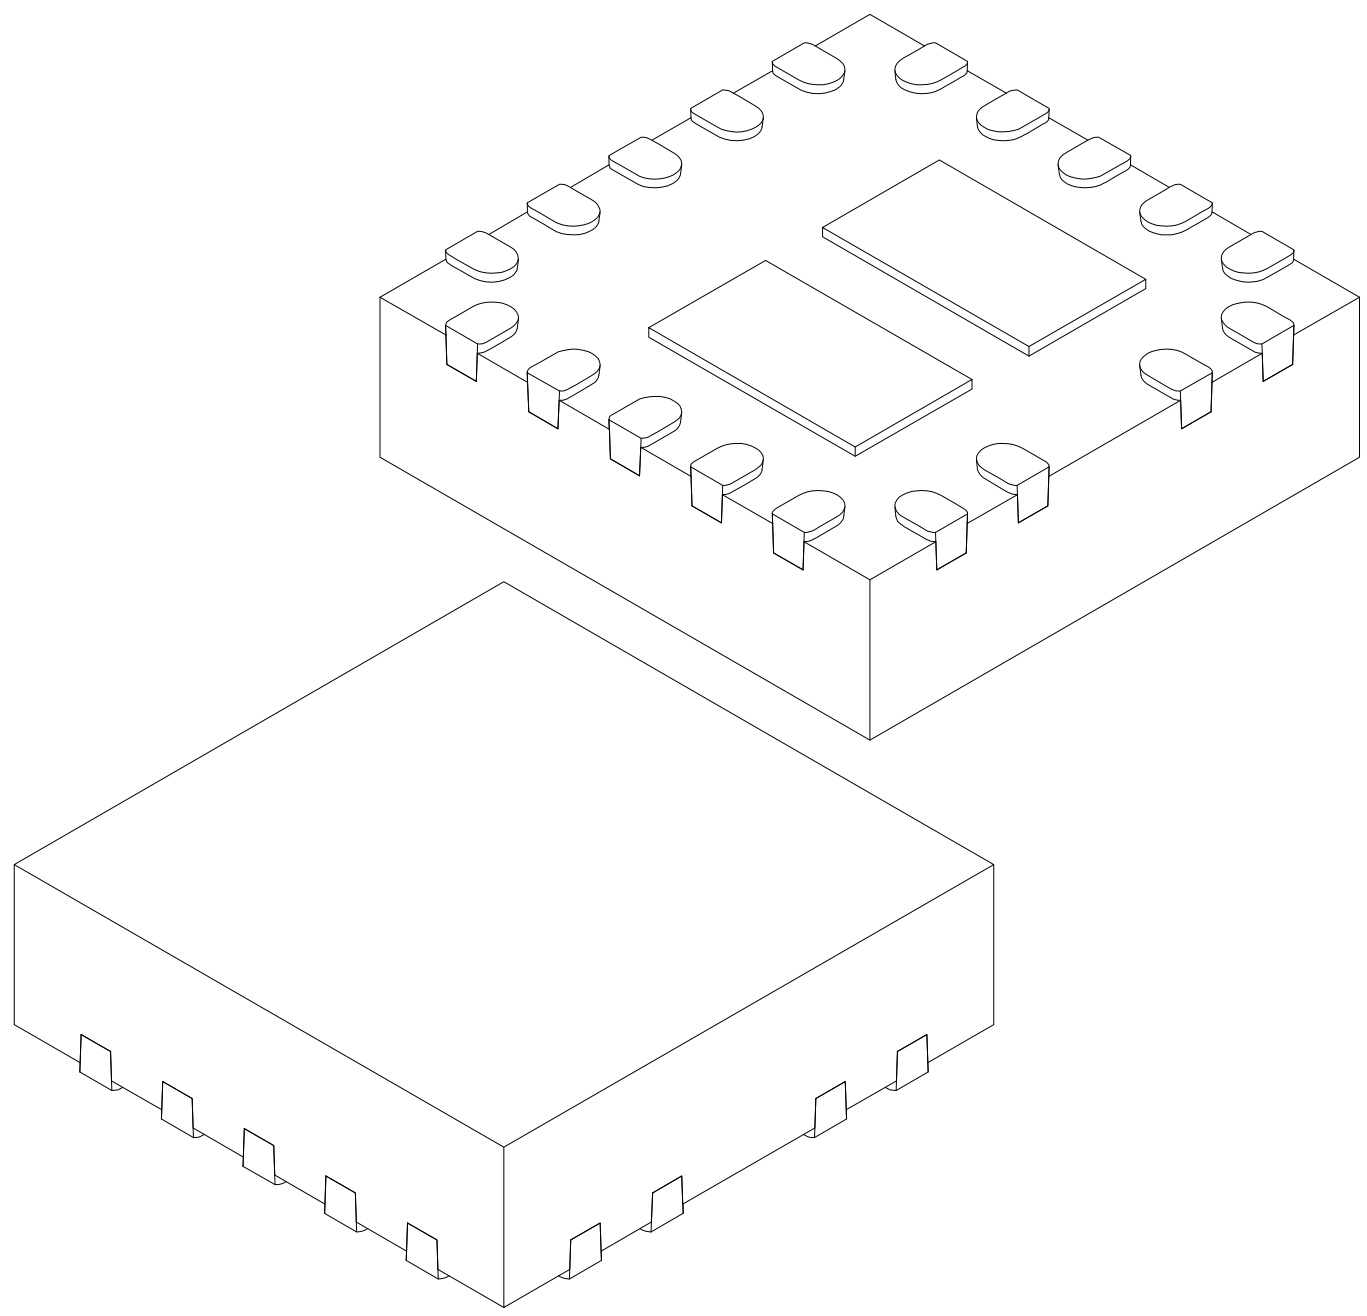

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		19	
Pitch	e		0.50 BSC	
Overall Height	A	-	-	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF	
Overall Length	D		3.00 BSC	
Exposed Pad Length	D2	0.615	0.715	0.815
Overall Width	E		3.00 BSC	
Exposed Pad Width	E2	1.165	1.265	1.365
Terminal Width	b	0.18	0.23	0.35
Terminal Length	L	0.20	0.30	0.40
Terminal-to-Exposed-Pad	K1		0.31 REF	
Terminal-to-Exposed-Pad	K2		0.74 REF	
Terminal-to-Exposed-Pad	K3		0.40 REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1273 Rev B Sheet 2 of 2

19-Lead Very Thin Plastic Quad Flat, No Lead Package (Q8A) - 3x3x0.9 mm Body [VQFN] With Dual Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

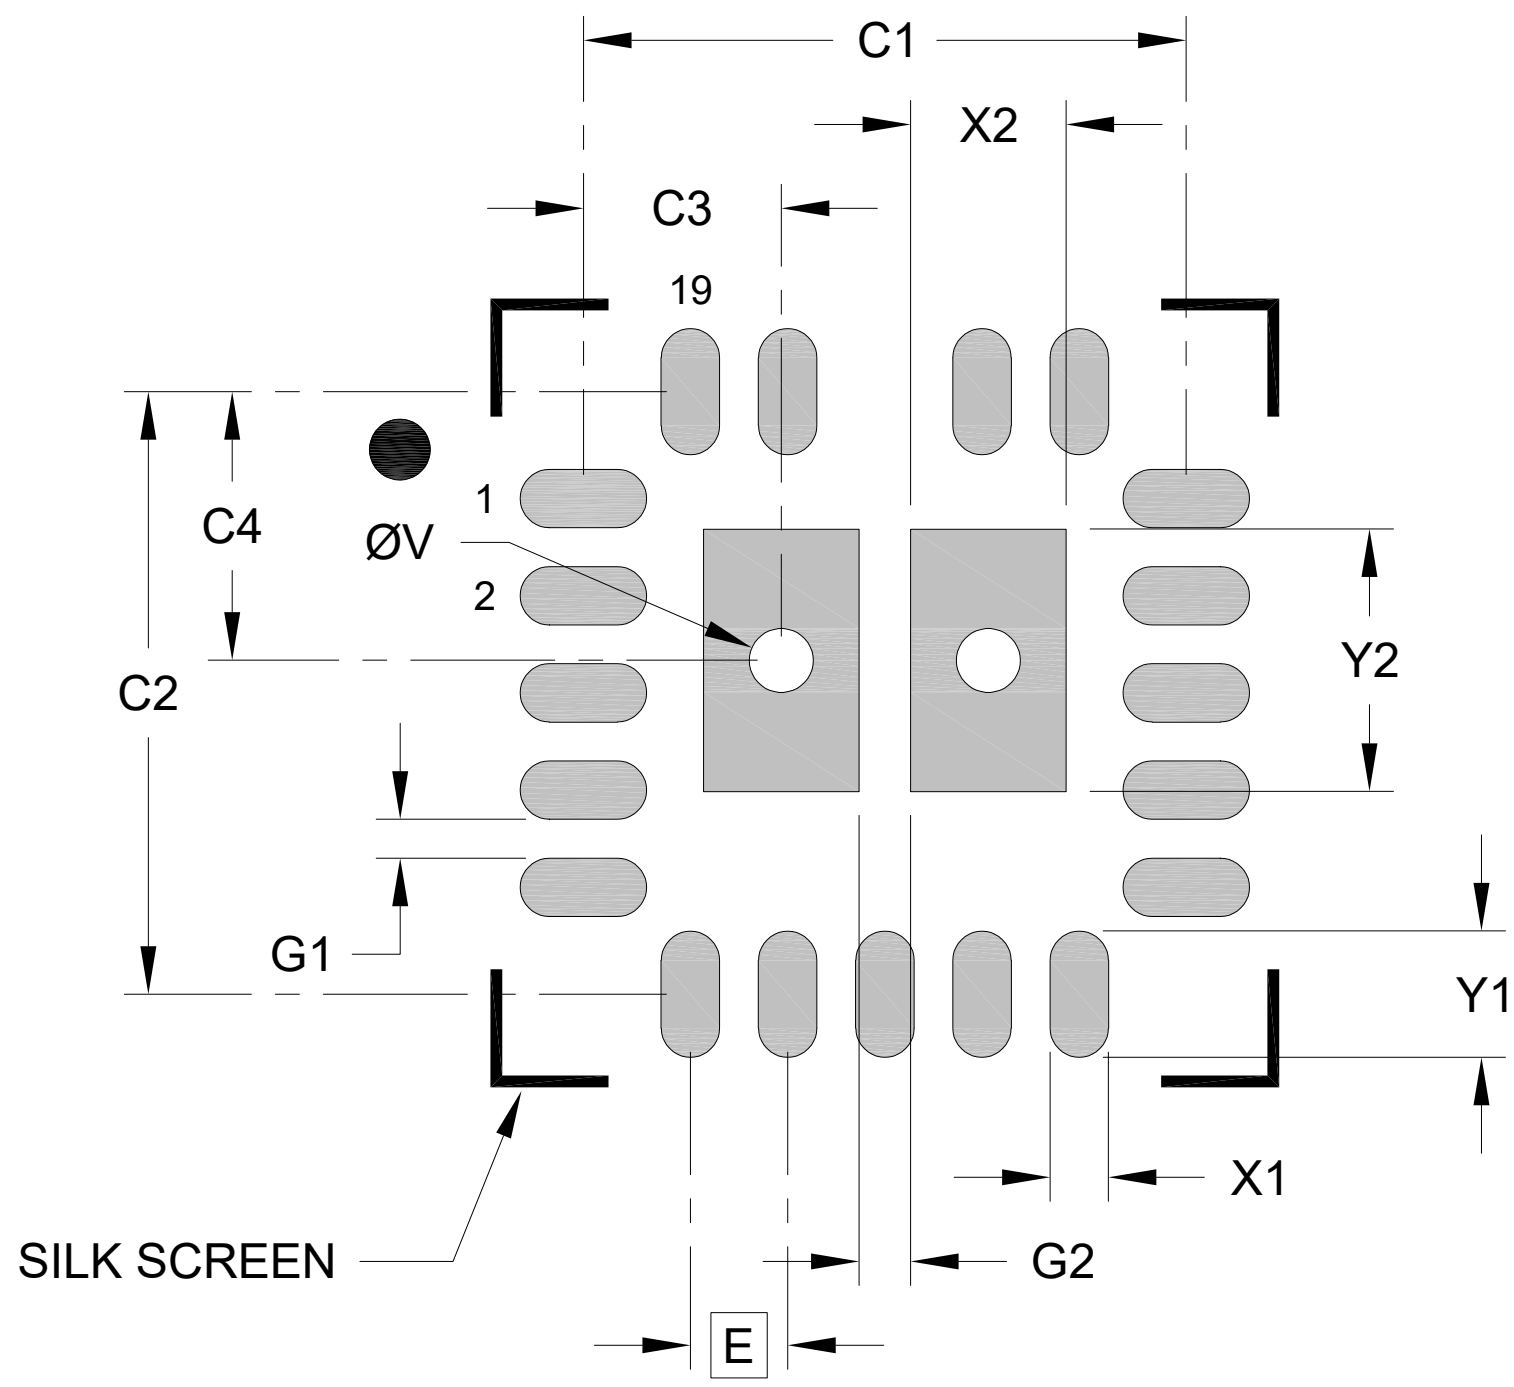

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Center Pad Width	X2			0.80
Center Pad Length	Y2			1.35
Contact Pad Spacing	C1		3.10	
Contact Pad Spacing	C2		3.10	
Contact Pad to Thermal Via (X2)	C3		1.03	
Contact Pad to Thermal Via (X2)	C4		1.38	
Contact Pad Width (X19)	X1			0.30
Contact Pad Length (X19)	Y1			0.65
Contact Pad to Contact Pad (X14)	G1	0.20		
Center Pad to Center Pad	G2	0.27		
Thermal Via Diameter	V		0.33	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias should be filled or tented to avoid solder loss during reflow process.

Microchip Technology Drawing C04-3273 Rev B

19-Lead Very Thin Plastic Quad Flat, No Lead Package (Q8A) - 3x3x0.9 mm Body [VQFN] With Dual Exposed Pads; For UCS32xx Load Switch Products

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

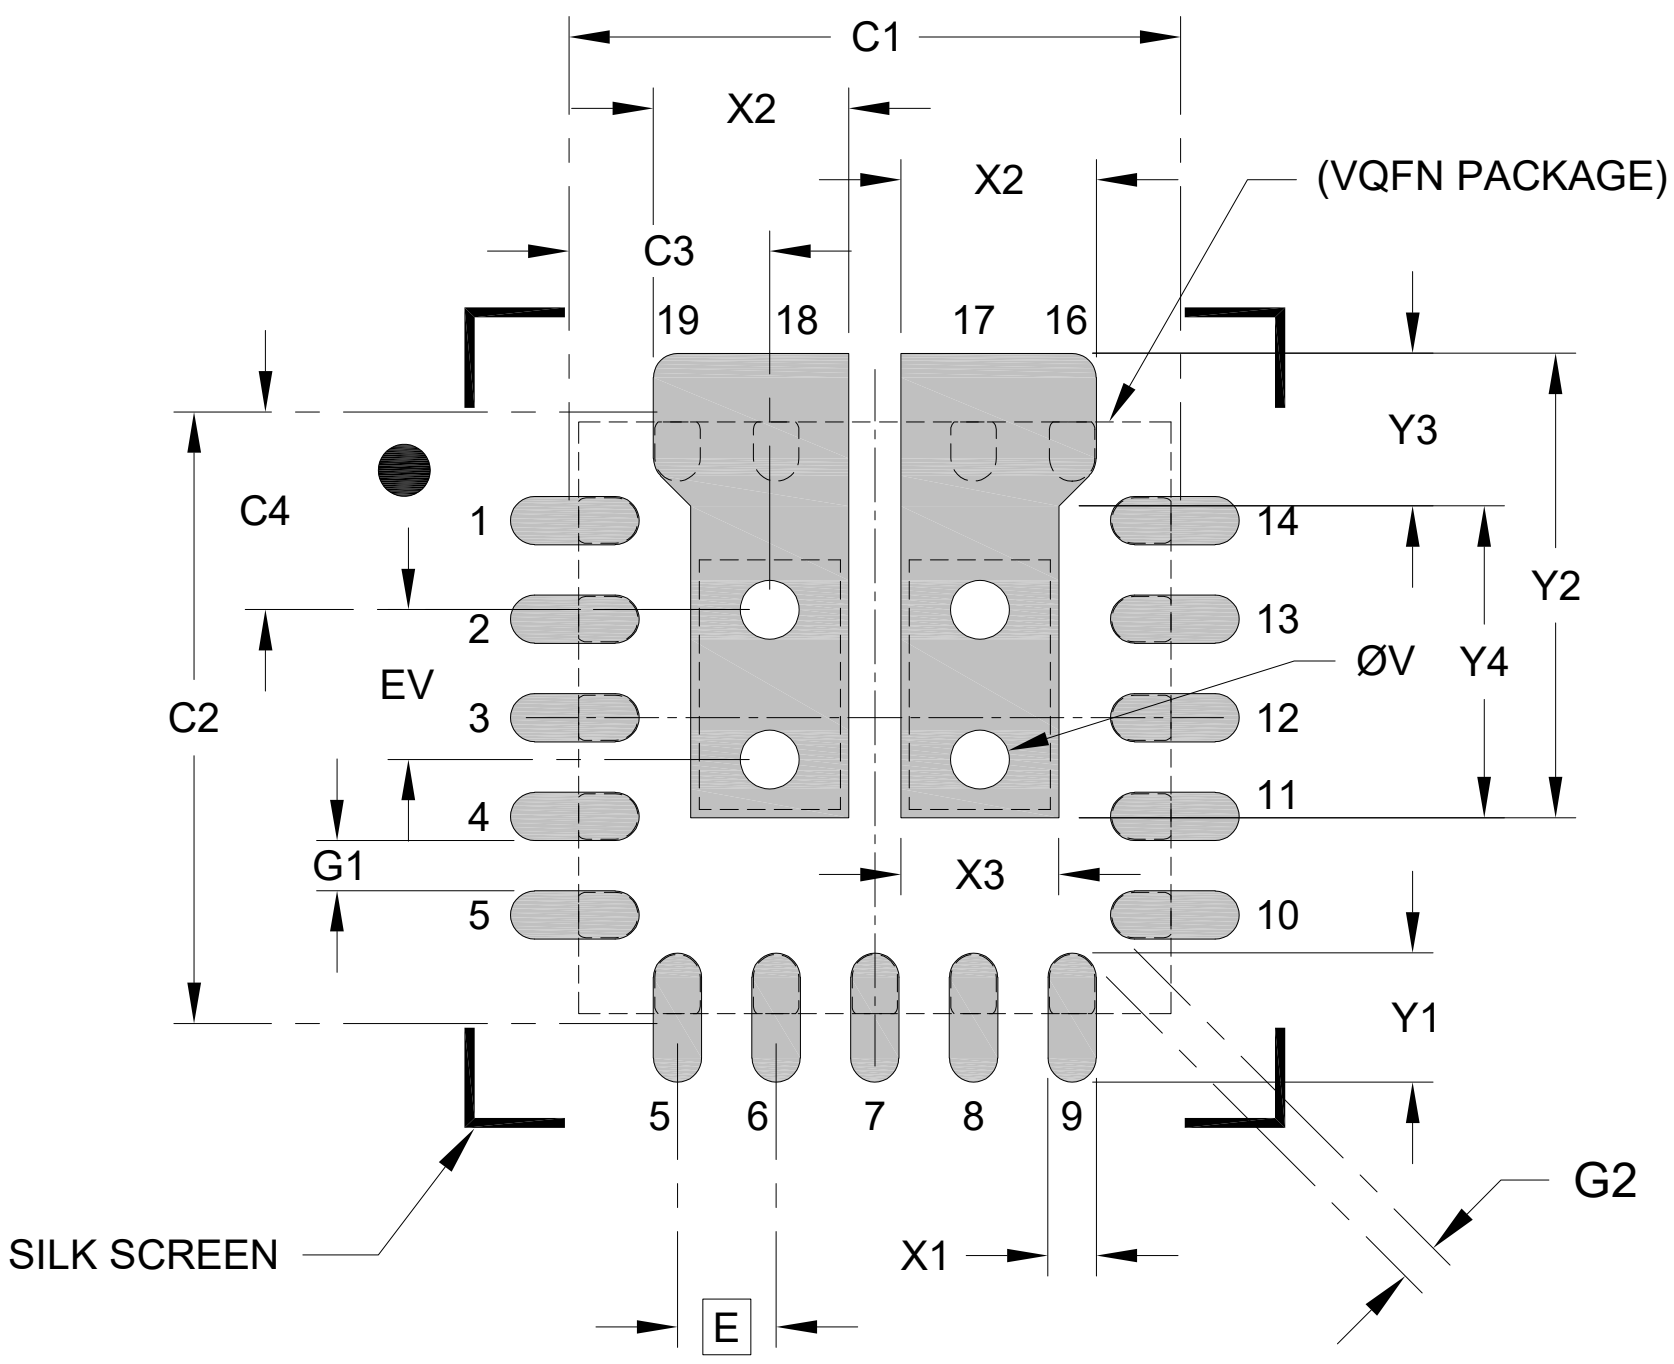

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Center Pad Width (X2)	X2			0.99
Center Pad Width (X2)	X3			0.80
Center Pad Length	Y2			0.80
Center Pad Length	Y3			1.35
Center Pad Length	Y4			1.58
Contact Pad Spacing	C1		3.10	
Contact Pad Spacing	C2		3.10	
Contact Pad to Thermal Via (X2)	C3		1.02	
Contact Pad to Thermal Via (X2)	C4		1.00	
Contact Pad Width (X15)	X1			0.25
Contact Pad Length (X15)	Y1			0.66
Contact Pad to Contact Pad (X12)	G1	0.25		
Contact Pad to Contact Pad (X4)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.07	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias should be filled or tented to avoid solder loss during reflow process.

Microchip Technology Drawing C04-3273-UCS-3205 Rev B