132-Lead Very Thin Plastic Quad Flat, No Lead Package (NVX) - 10x10x0.9 mm Body [VQFN]; With 5.5x5.5 mm Exposed Pad; Dual Row Terminals; Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

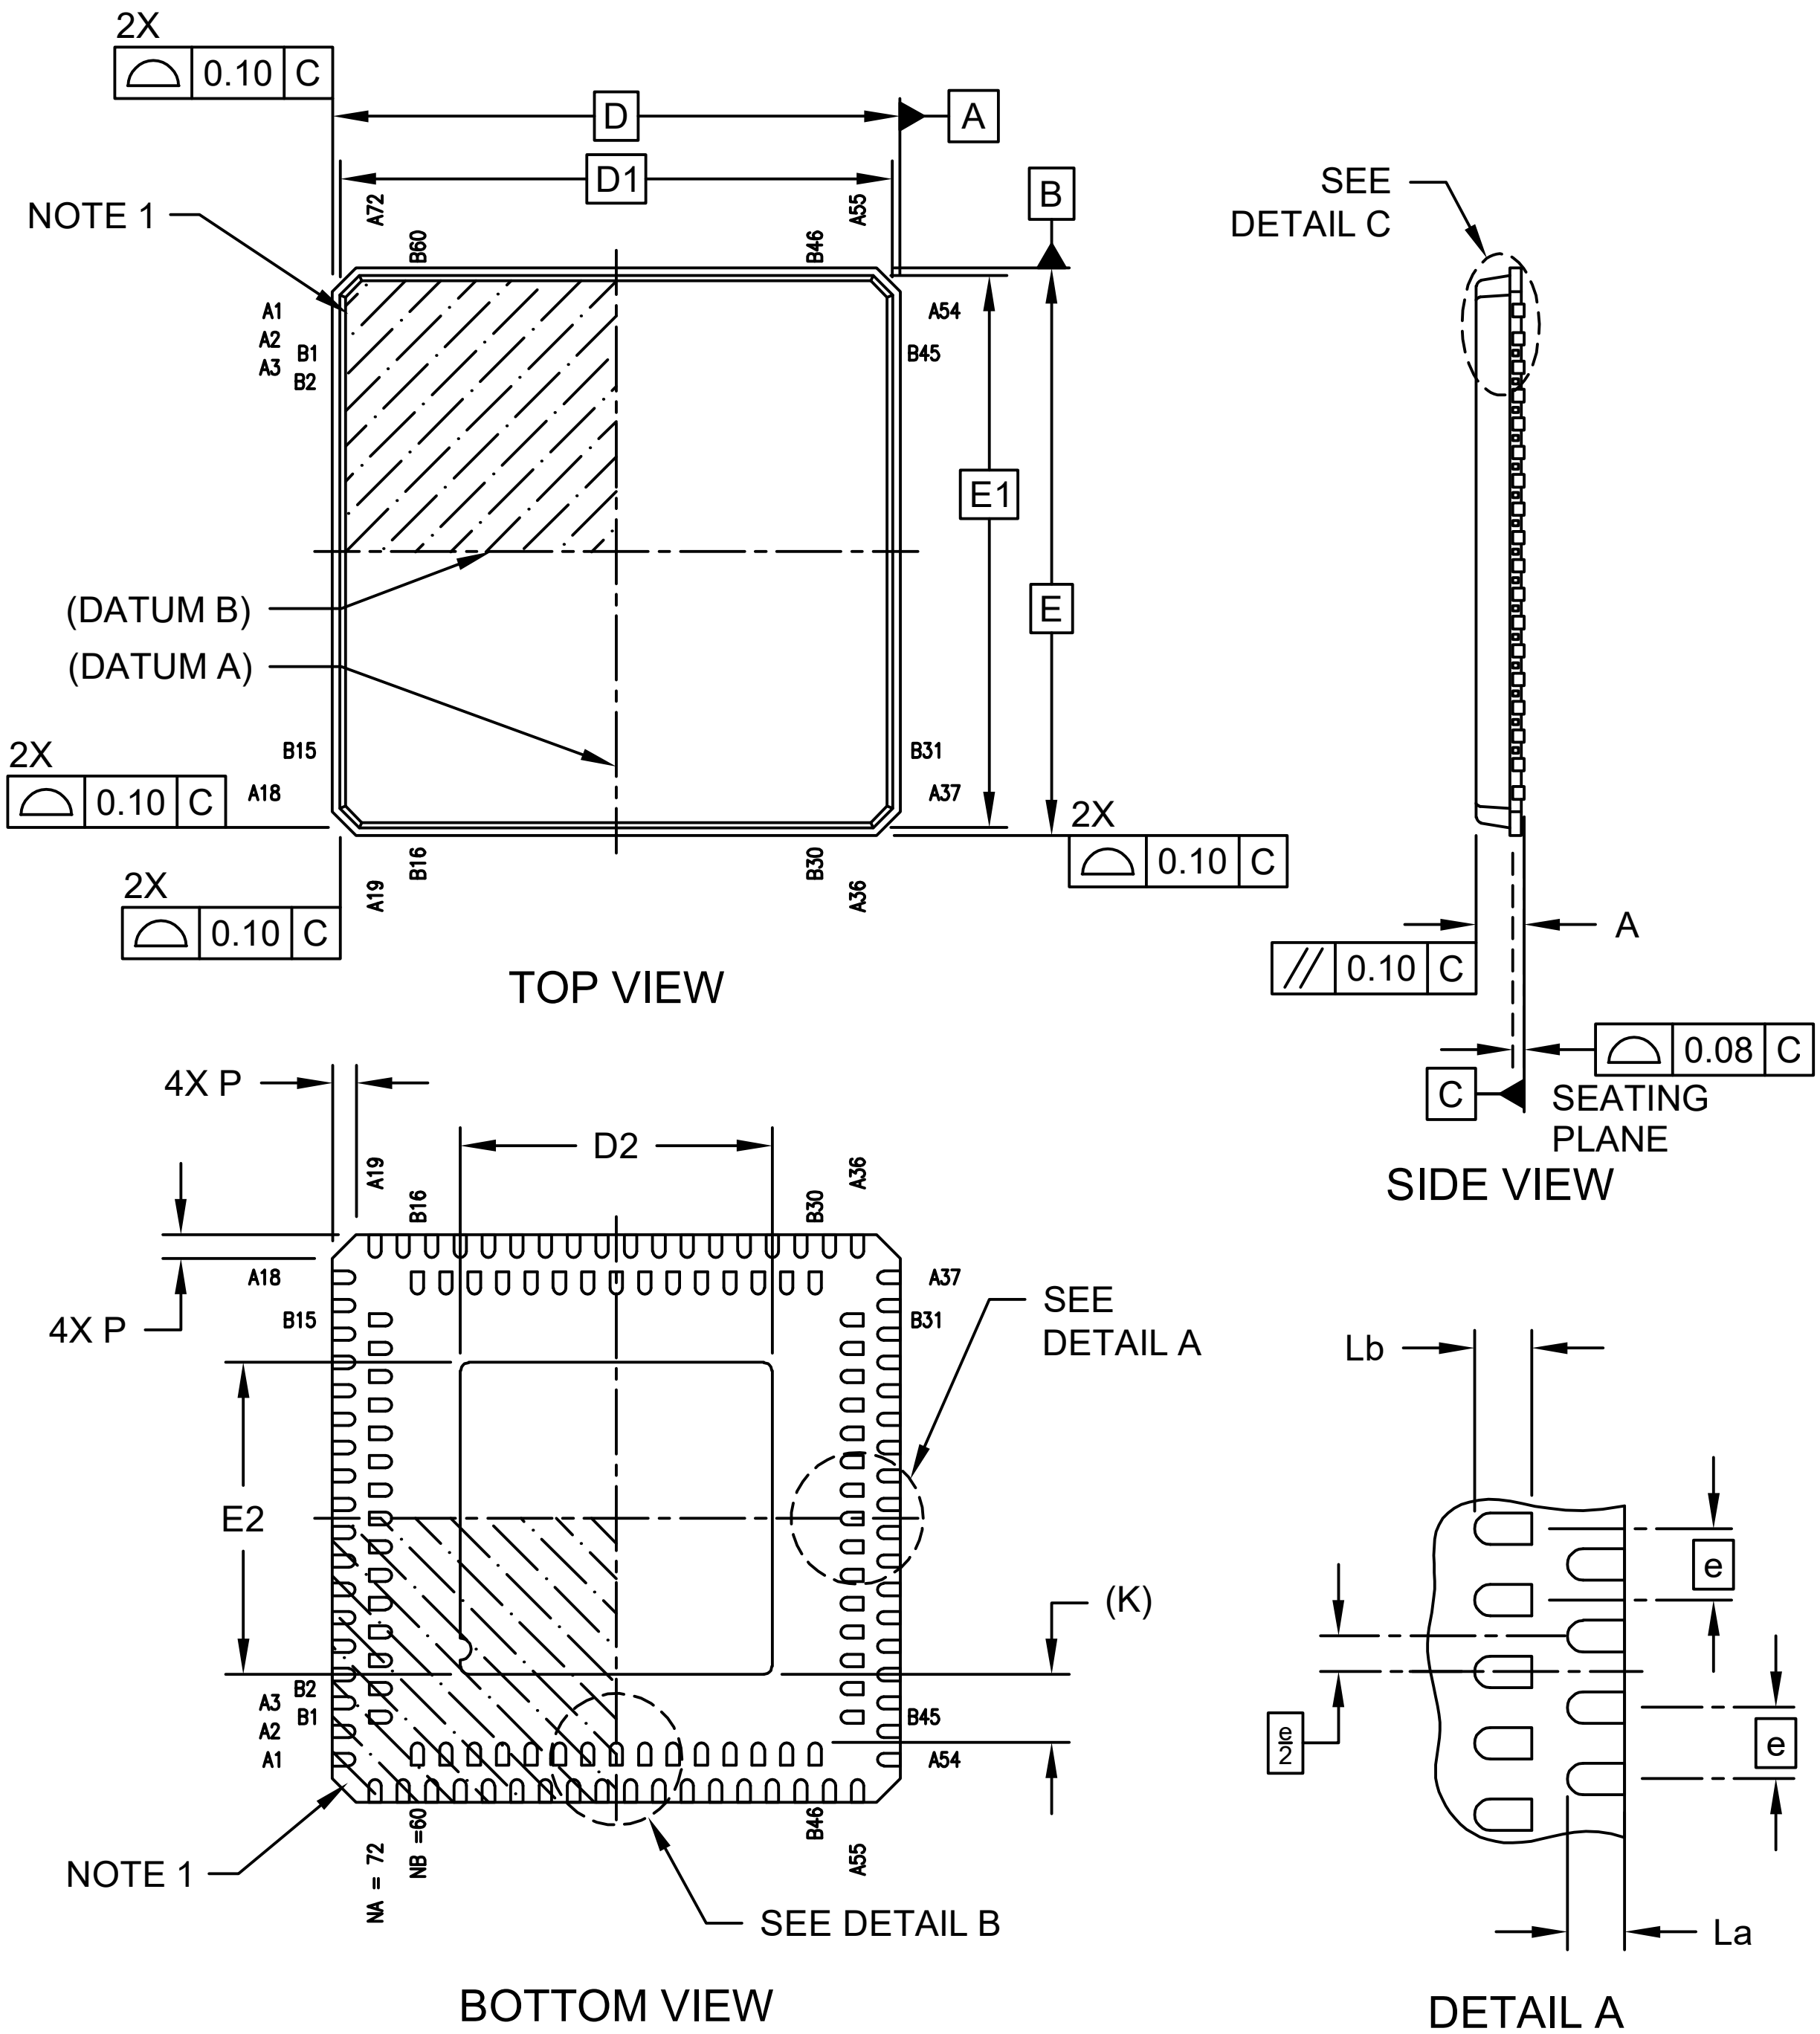

Microchip Technology Drawing C04-472 Rev. A Sheet 1 of 2

132-Lead Very Thin Plastic Quad Flat, No Lead Package (NVX) - 10x10x0.9 mm Body [VQFN]; With 5.5x5.5 mm Exposed Pad; Dual Row Terminals; Punch Singulated

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

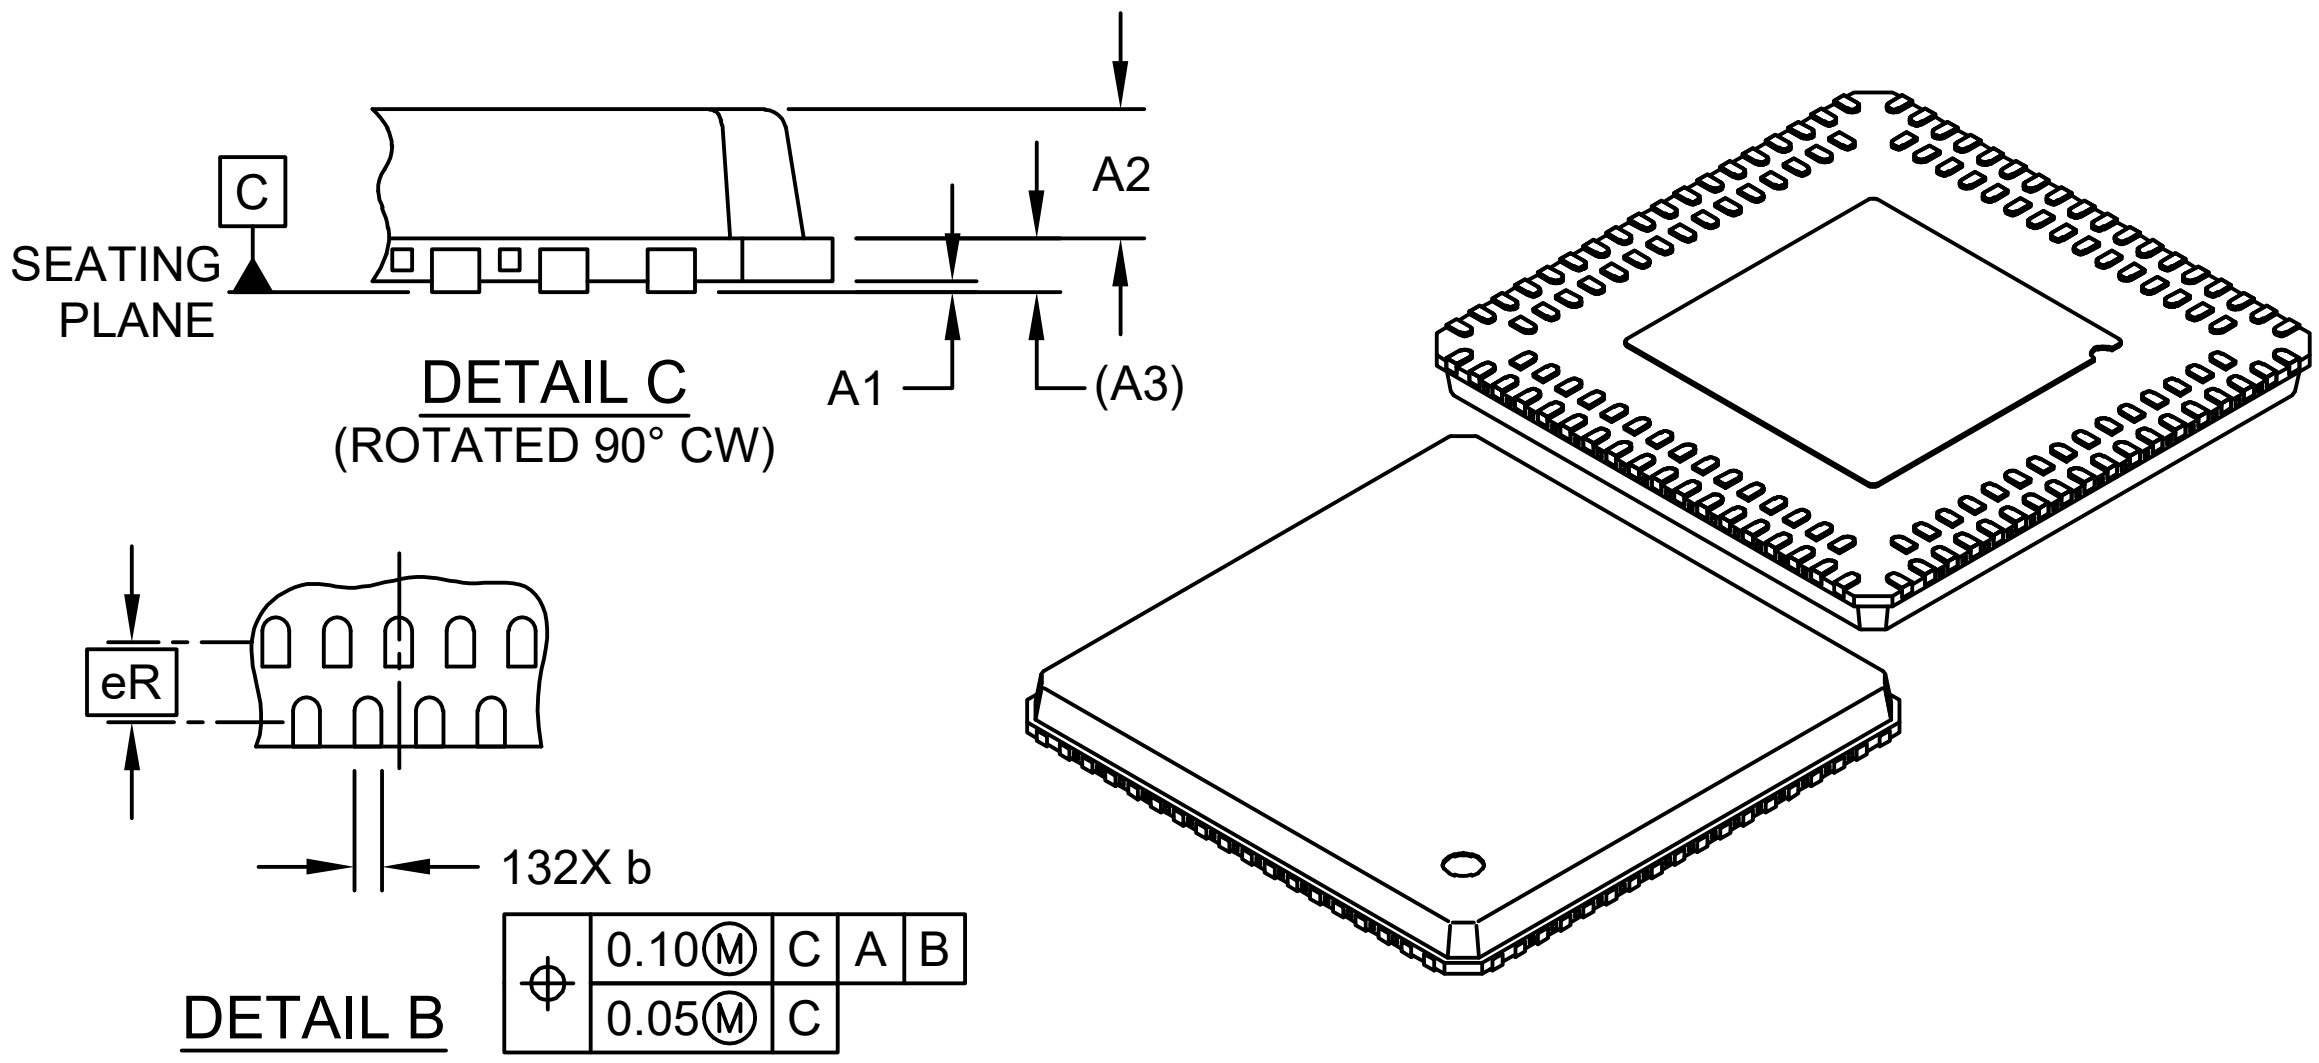

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		132	
Terminals in Outer Row A	NA		72	
Terminals in Inner Row B	NB		60	
Pitch	e		0.50 BSC	
Pitch Between Rows	eR		0.65 BSC	
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.01	0.05
Mold Cap Height	A2	0.55	0.60	0.65
Base Thickness	A3		0.25 REF	
Overall Length	D		10.00 BSC	
Mold Cap Length	D1		9.73 BSC	
Exposed Pad Length	D2	5.40	5.50	5.60
Overall Width	E		10.00 BSC	
Mold Cap Width	E1		9.73 BSC	
Exposed Pad Width	E2	5.40	5.50	5.60
Terminal Length, Outer Row	La	0.30	0.40	0.50
Terminal Length, Inner Row	Lb	0.30	0.40	0.50
Terminal Width	b	0.17	0.22	0.27
Terminal-to-Exposed-Pad	K		0.20 MIN REF	
Corner Chamfer	P	0.24	0.42	0.60

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is punch singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-472 Rev. A Sheet 2 of 2

132-Lead Very Thin Plastic Quad Flat, No Lead Package (NVX) - 10x10x0.9 mm Body [VQFN]; With 5.5x5.5 mm Exposed Pad; Dual Row Terminals; Punch Singulated

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

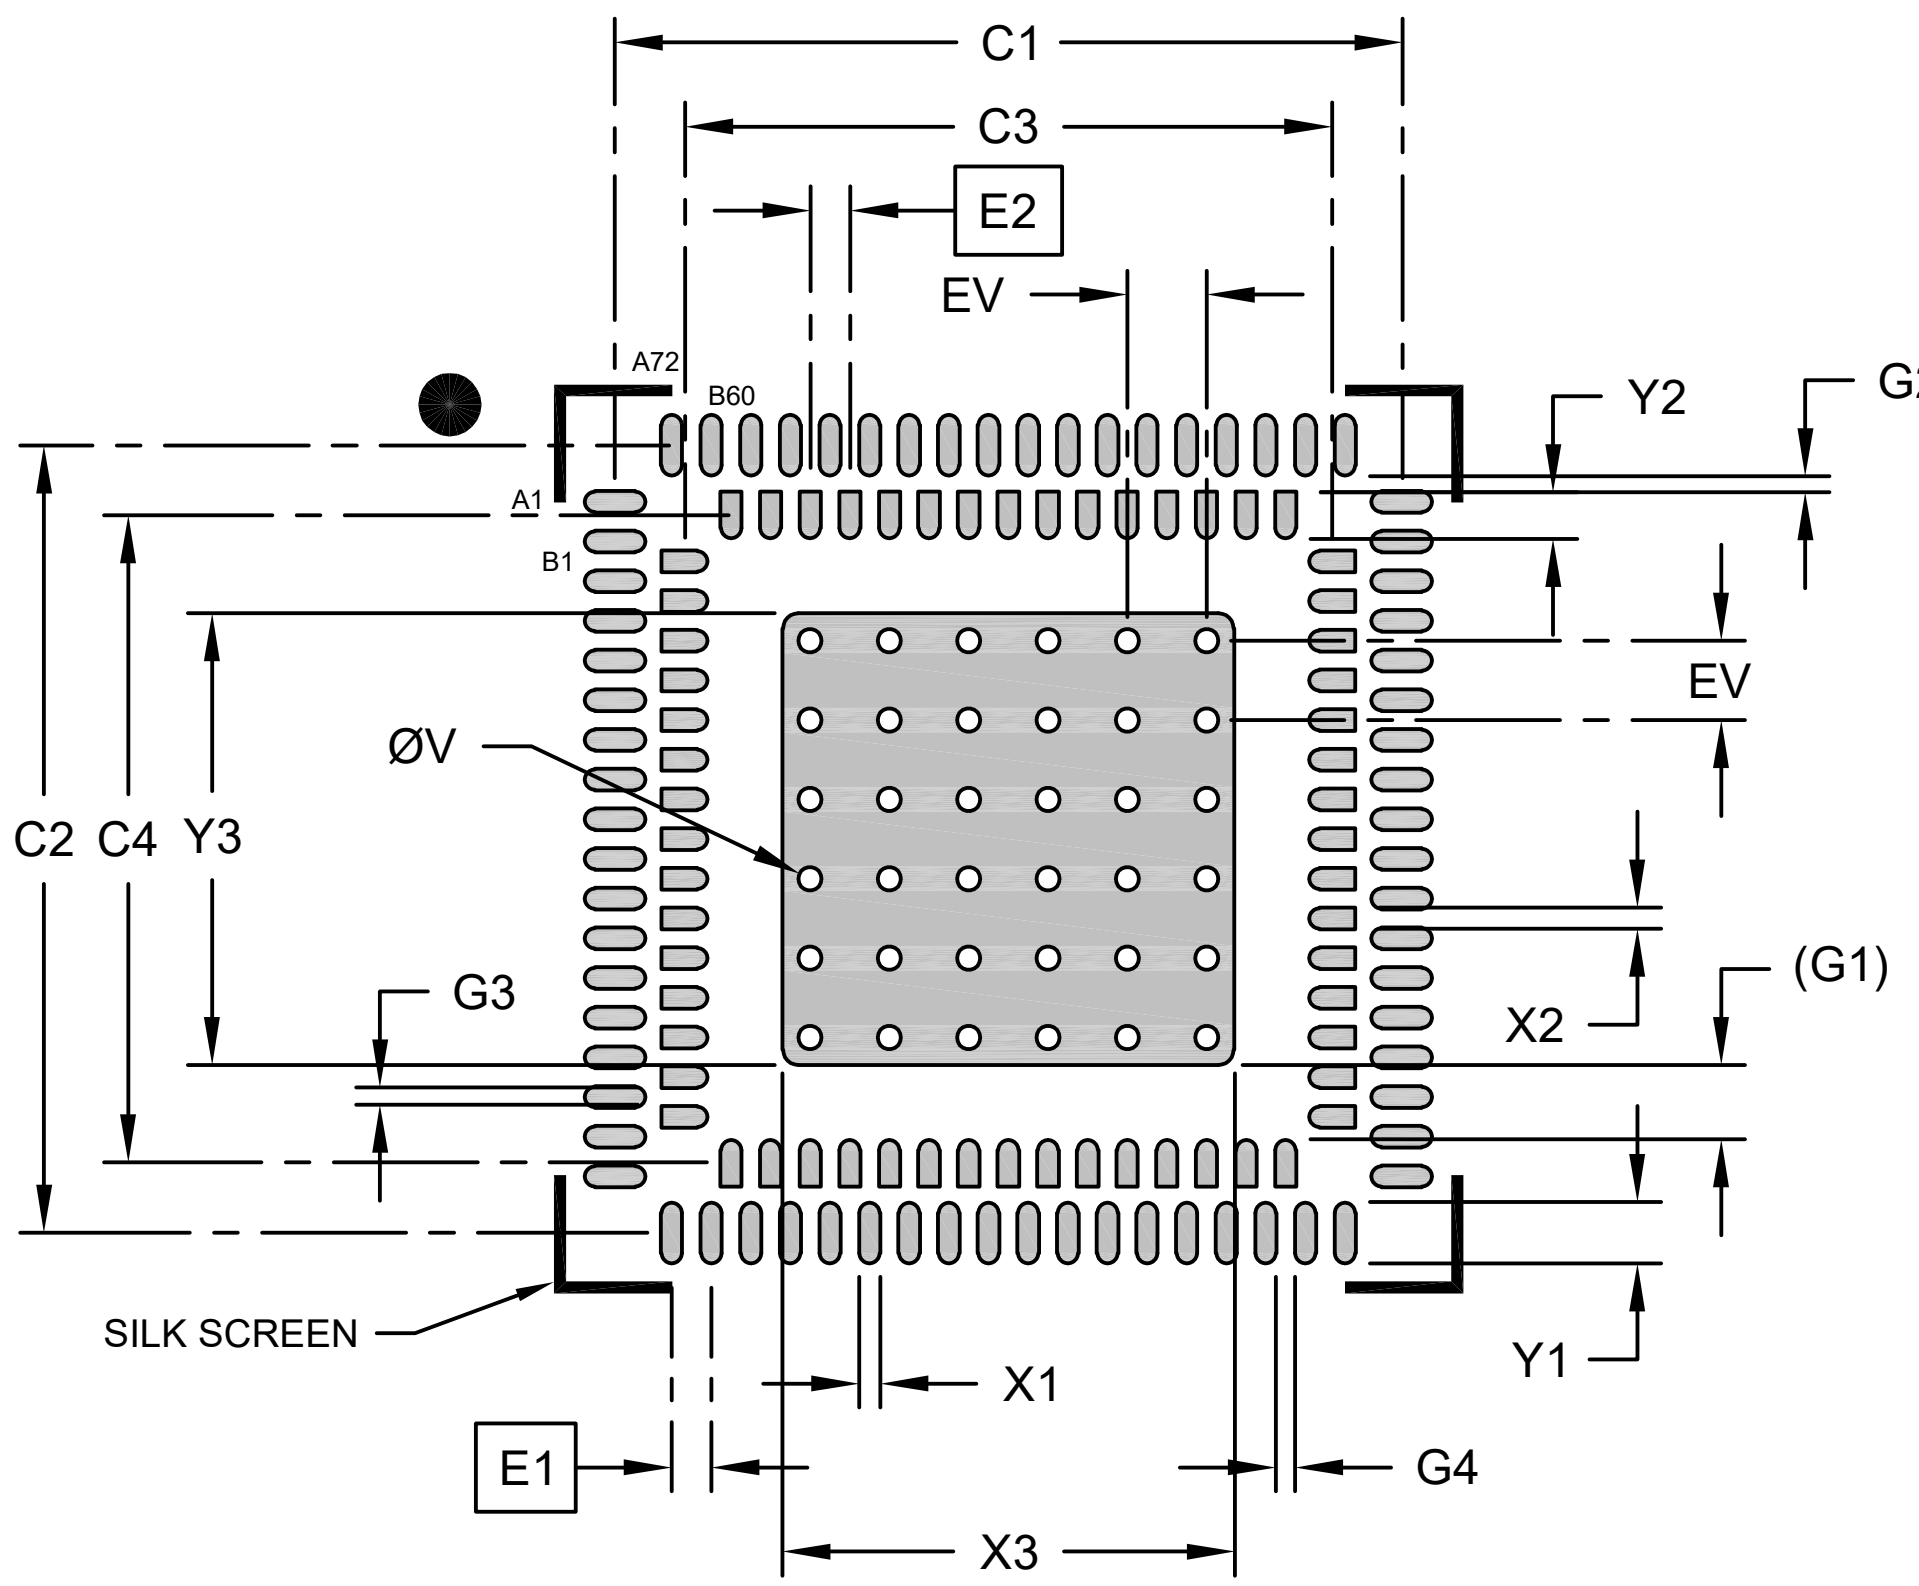

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Outer Contact Pitch	E1		0.50 BSC	
Inner Contact Pitch	E2		0.50 BSC	
Outer Contact Pad Width (X72)	X1			0.30
Inner Contact Pad Width (X60)	X2			0.30
Optional Center Pad Width	X3			5.60
Optional Center Pad Length	Y3			5.60
Outer Contact Pad Spacing	C1		9.93	
Outer Contact Pad Spacing	C2		9.93	
Inner Contact Pad Spacing	C3		8.16	

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Inner Contact Pad Spacing	C4		8.16	
Outer Contact Pad Length (X72)	Y1			0.78
Inner Contact Pad Length (X60)	Y2			0.59
Contact Pad to Center Pad (X60)	G1		1.20 REF	
Inner Pad Row to Outer Pad Row	G2	0.20		
Contact Pad to Contact Pad (X68)	G3	0.20		
Contact Pad to Contact Pad (X56)	G4	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2472 Rev. A