82-Lead Thin Fine Pitch Ball Grid Array (9LX) - 5.5x5.5 mm Body [TFBGA]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

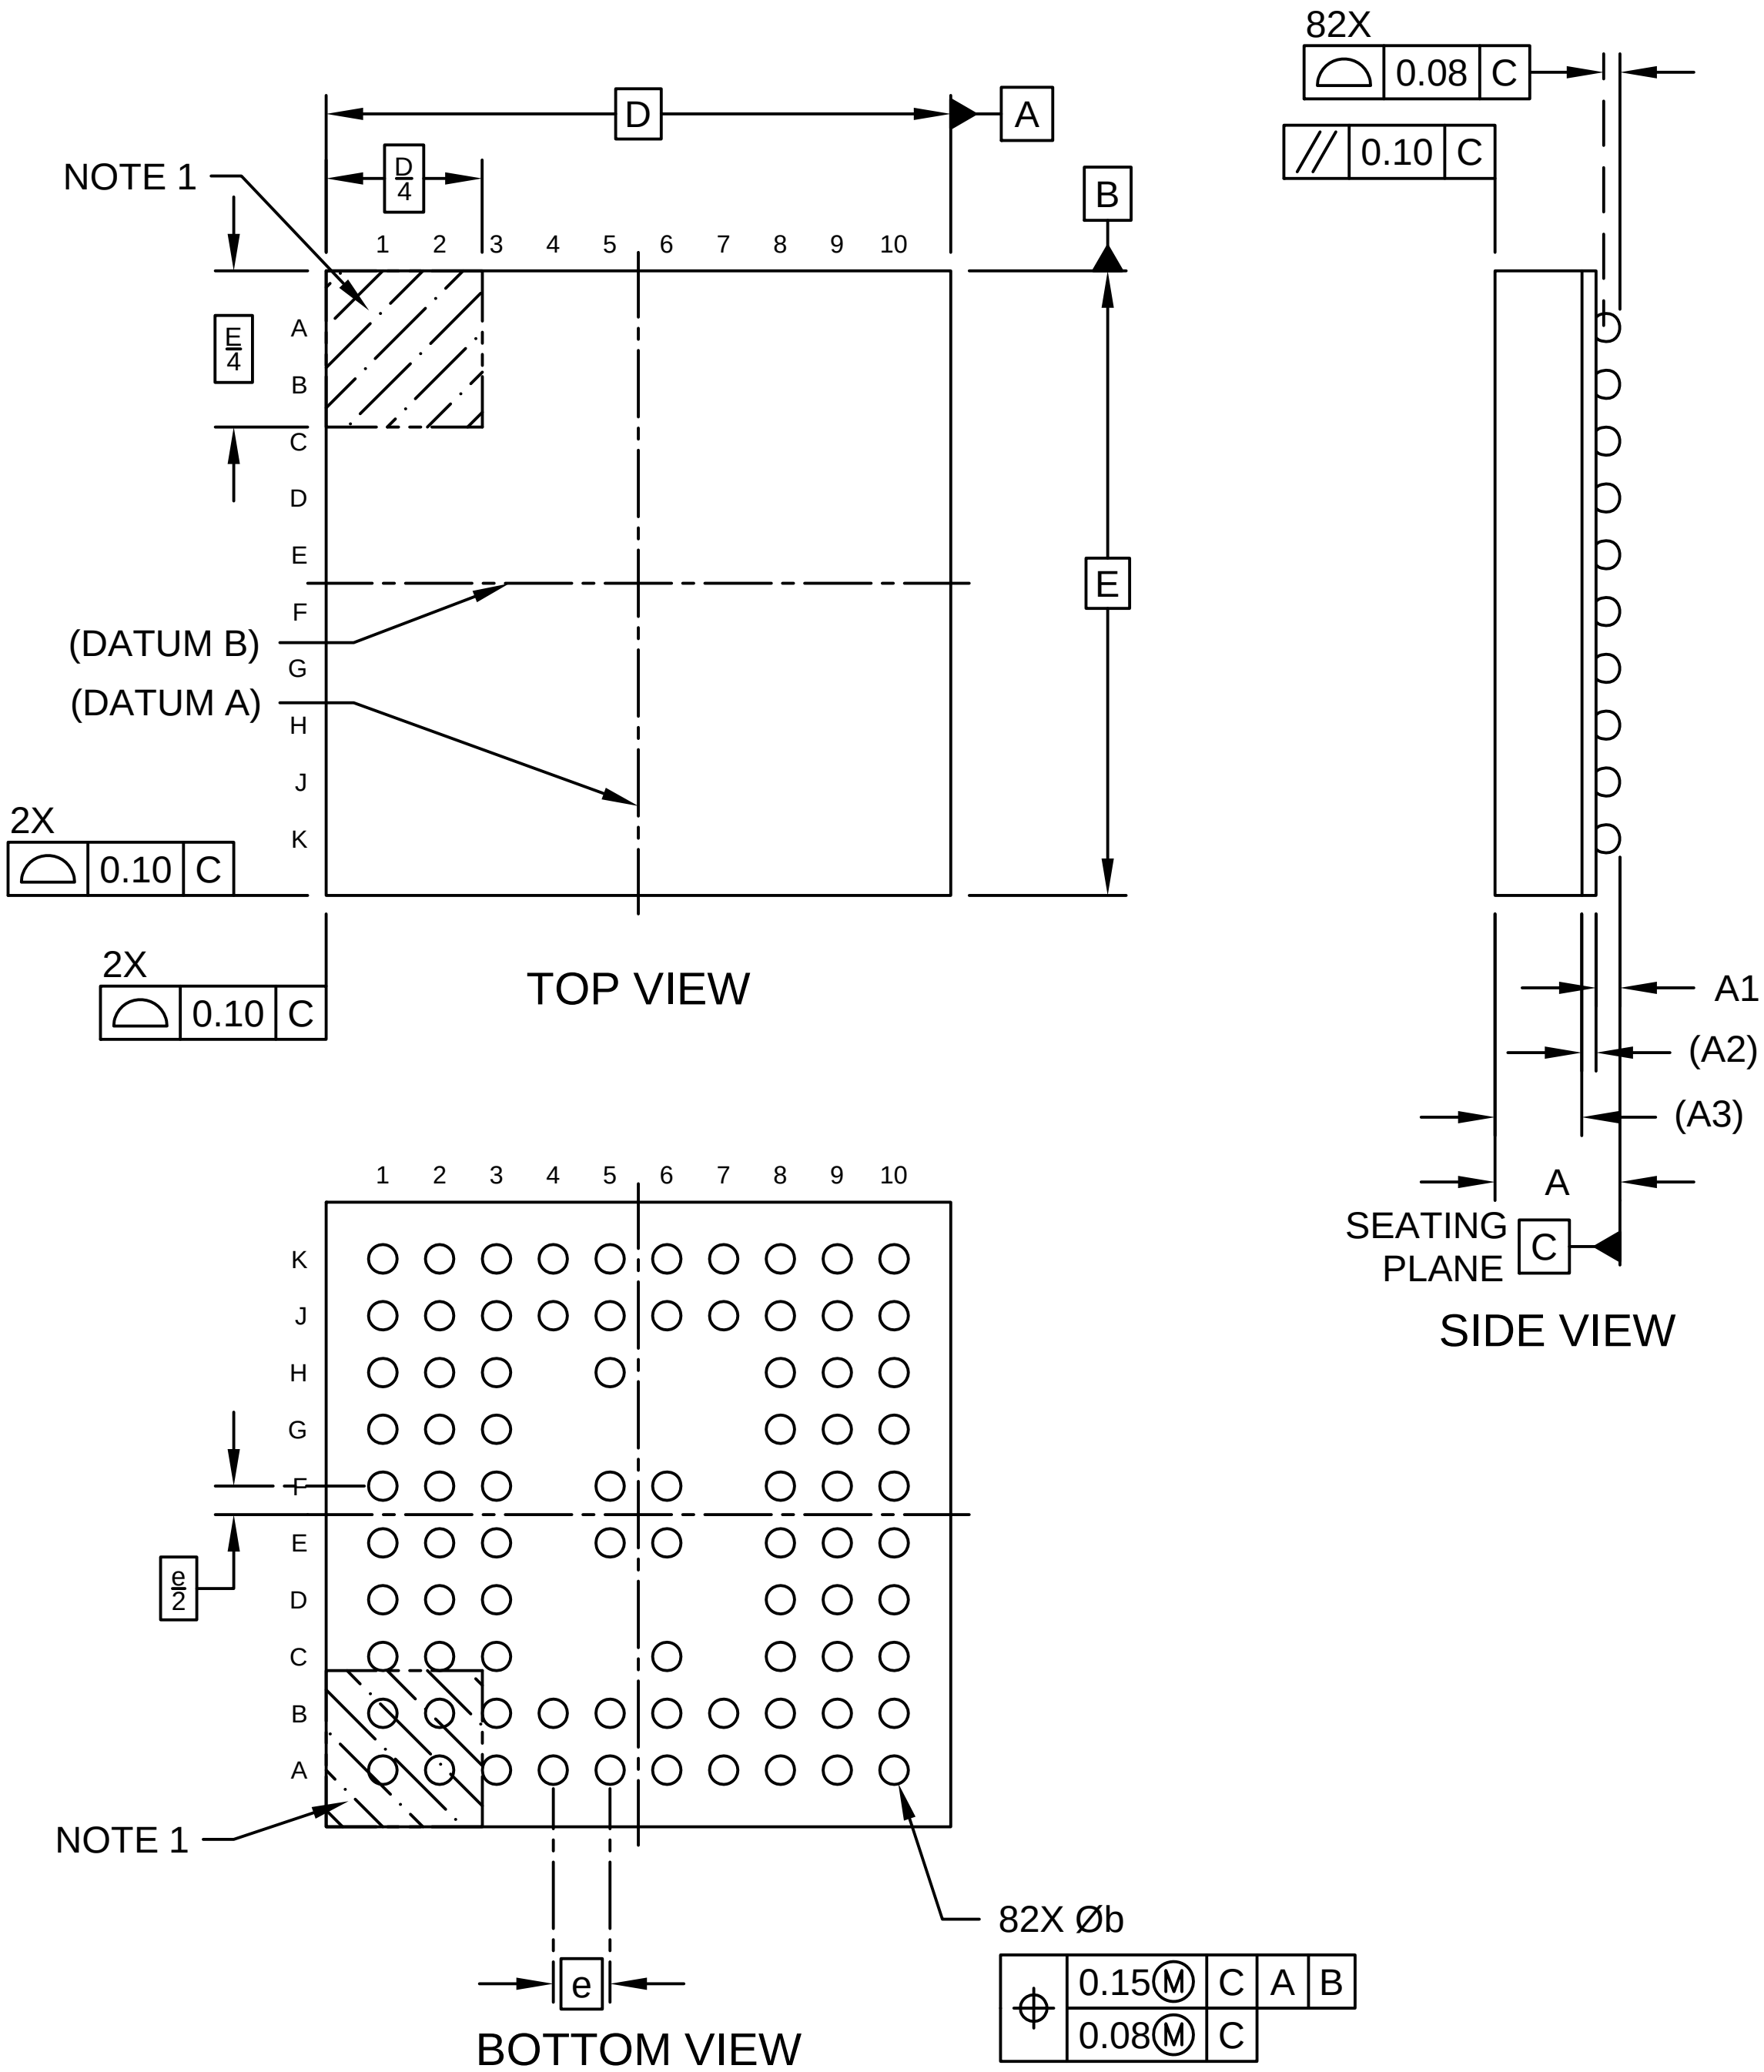

82-Lead Thin Fine Pitch Ball Grid Array (9LX) - 5.5x5.5 mm Body [TFBGA]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

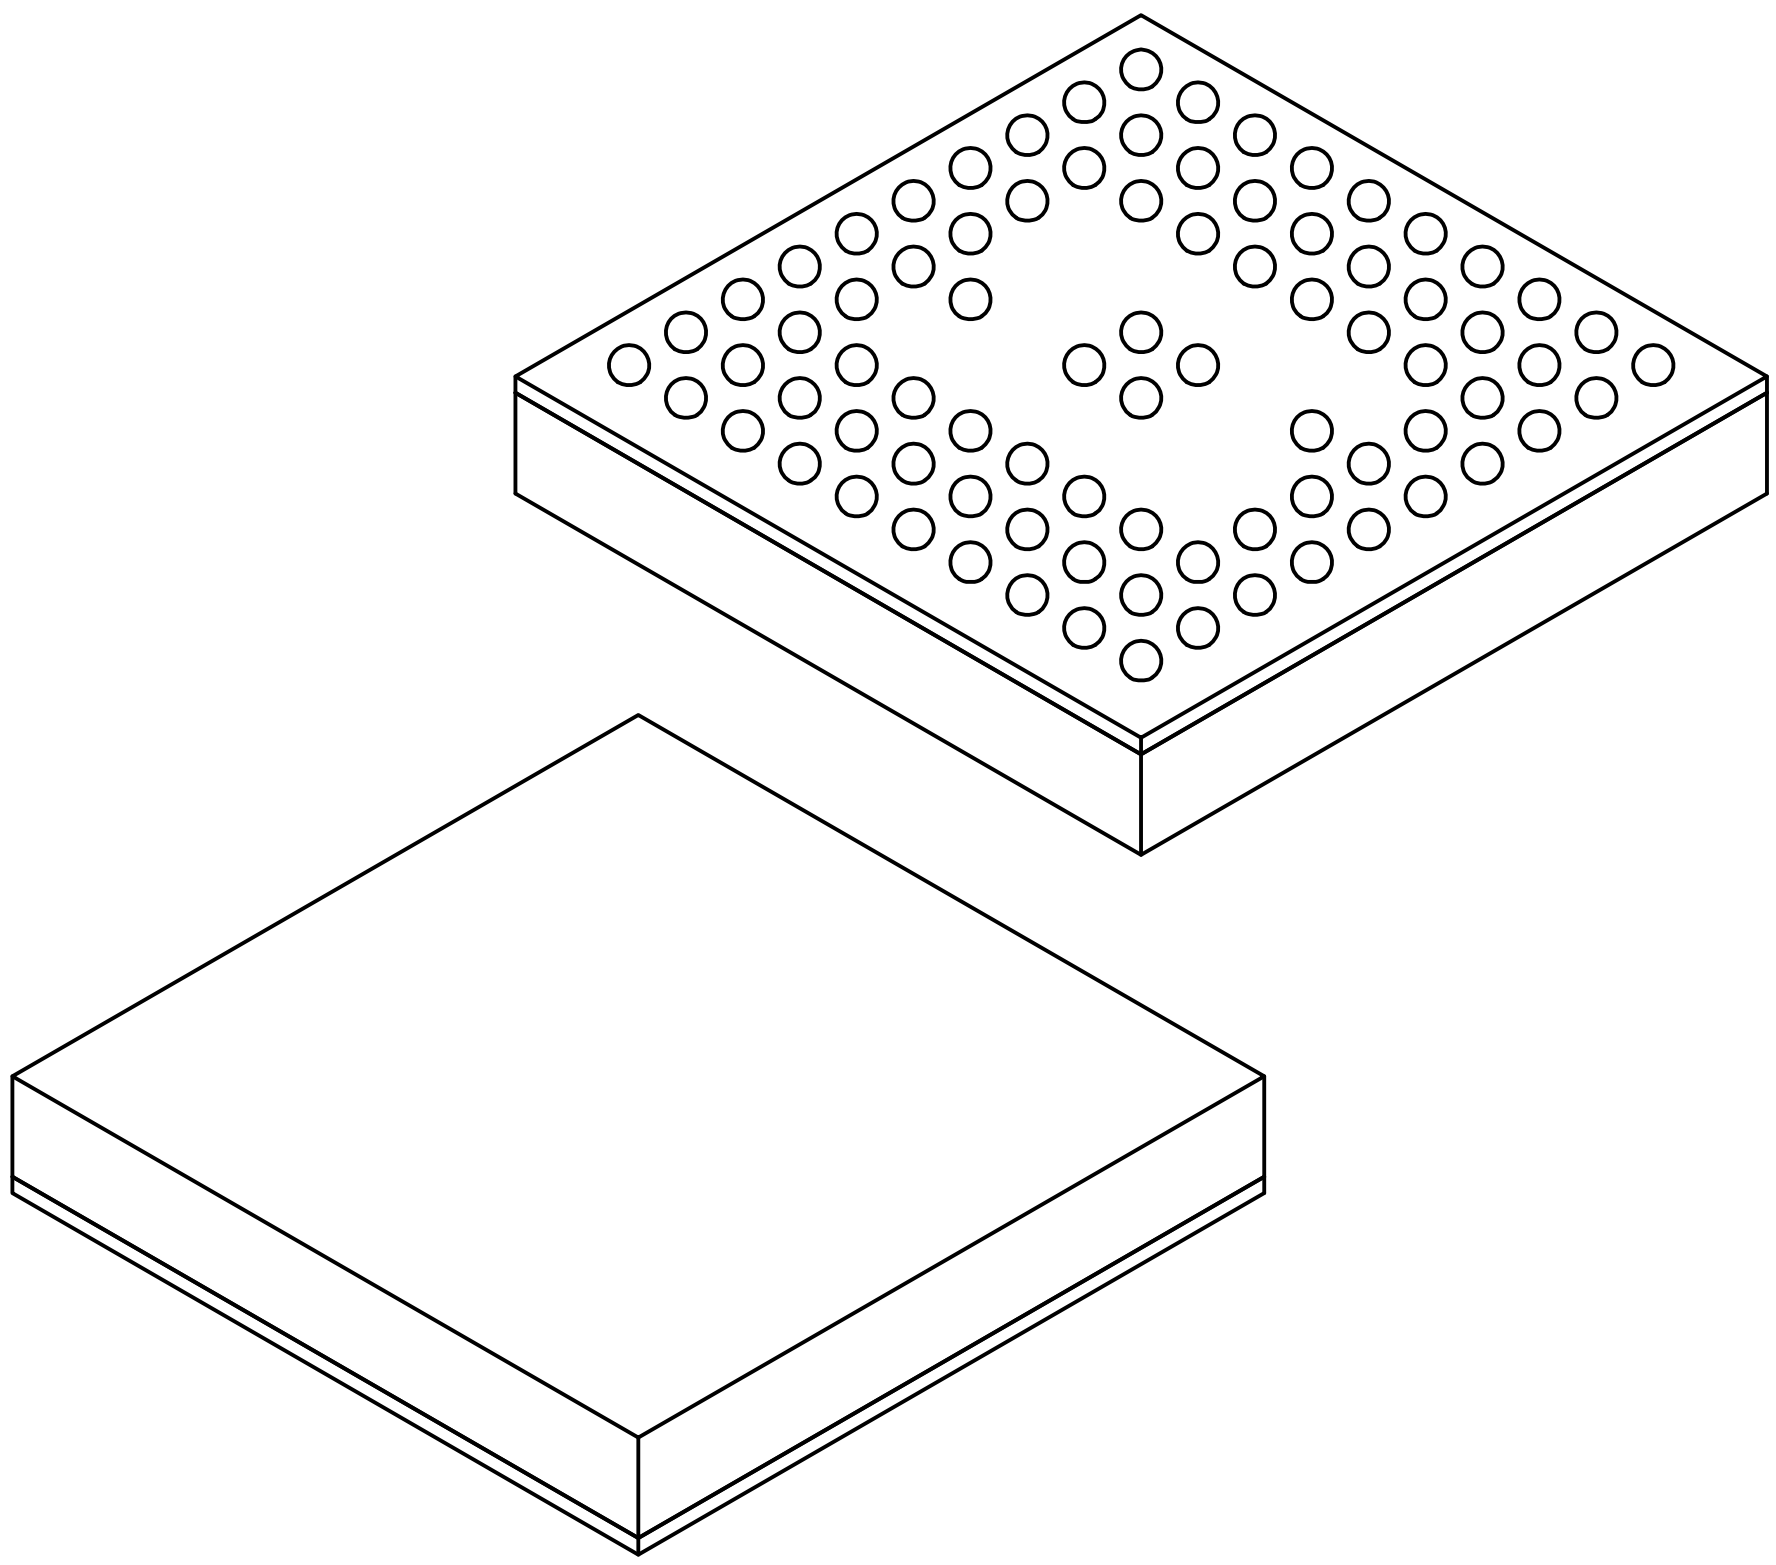

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N		82	
Pitch	e		0.50 BSC	
Overall Height	A	-	-	1.10
Standoff	A1	0.11	-	0.21
Substrate Thickness	A2		0.125 REF	
Mold Cap Thickness	A3		0.70 REF	
Overall Length	D		5.50 BSC	
Overall Width	E		5.50 BSC	
Ball Diameter	b	0.20	0.25	0.30

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-492 Rev A Sheet 2 of 2

82-Lead Thin Fine Pitch Ball Grid Array (9LX) - 5.5x5.5 mm Body [TFBGA]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

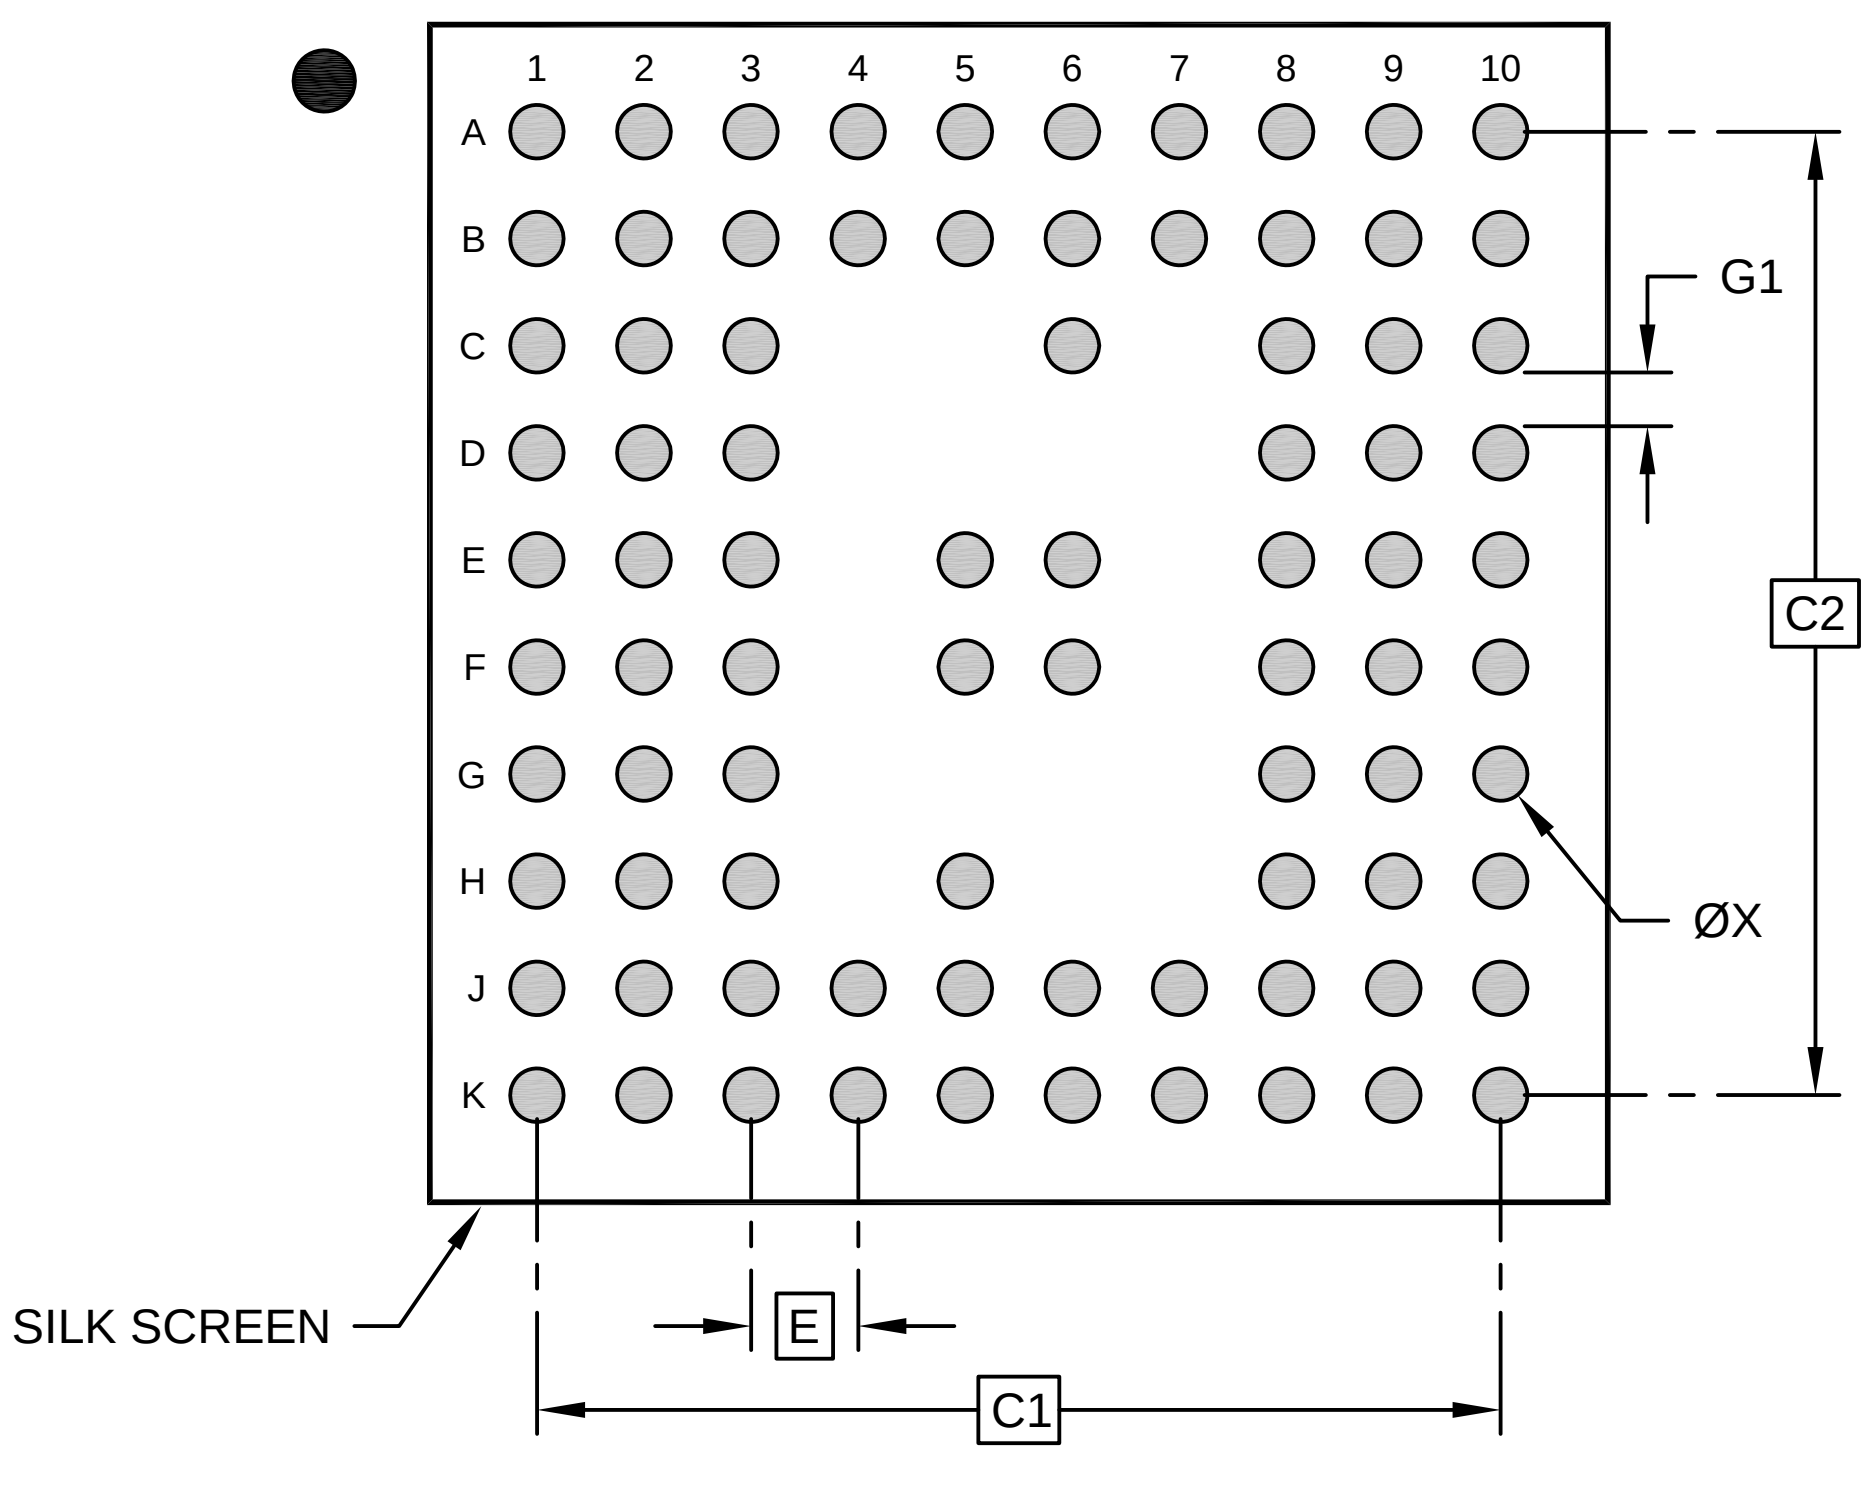

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Contact Pad Spacing	C1		4.50 BSC	
Contact Pad Spacing	C2		4.50 BSC	
Contact Pad Diameter (X82)	X1			0.25
Contact Pad to Contact Pad (X16)	G1	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2492 Rev A