24-Lead Very Thin Plastic Quad Flat, No Lead Package (PLX) - 5x5x1.0 mm Body [VQFN] With 3.25 mm Exposed Pad and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

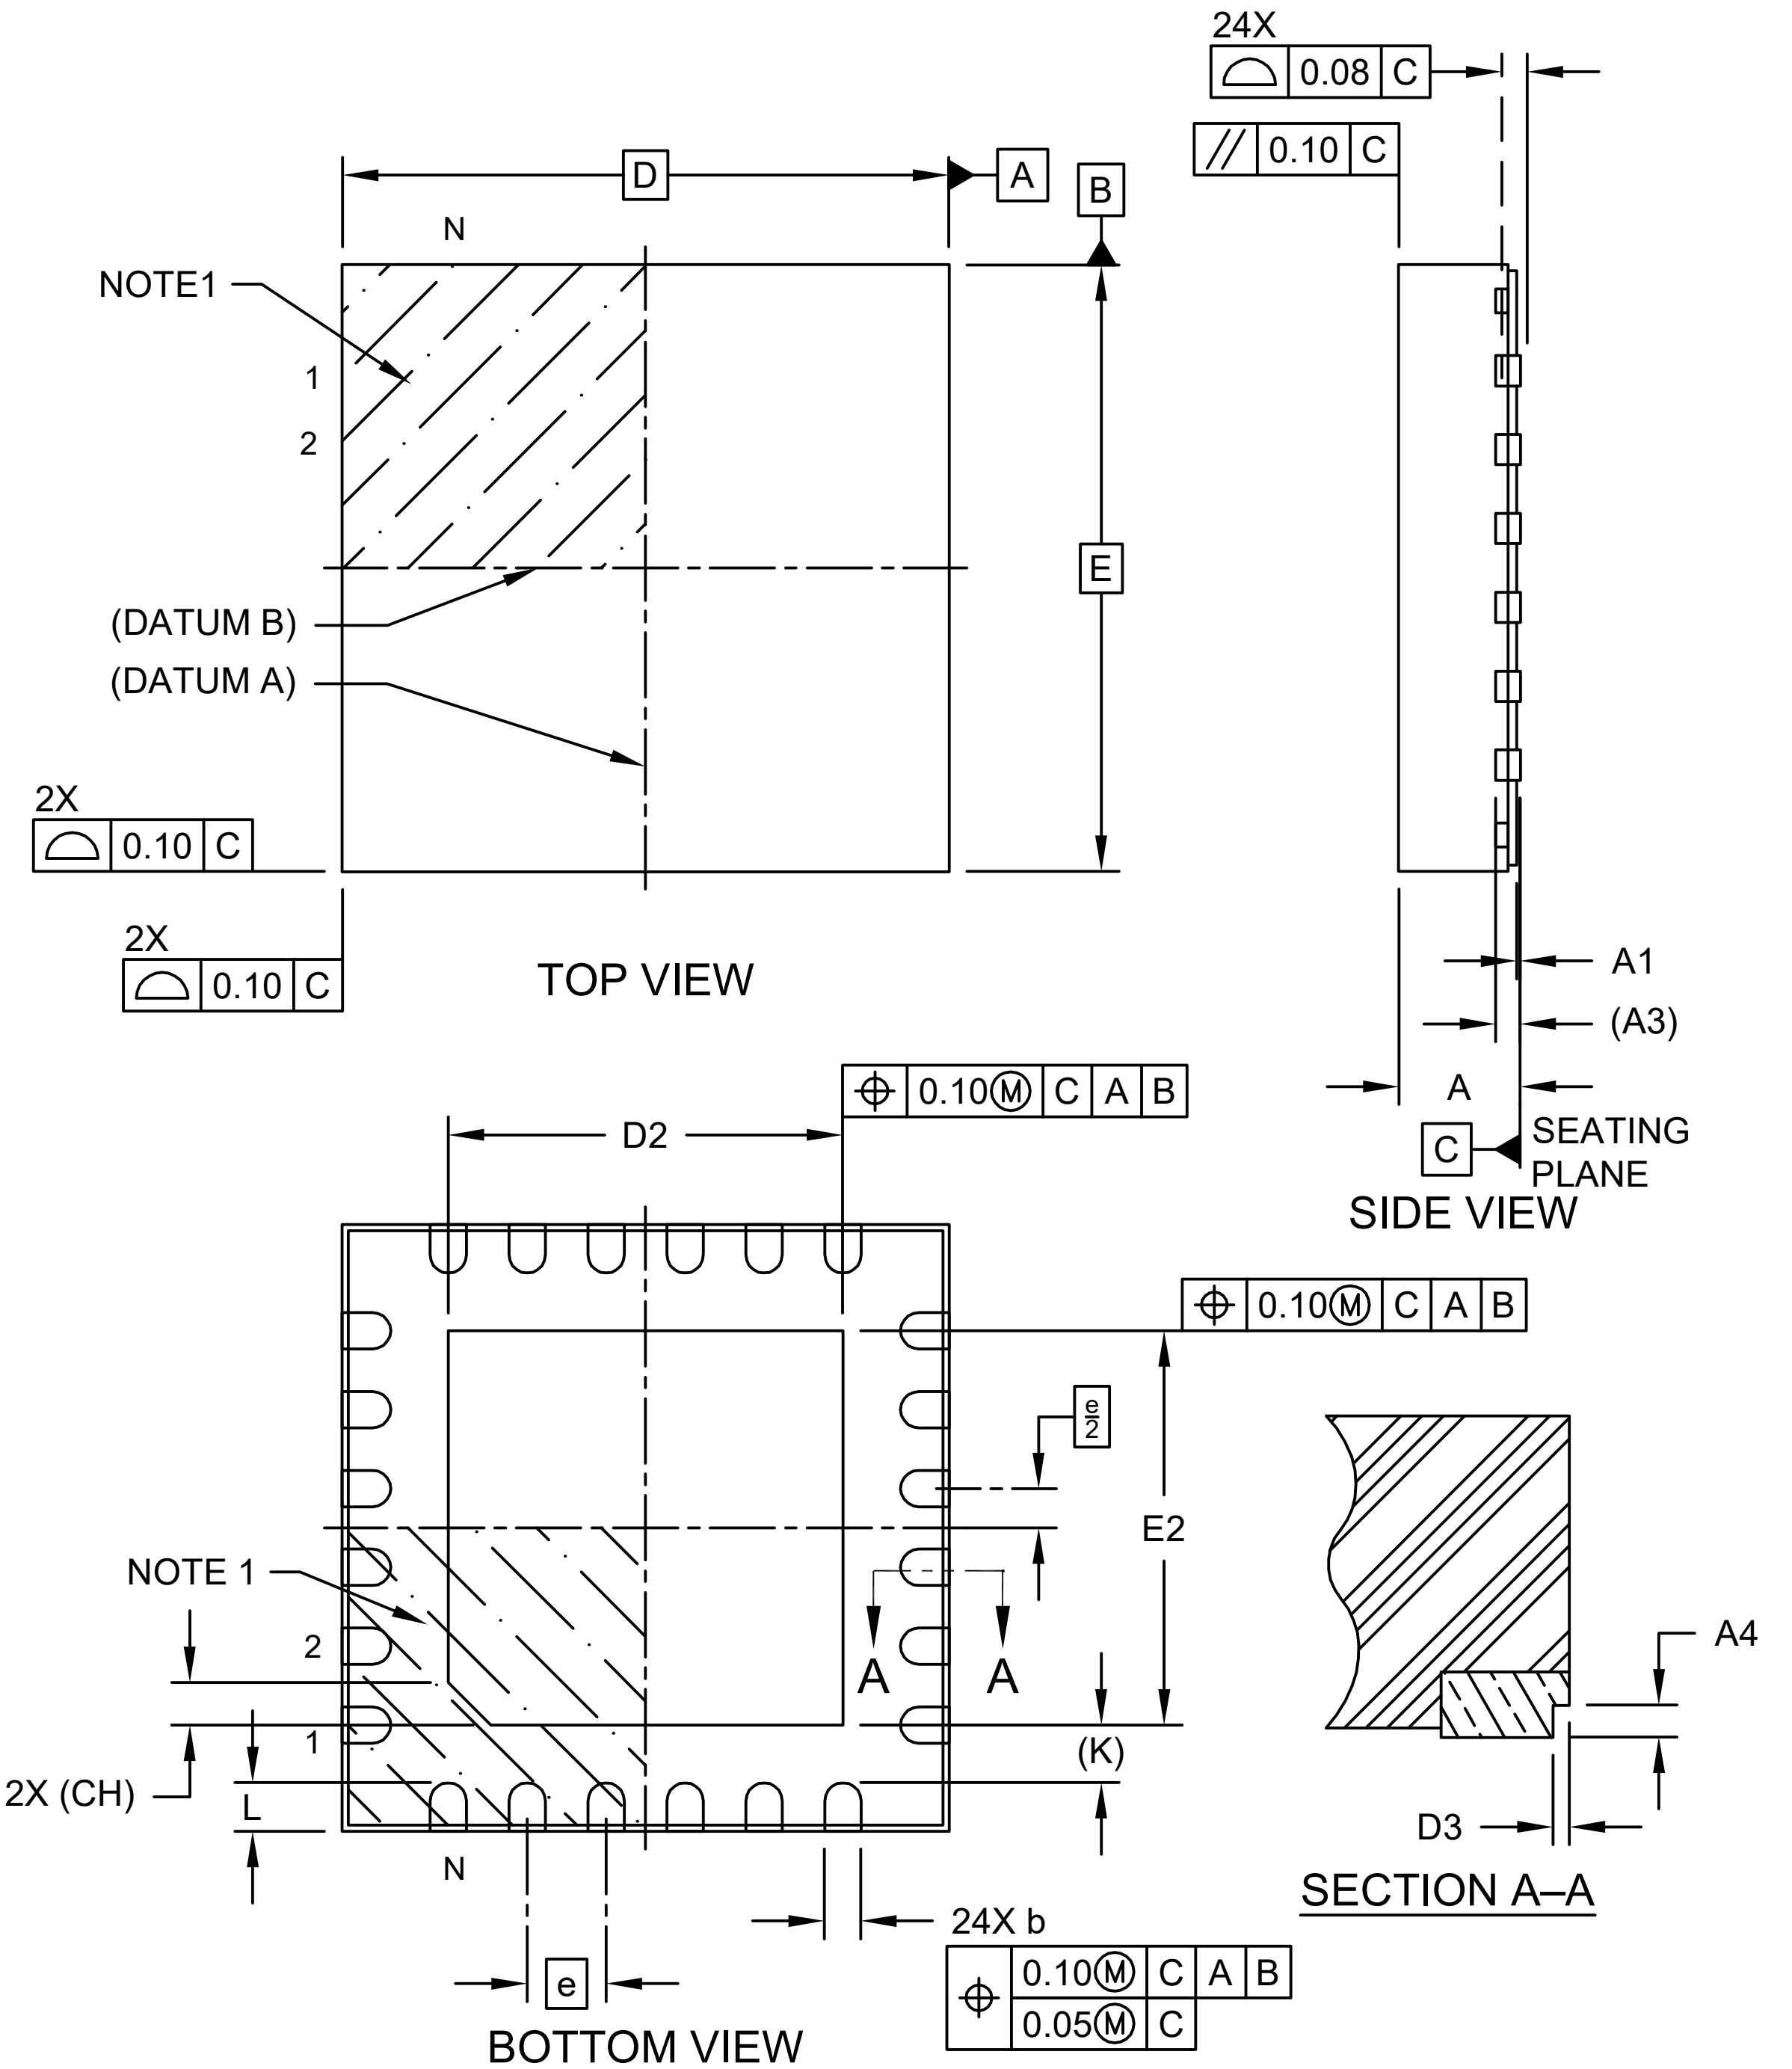

Microchip Technology Drawing C04-525 Rev B Sheet 1 of 2

24-Lead Very Thin Plastic Quad Flat, No Lead Package (PLX) - 5x5x1.0 mm Body [VQFN] With 3.25 mm Exposed Pad and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

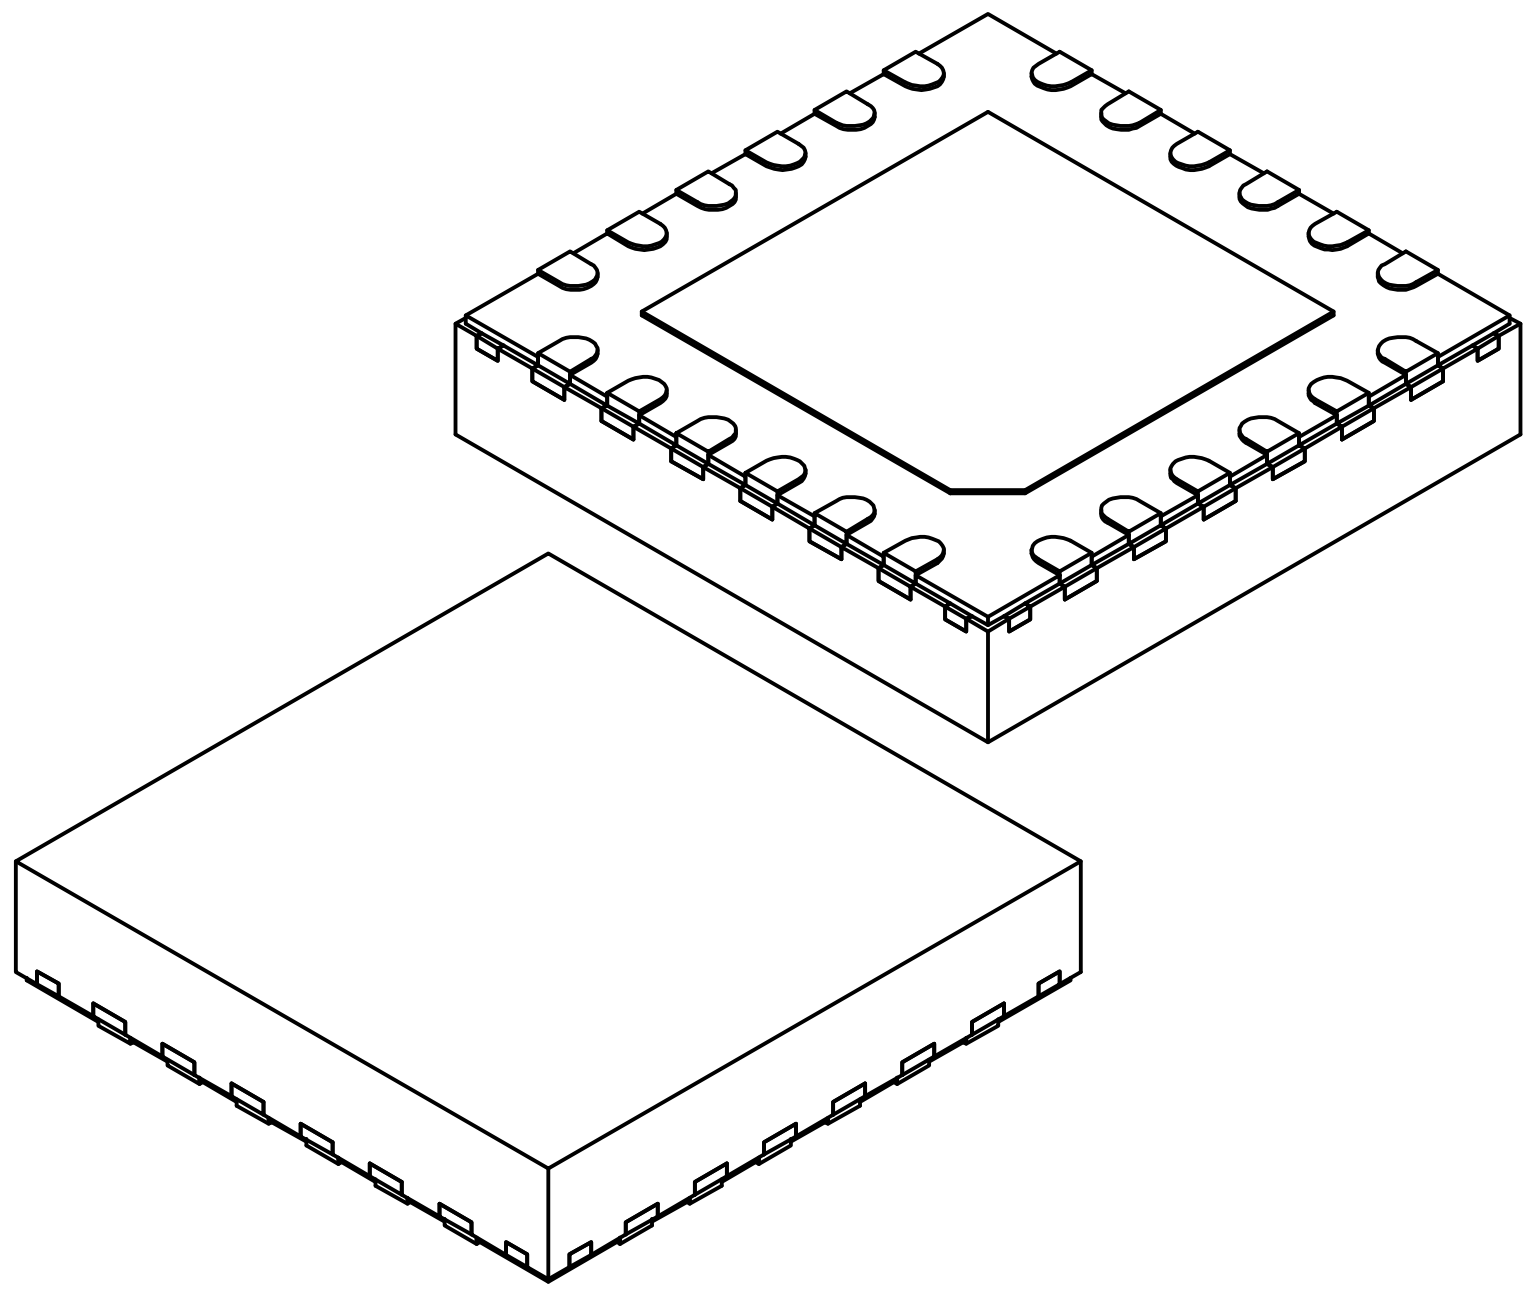

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		24	
Pitch	e		0.65 BSC	
Overall Height	A	0.90	0.95	1.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF	
Overall Length	D		5.00 BSC	
Exposed Pad Length	D2	3.15	3.25	3.35
Overall Width	E		5.00 BSC	
Exposed Pad Width	E2	3.15	3.25	3.35
Index Corner Chamfer	CH		0.35 REF	
Terminal Width	b	0.25	0.30	0.35
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed-Pad	K		0.475 REF	
Wettable Flank Step Cut Length	D3	-	-	0.085
Wettable Flank Step Cut Height	A4	0.10	-	0.19

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-525 Rev B Sheet 2 of 2

24-Lead Very Thin Plastic Quad Flat, No Lead Package (PLX) - 5x5x1.0 mm Body [VQFN] With 3.25 mm Exposed Pad and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

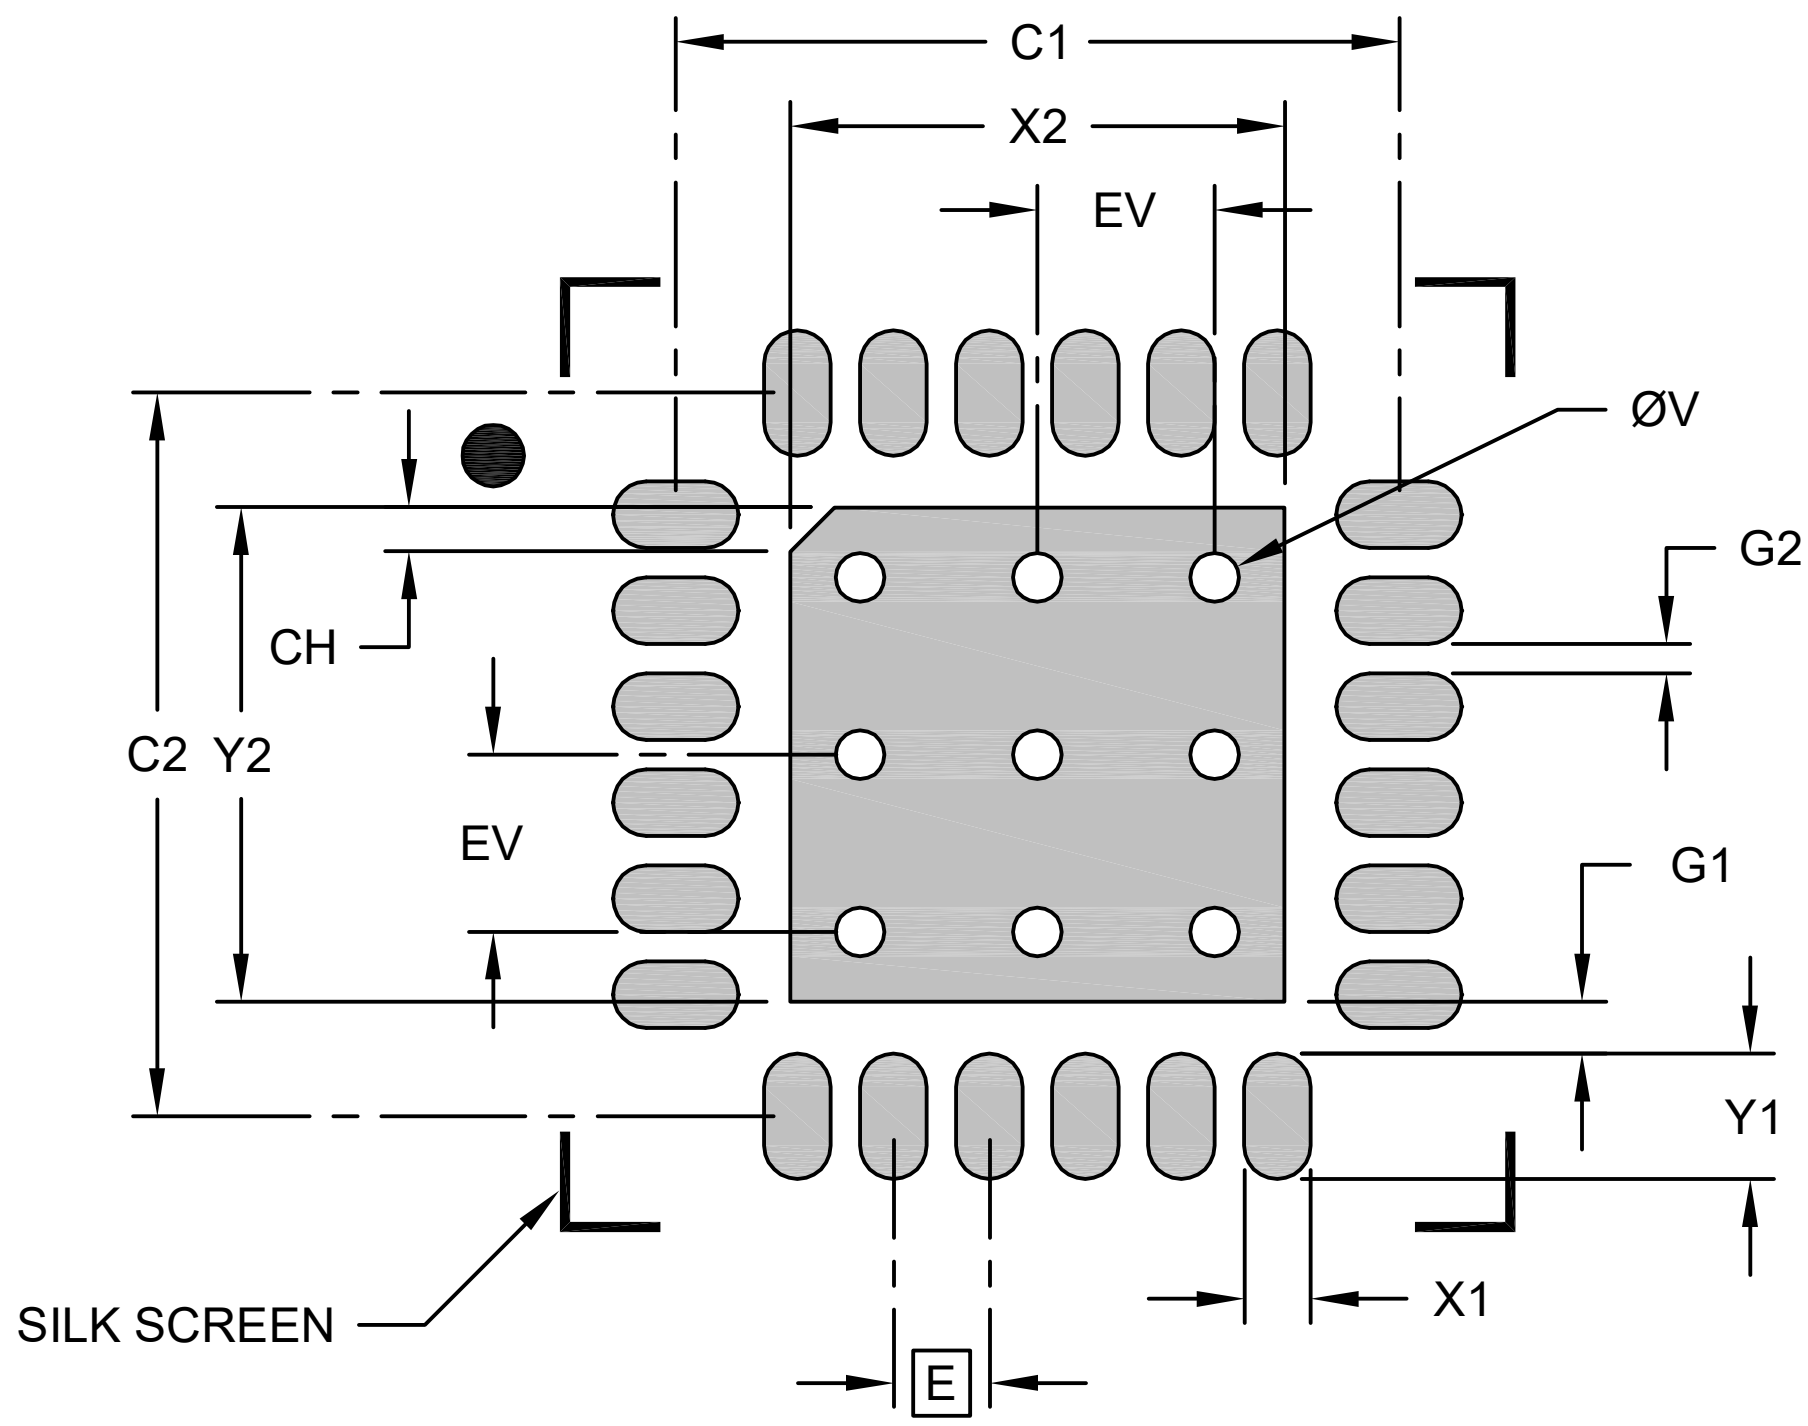

RECOMMENDED LAND PATTERN

		Units	MILLIMETERS		
		Dimension Limits	MIN	NOM	MAX
Contact Pitch	E			0.65 BSC	
Center Pad Width	X2				3.35
Center Pad Length	Y2				3.35
Contact Pad Spacing	C1			4.90	
Contact Pad Spacing	C2			4.90	
Contact Pad Width (Xnn)	X1				0.45
Contact Pad Length (Xnn)	Y1				0.85
Index Corner Chamfer	CH			0.30	
Contact Pad to Center Pad (Xnn)	G1		0.35		
Contact Pad to Contact Pad (Xnn)	G2		0.20		
Thermal Via Diameter	V			0.33	
Thermal Via Pitch	EV			1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2525 Rev A