28-Lead Very-Thin Quad Flat No-Lead Package (ML) - 6x6x1.0 mm Body [VQFN] With 4.10x4.10mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

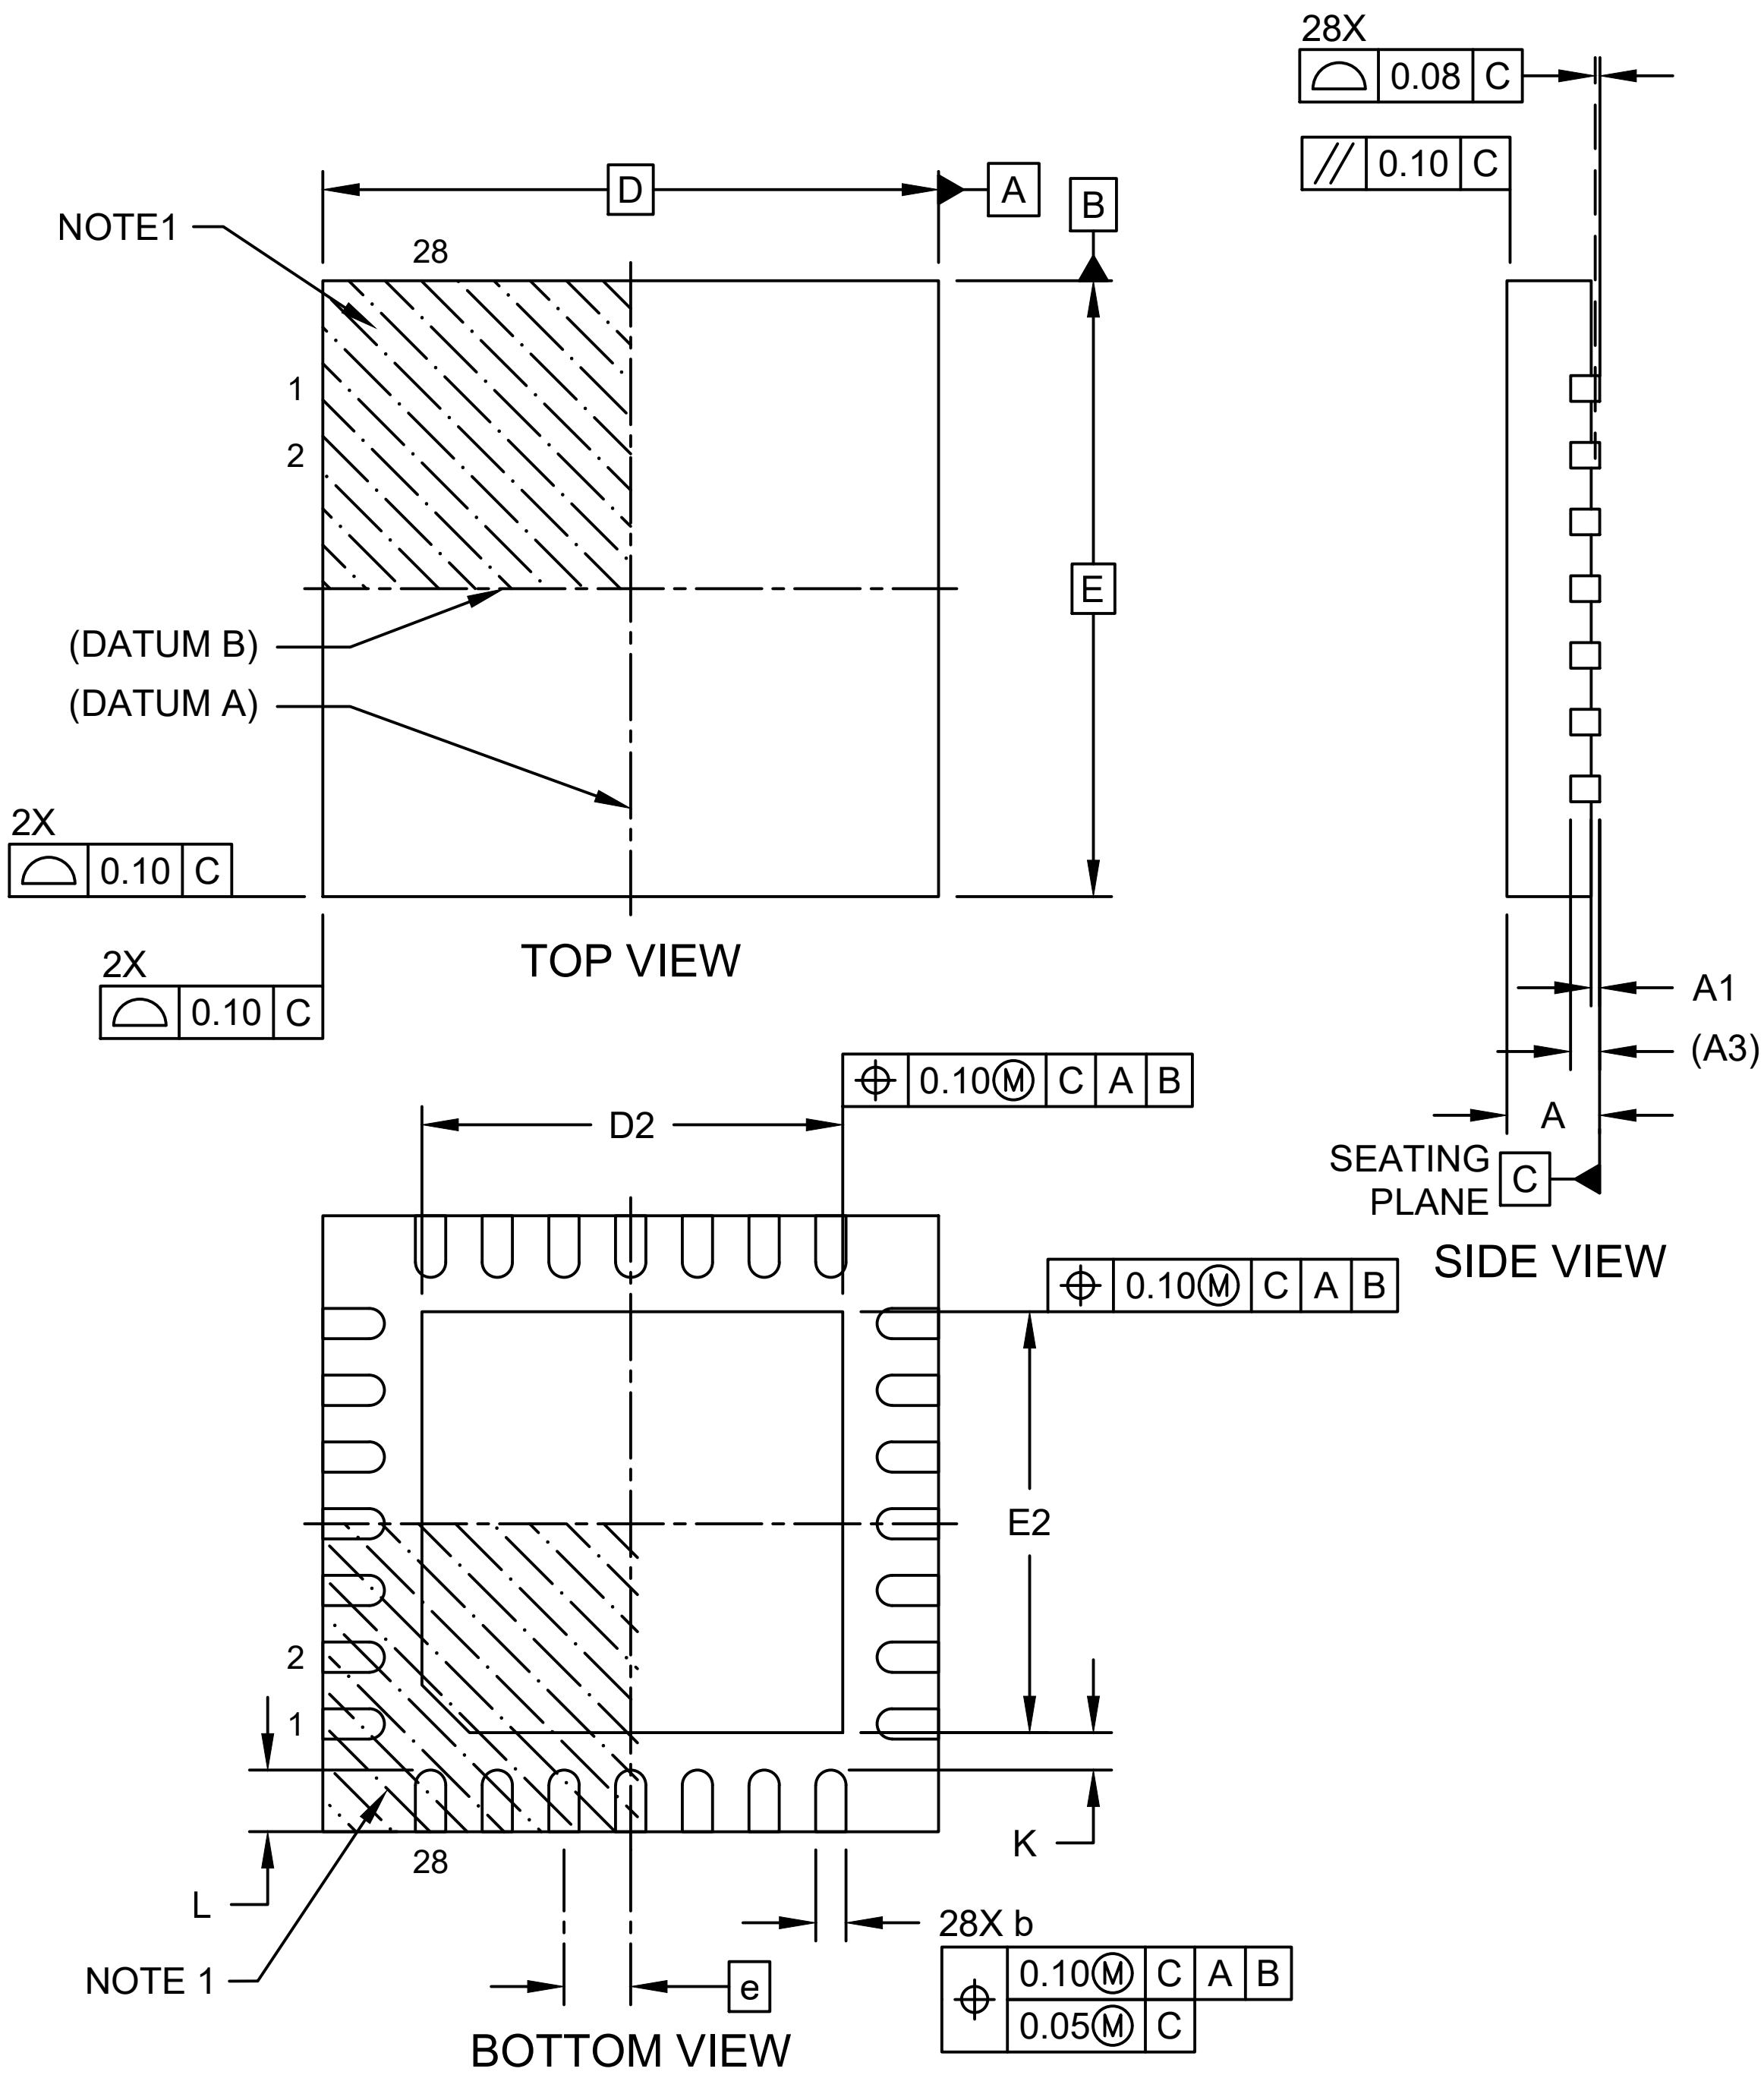

Microchip Technology Drawing C04-00105-ML Rev D Sheet 1 of 2

28-Lead Very-Thin Quad Flat No-Lead Package (ML) - 6x6x1.0 mm Body [VQFN] With 4.10x4.10mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

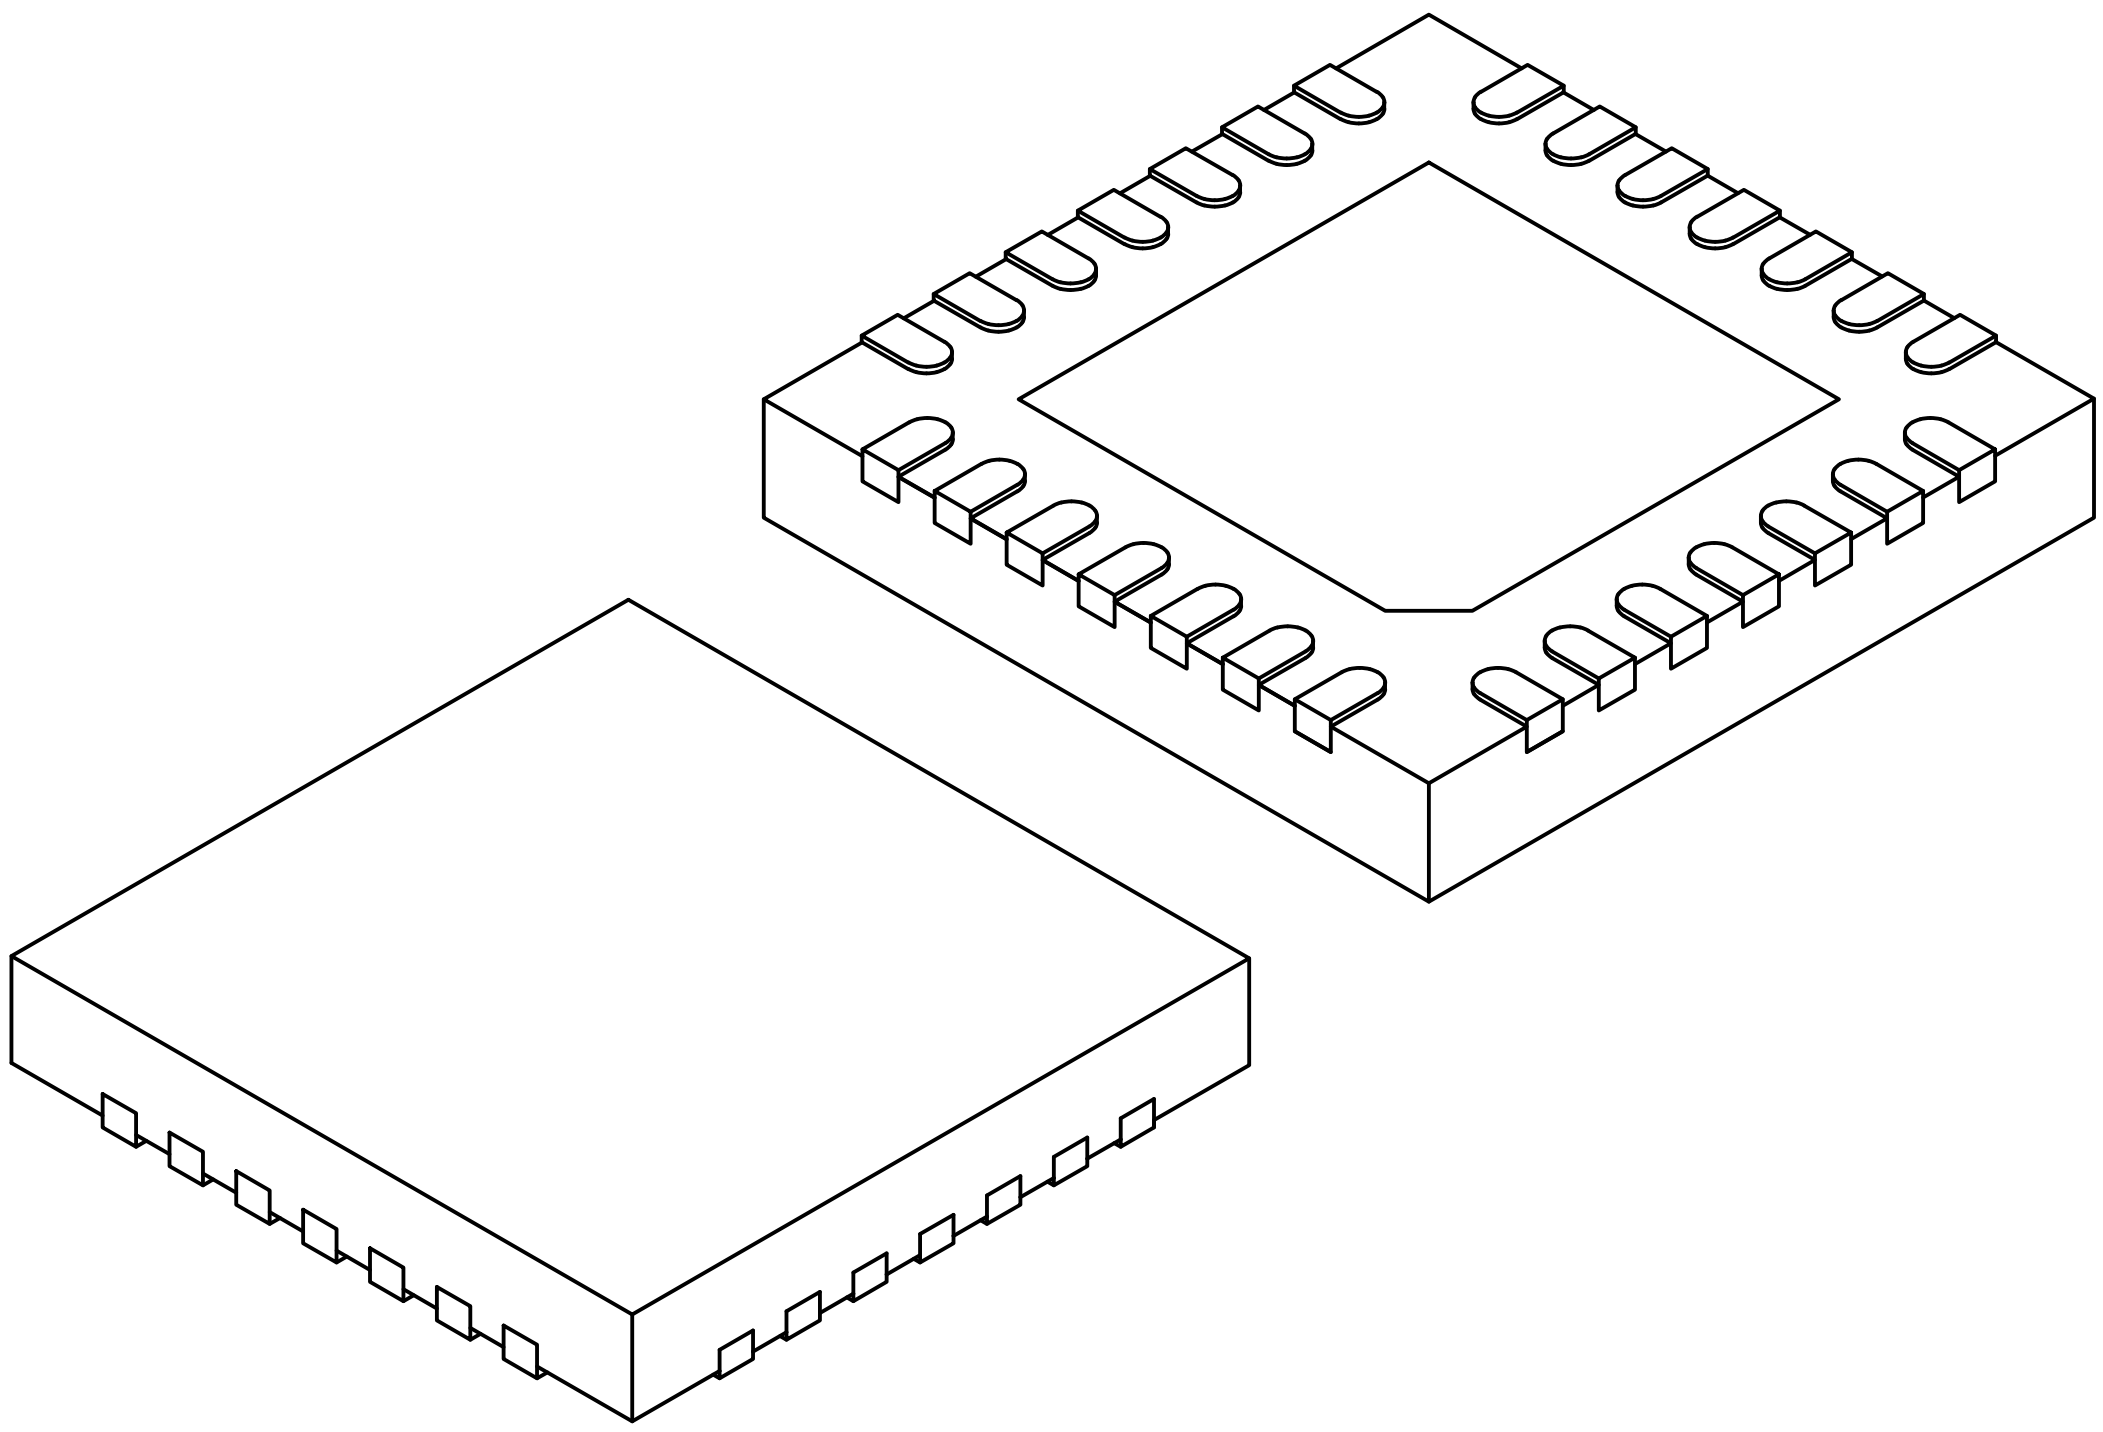

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N		28	
Pitch	e		0.65 BSC	
Overall Height	A	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF	
Overall Width	E		6.00 BSC	
Exposed Pad Width	E2	4.00	4.10	4.20
Overall Length	D		6.00 BSC	
Exposed Pad Length	D2	4.00	4.10	4.20
Terminal Width	b	0.23	0.30	0.35
Terminal Length	L	0.50	0.60	0.70
Terminal-to-Exposed Pad	K	0.20	-	-

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M.
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00105-ML Rev D Sheet 2 of 2

28-Lead Very-Thin Quad Flat No-Lead Package (ML) - 6x6x1.0 mm Body [VQFN] With 4.10x4.10mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

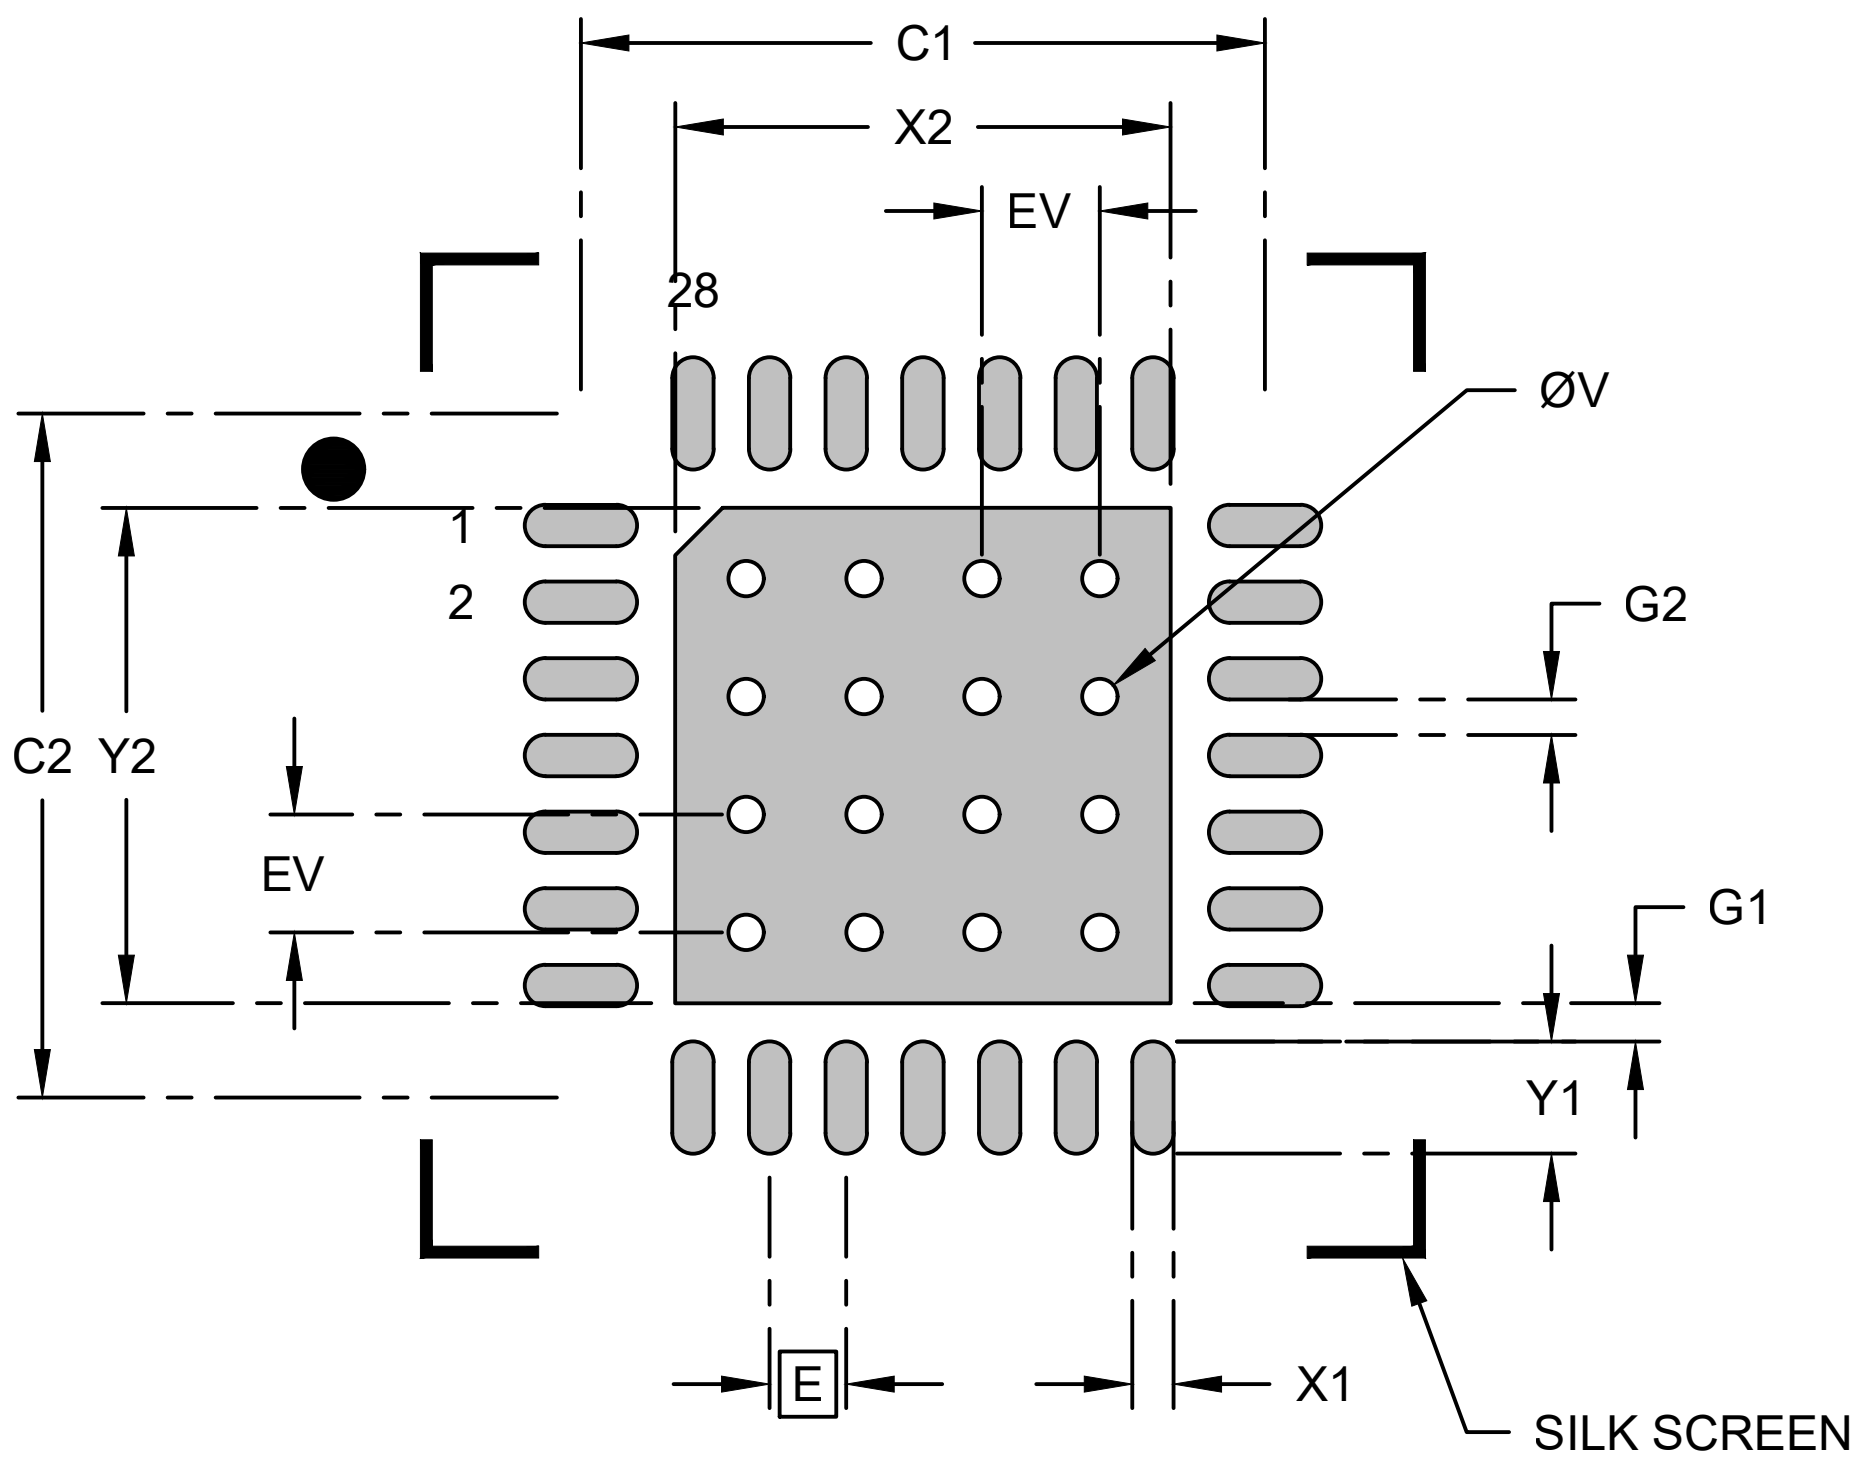

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Center Pad Width	X2			4.20
Center Pad Length	Y2			4.20
Contact Pad Spacing	C1		5.80	
Contact Pad Spacing	C2		5.80	
Contact Pad Width (Xnn)	X1			0.35
Contact Pad Length (Xnn)	Y1			0.95
Contact Pad to Center Pad (X28)	G1	0.33		
Contact Pad to Contact Pad (X24)	G2	0.30		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, pleease refer to current industry standard IPC-7093.

Microchip Technology Drawing C04-02105-ML Rev D

28-Lead Very-Thin Quad Flat No-Lead Package (M4X) - 6x6x1.0 mm Body [VQFN]
With 4.10x4.10mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

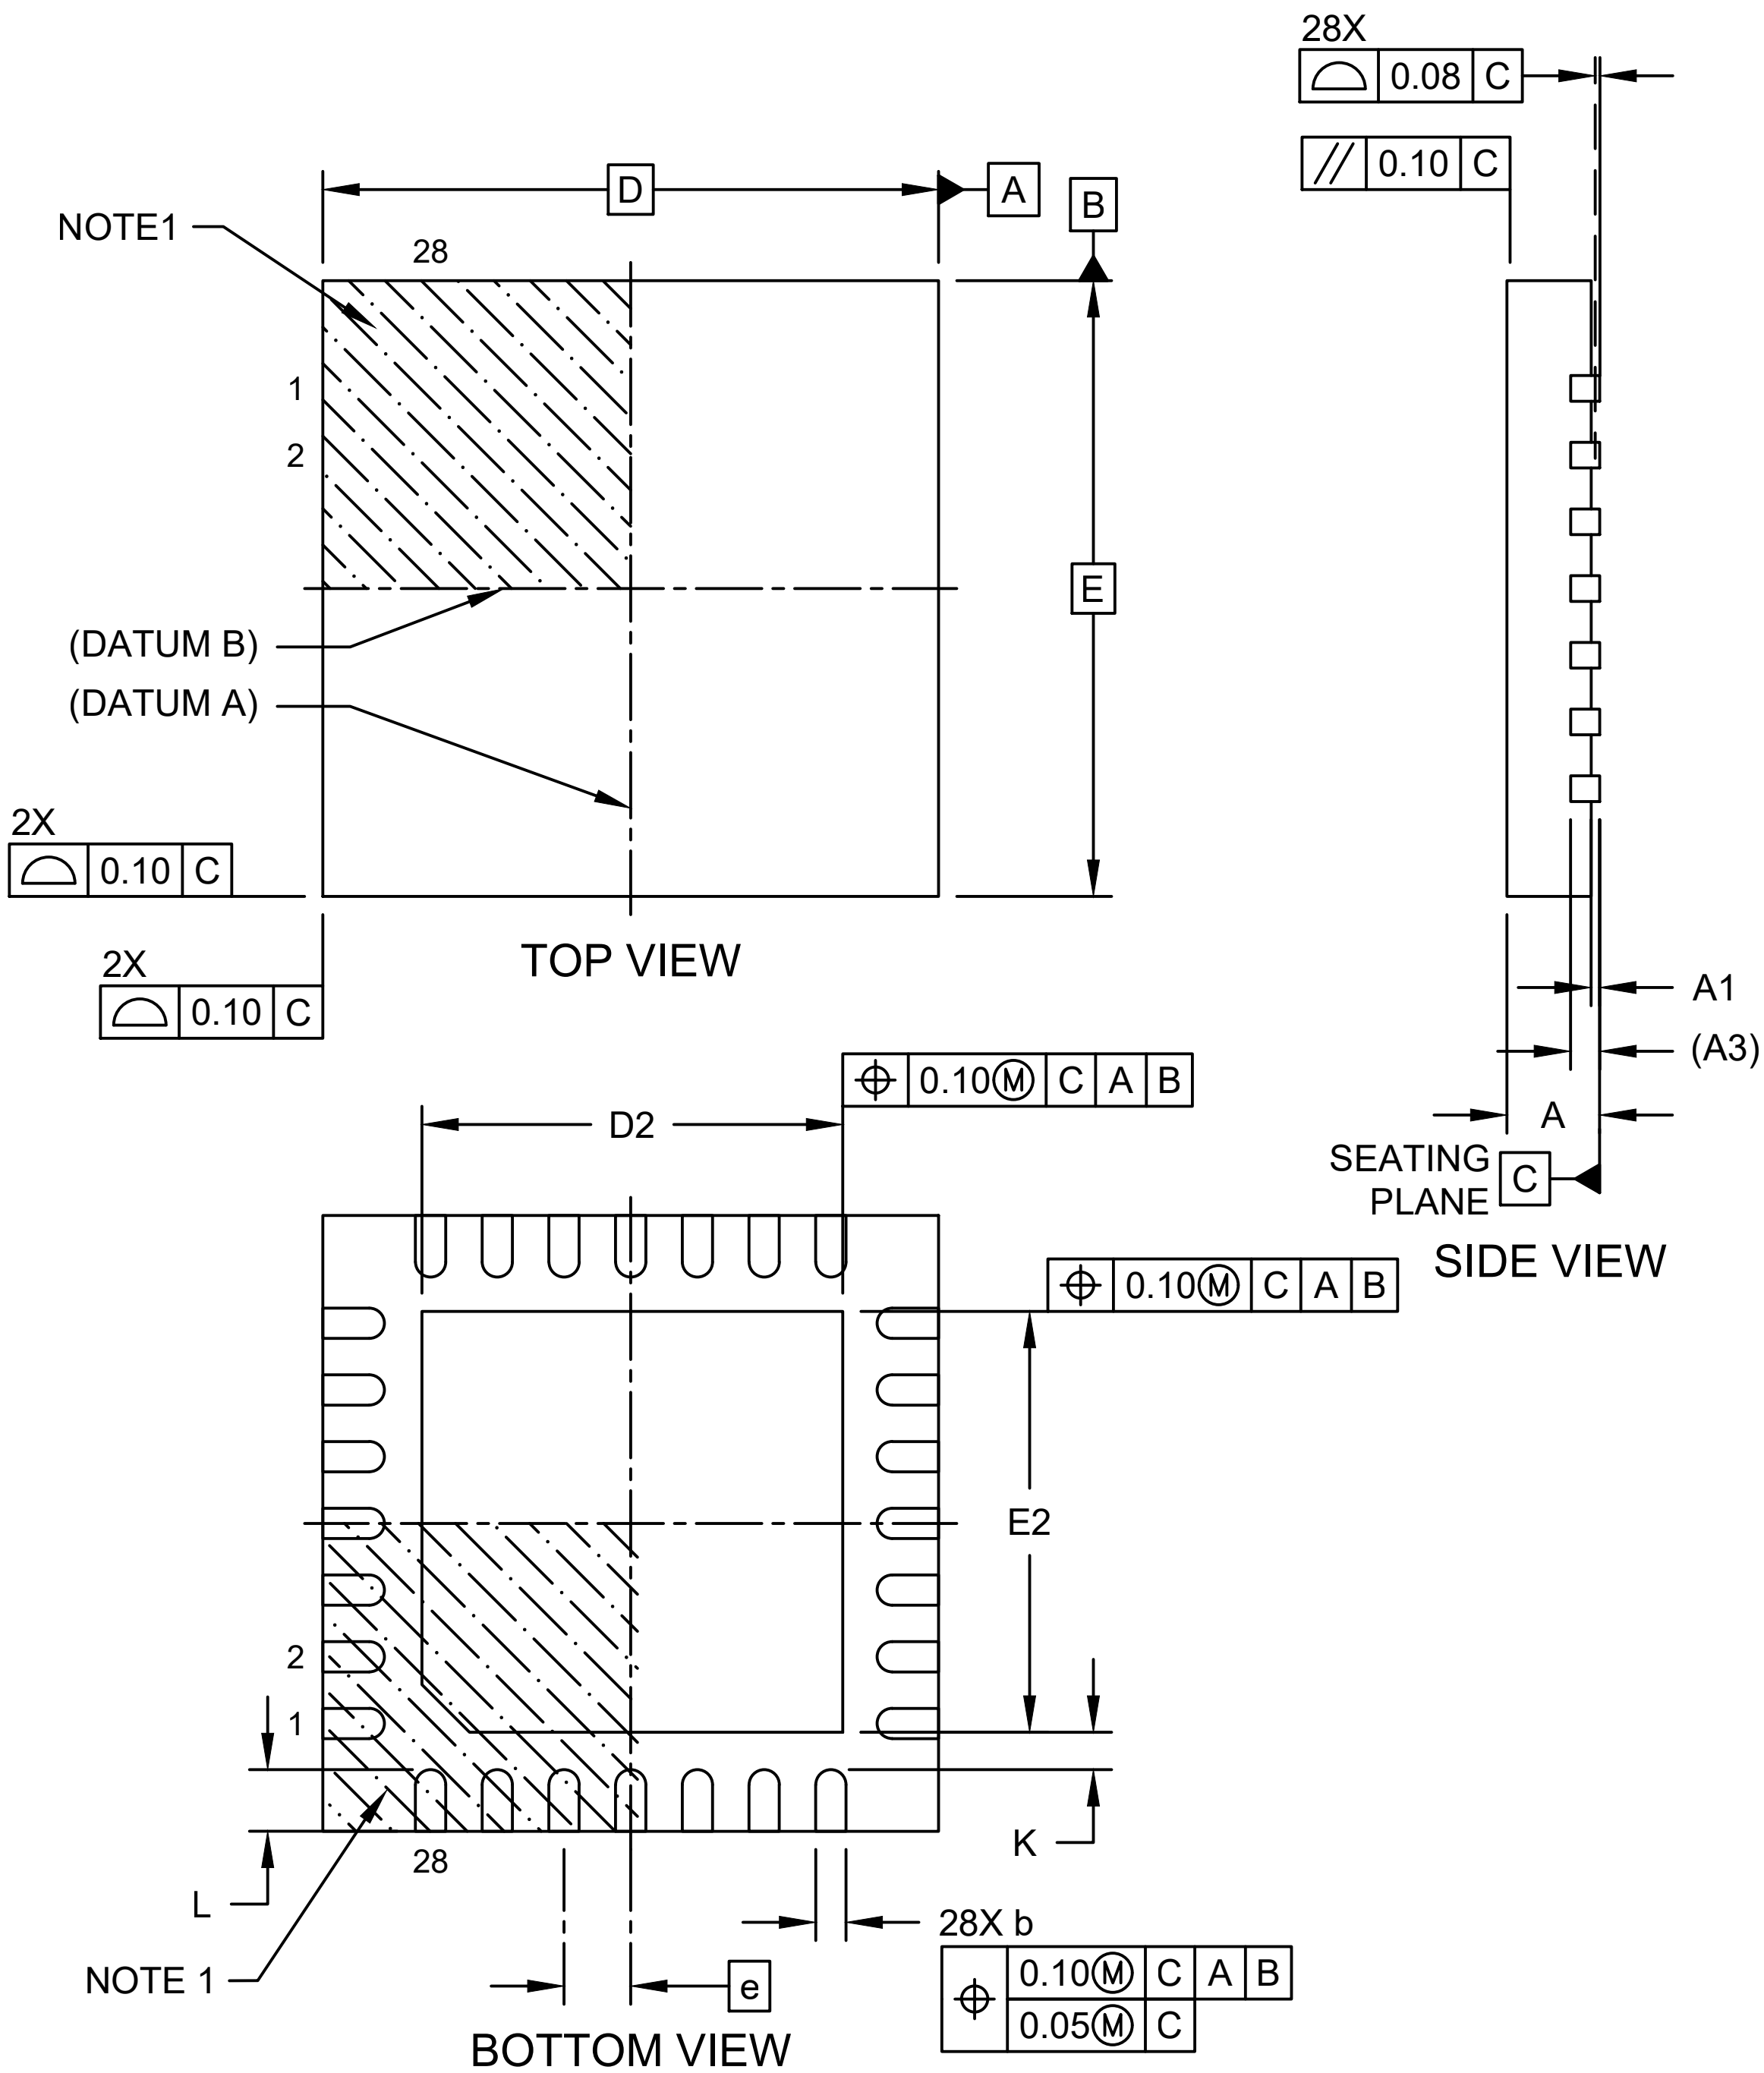

Microchip Technology Drawing C04-00105-M4X Rev D Sheet 1 of 2

28-Lead Very-Thin Quad Flat No-Lead Package (M4X) - 6x6x1.0 mm Body [VQFN] With 4.10x4.10mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

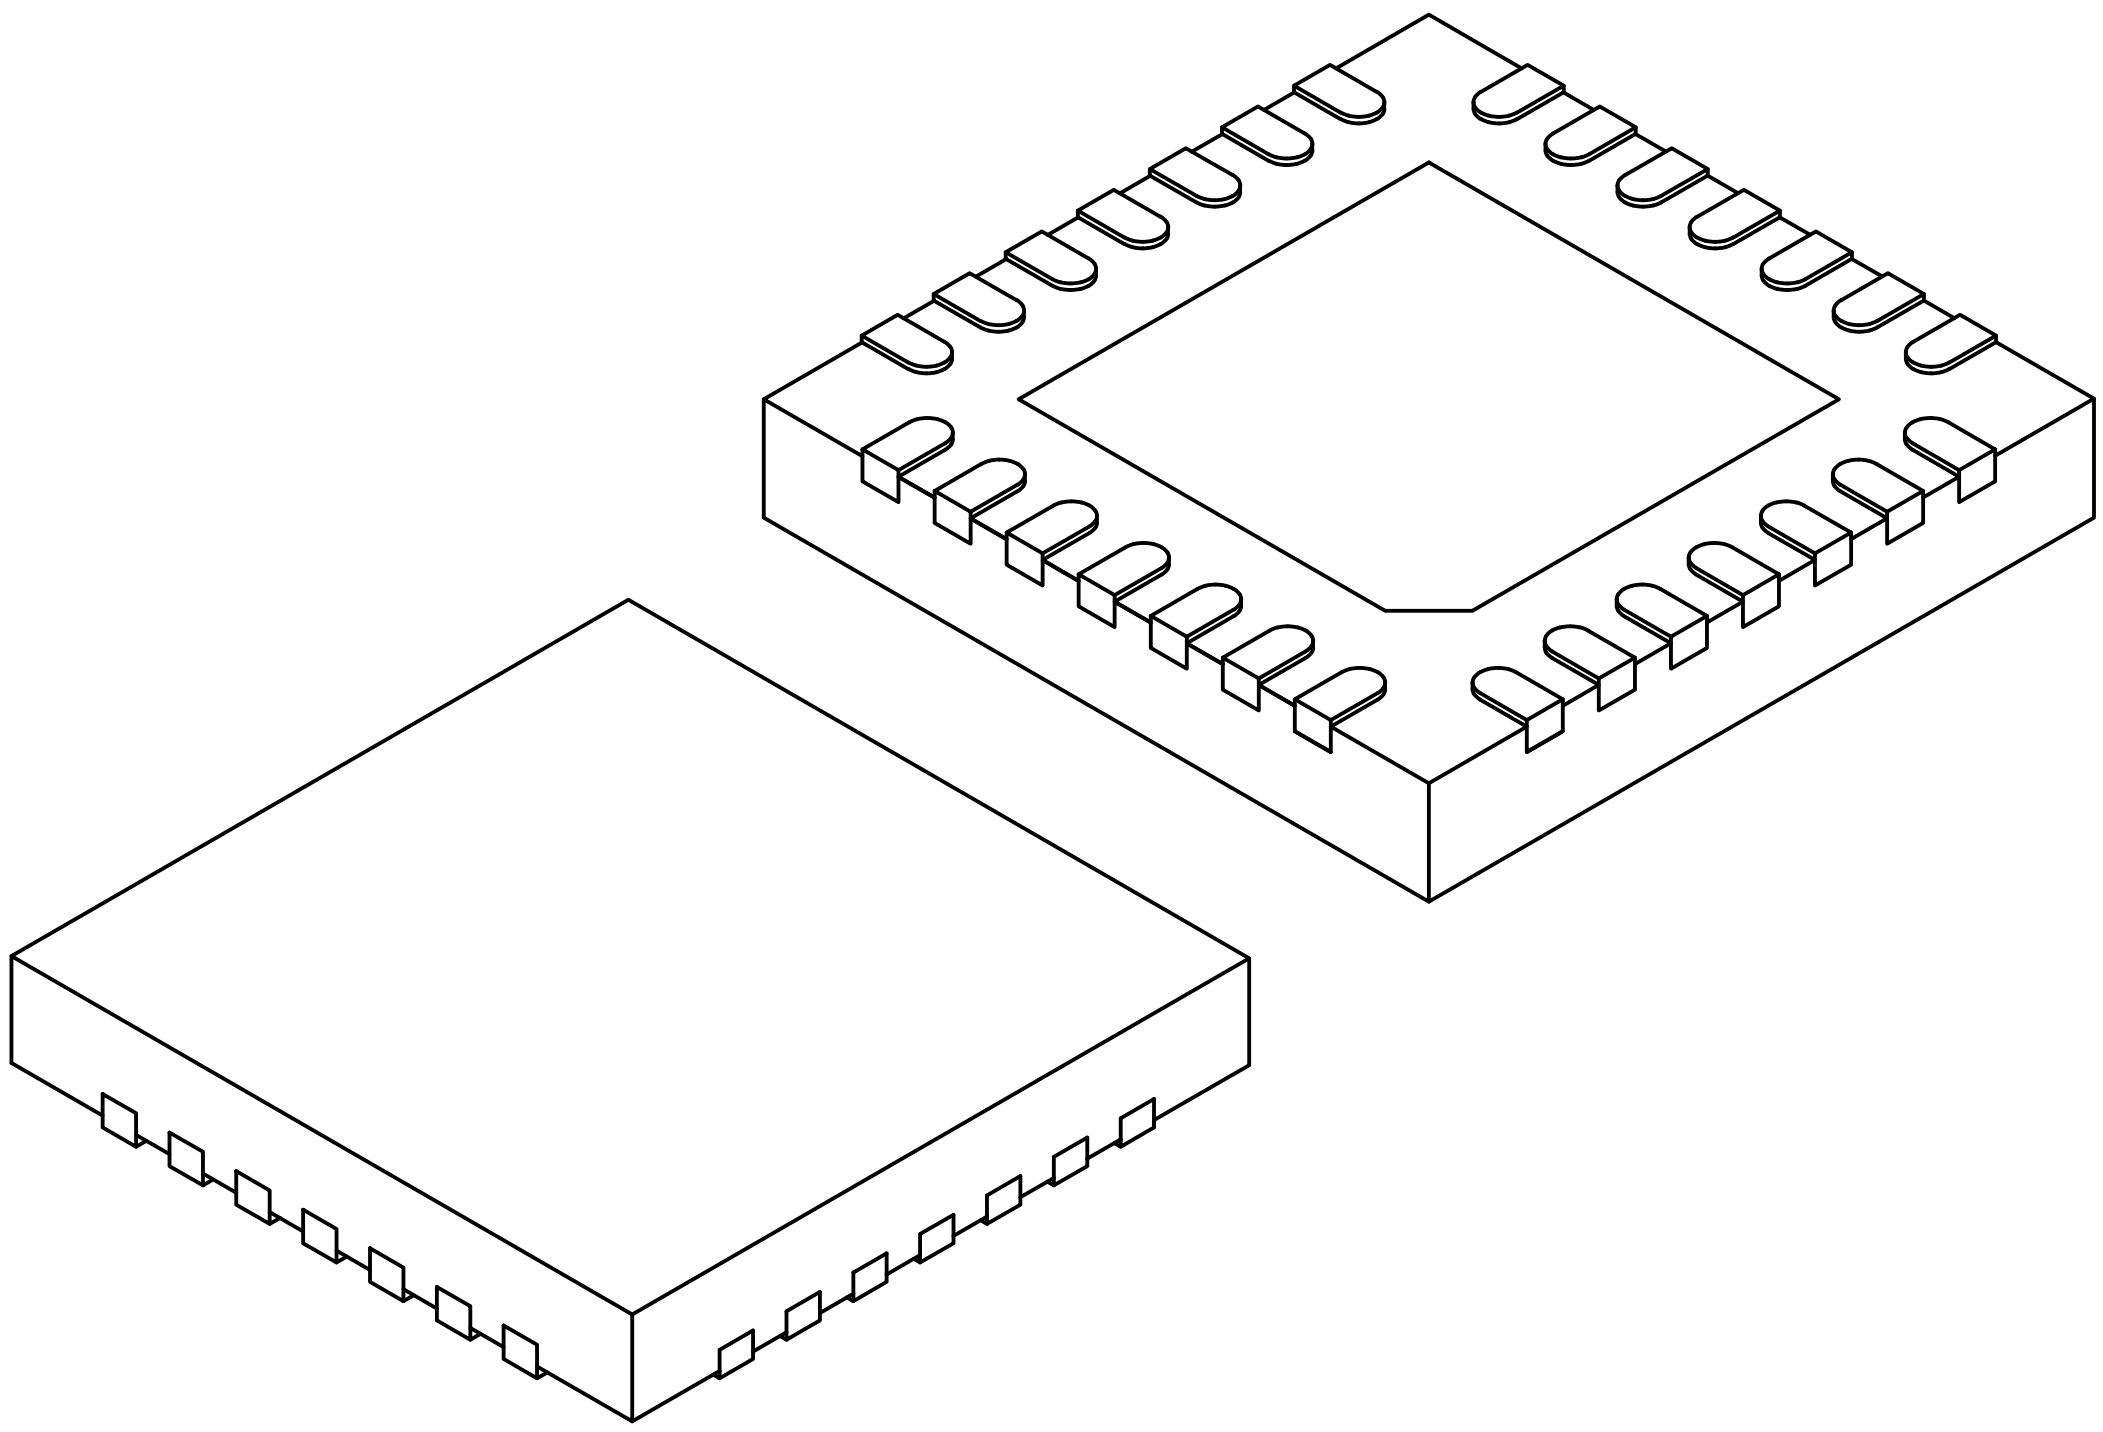

Units		MILLIMETERS		
Dimension	Limits	MIN	NOM	MAX
Number of Pins	N		28	
Pitch	e		0.65 BSC	
Overall Height	A	0.80	0.90	1.00
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF	
Overall Width	E		6.00 BSC	
Exposed Pad Width	E2	4.00	4.10	4.20
Overall Length	D		6.00 BSC	
Exposed Pad Length	D2	4.00	4.10	4.20
Terminal Width	b	0.23	0.30	0.35
Terminal Length	L	0.50	0.60	0.70
Terminal-to-Exposed Pad	K	0.20	-	-

Notes:
1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M.
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00105-M4X Rev D Sheet 2 of 2

28-Lead Very-Thin Quad Flat No-Lead Package (M4X) - 6x6x1.0 mm Body [VQFN] With 4.10x4.10mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

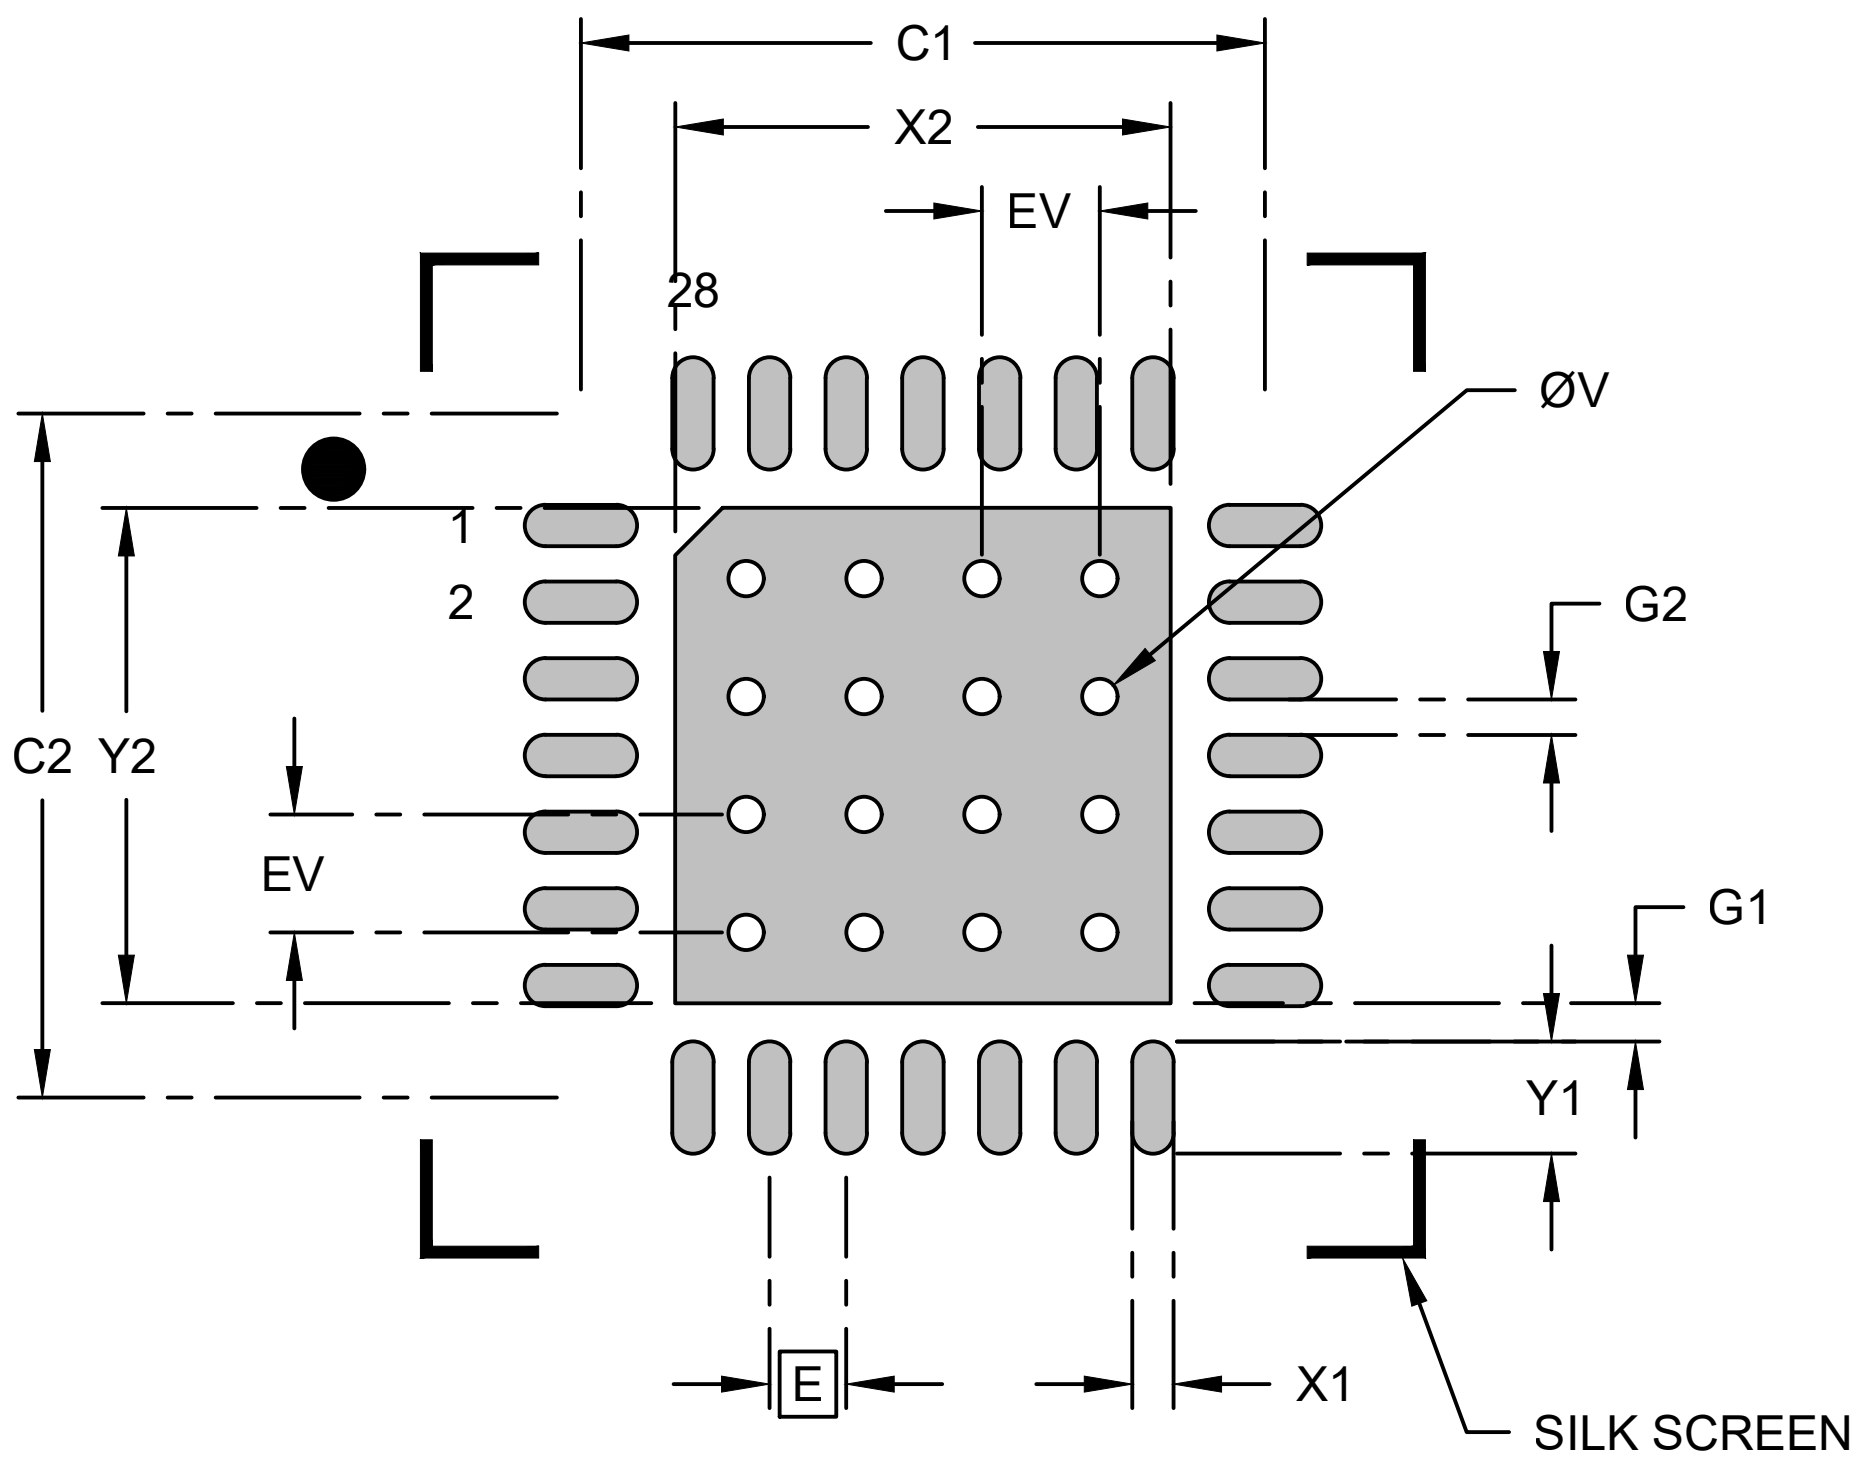

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Center Pad Width	X2			4.20
Center Pad Length	Y2			4.20
Contact Pad Spacing	C1		5.80	
Contact Pad Spacing	C2		5.80	
Contact Pad Width (Xnn)	X1			0.35
Contact Pad Length (Xnn)	Y1			0.95
Contact Pad to Center Pad (X28)	G1	0.33		
Contact Pad to Contact Pad (X24)	G2	0.30		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, pleease refer to current industry standard IPC-7093.

Microchip Technology Drawing C04-02105-M4X Rev D