2-Lead Extra-Thin Dual Flatpack, No Lead Package (QGB) - 2x1.5x0.4 mm Body [XDFN]; Atmel Legacy GPC YMG

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

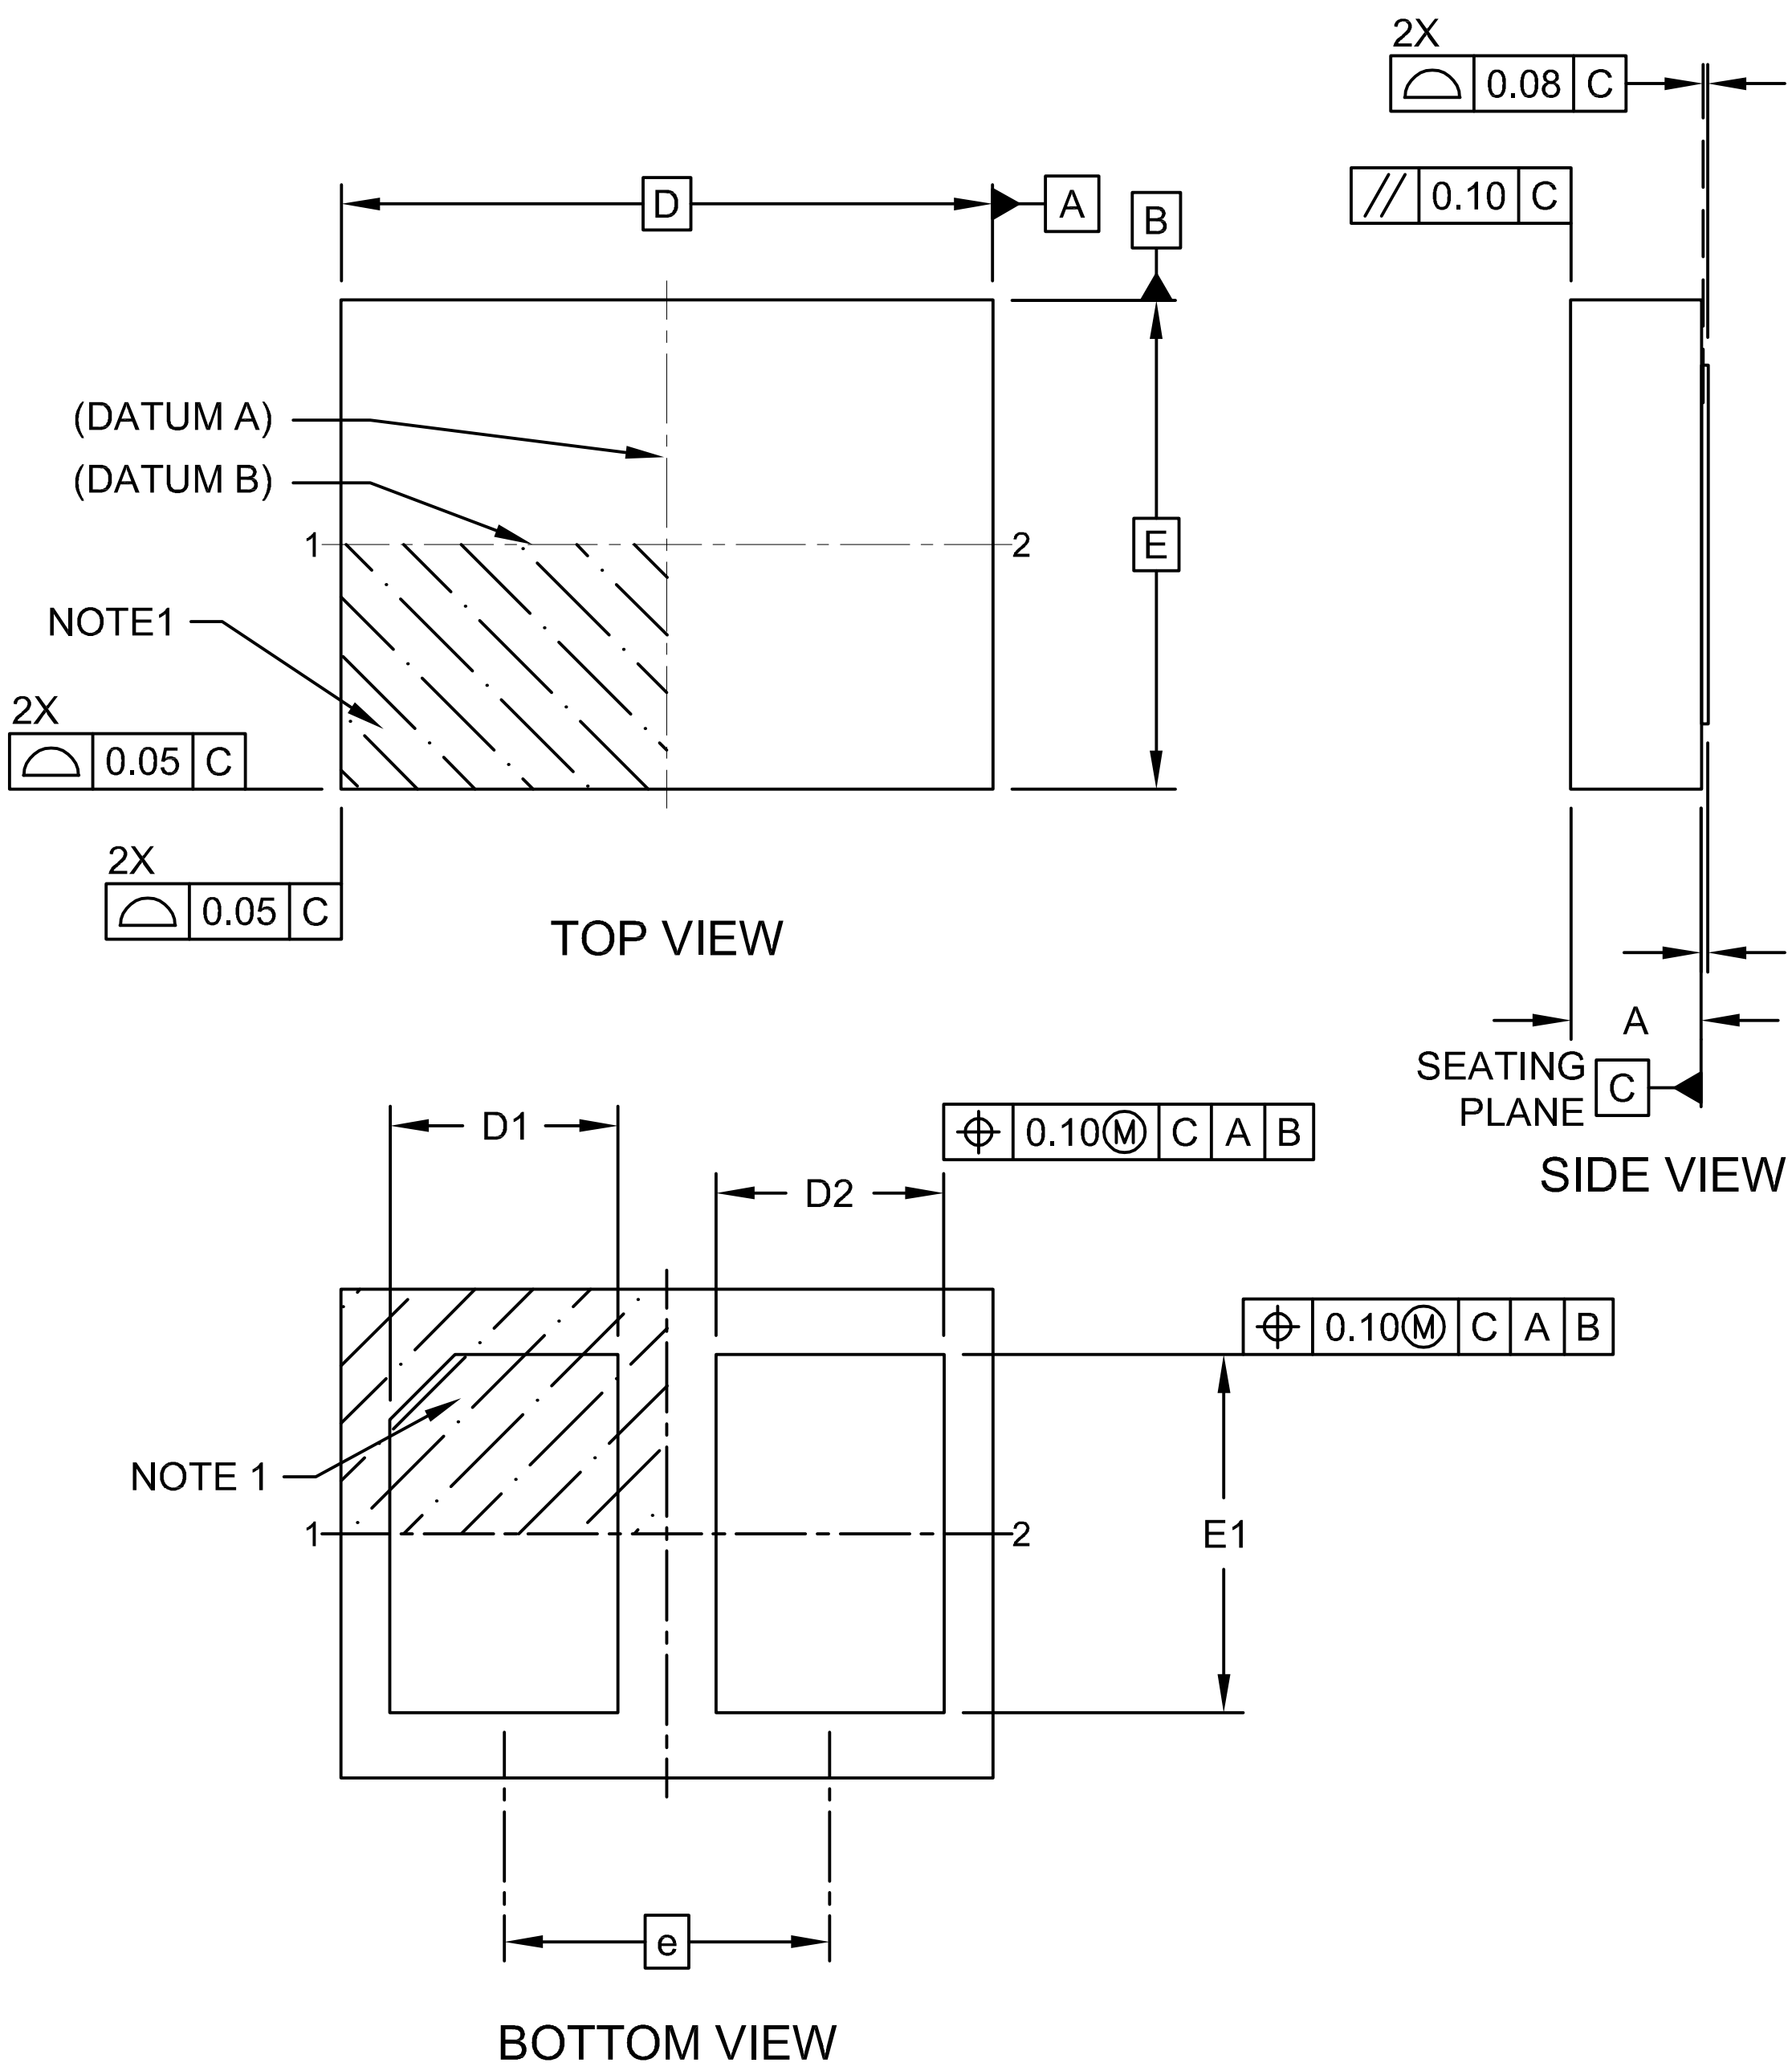

2-Lead Extra-Thin Dual Flatpack, No Lead Package (QGB) - 2x1.5x0.4 mm Body [XDFN]; Atmel Legacy GPC YMG

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

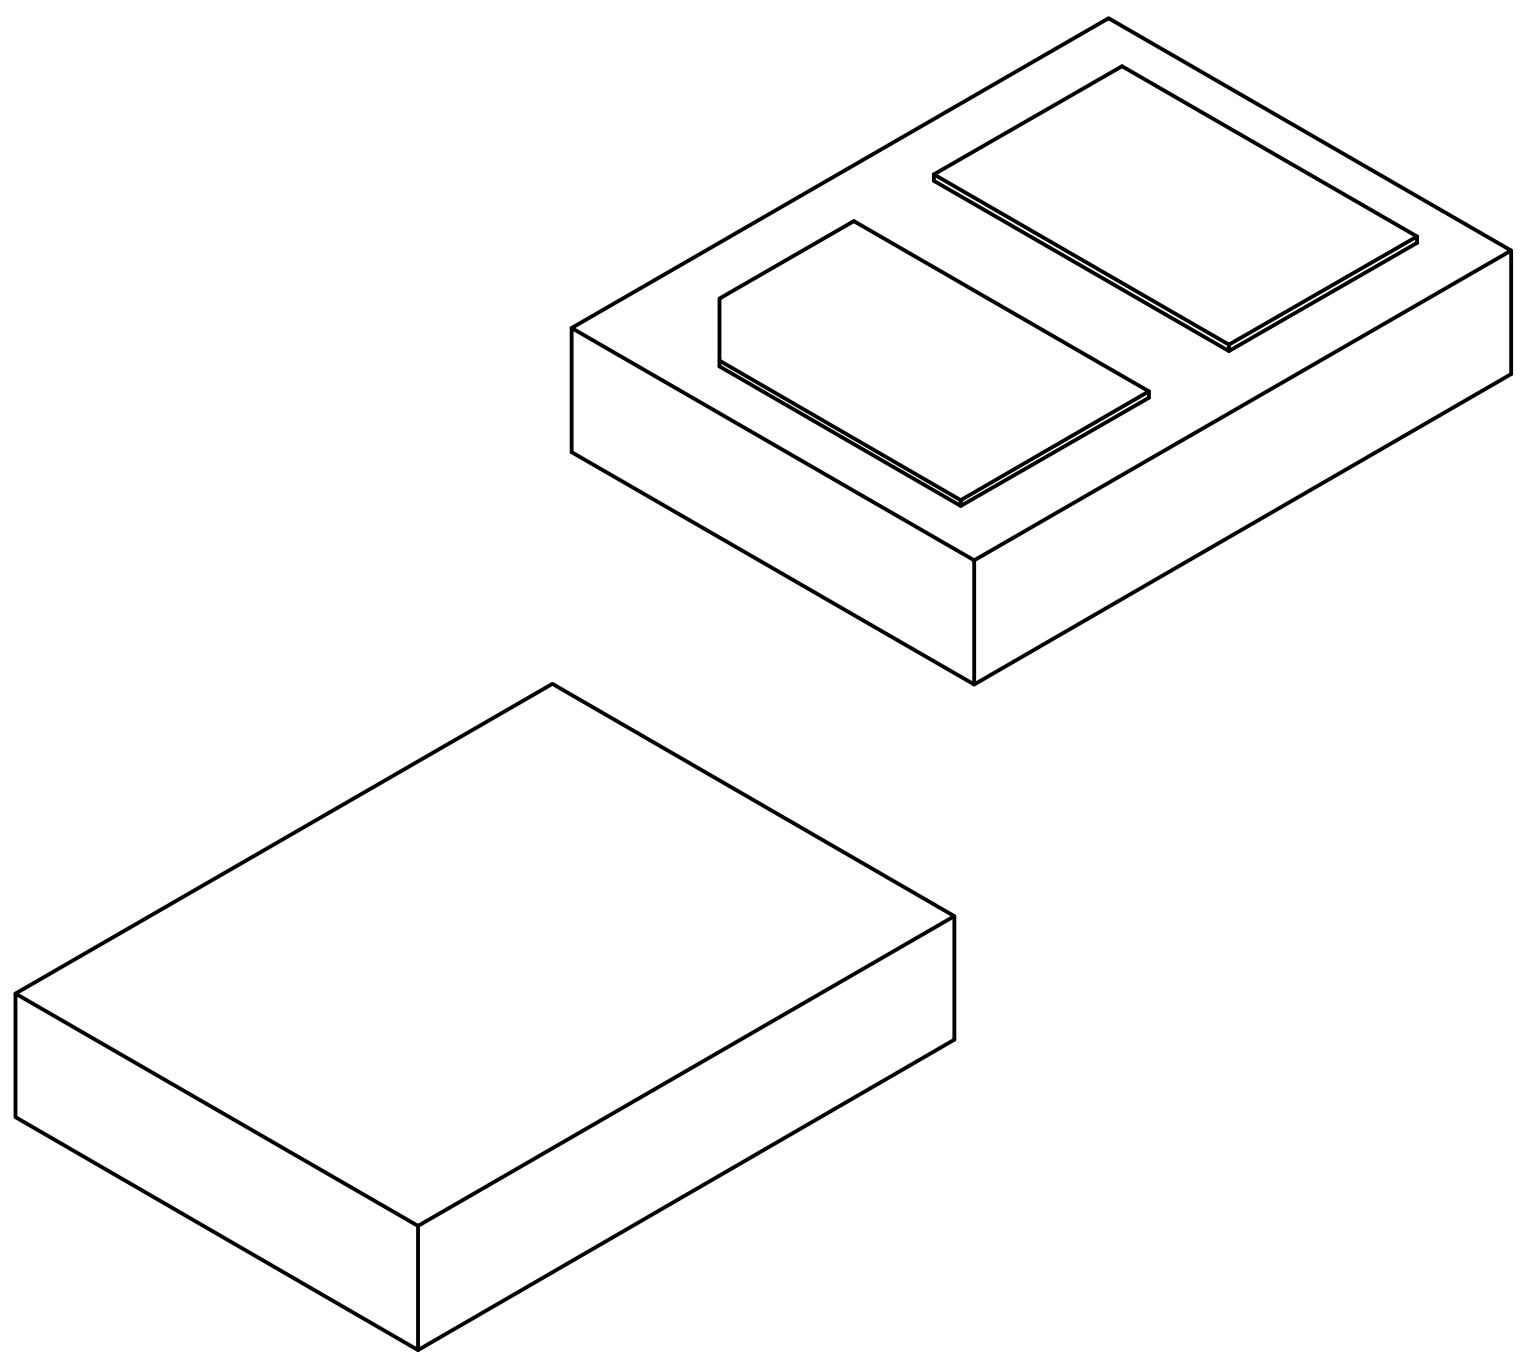

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		2	
Pitch	e		1.0 BSC	
Overall Height	A	0.32	0.37	0.40
Standoff	A1	-	0.10	-
Overall Length	D		2.00 BSC	
Exposed Pad Length	D1	0.60	0.70	0.80
Exposed Pad Length	D2	0.60	0.70	0.80
Overall Width	E		1.50 BSC	
Exposed Pad Width	E1	1.00	1.10	1.20

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-21366 Rev A Sheet 2 of 2

2-Lead Extra-Thin Dual Flatpack, No Lead Package (QGB) - 2x1.5x0.4 mm Body [XDFN]; Atmel Legacy GPC YMG

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

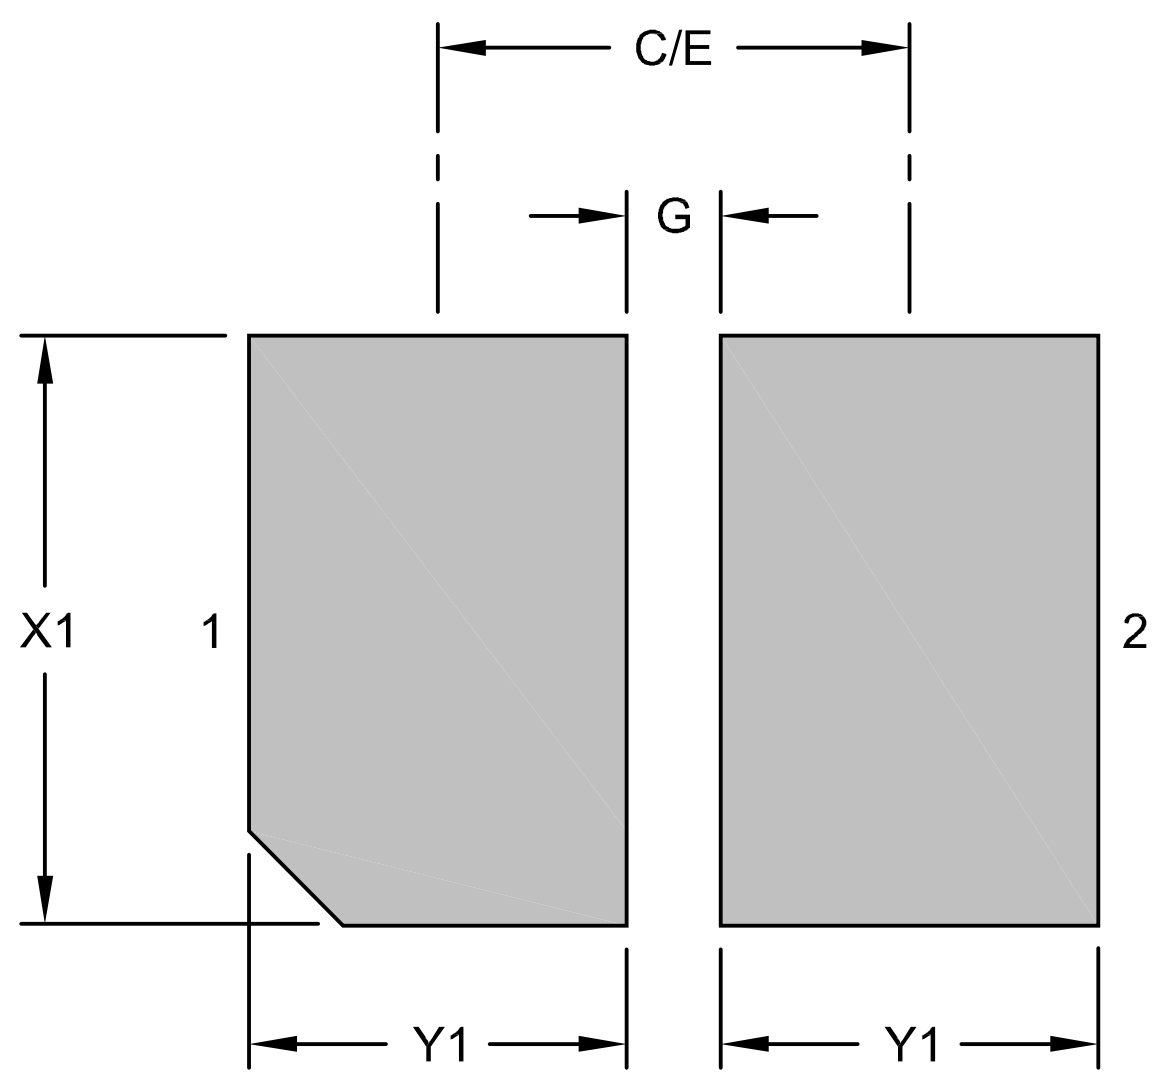

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	1.00 BSC		
Contact Pad Spacing	C		1.00	
Contact Pad Width (X02)	X1			1.25
Contact Pad Length (X02)	Y1			0.80
Contact Pad to Contact Pad (X02)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-23366 Rev A