8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MCA) - 1.2x1.2x0.6 mm Body [UQFN] With 0.40 mm Fused Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

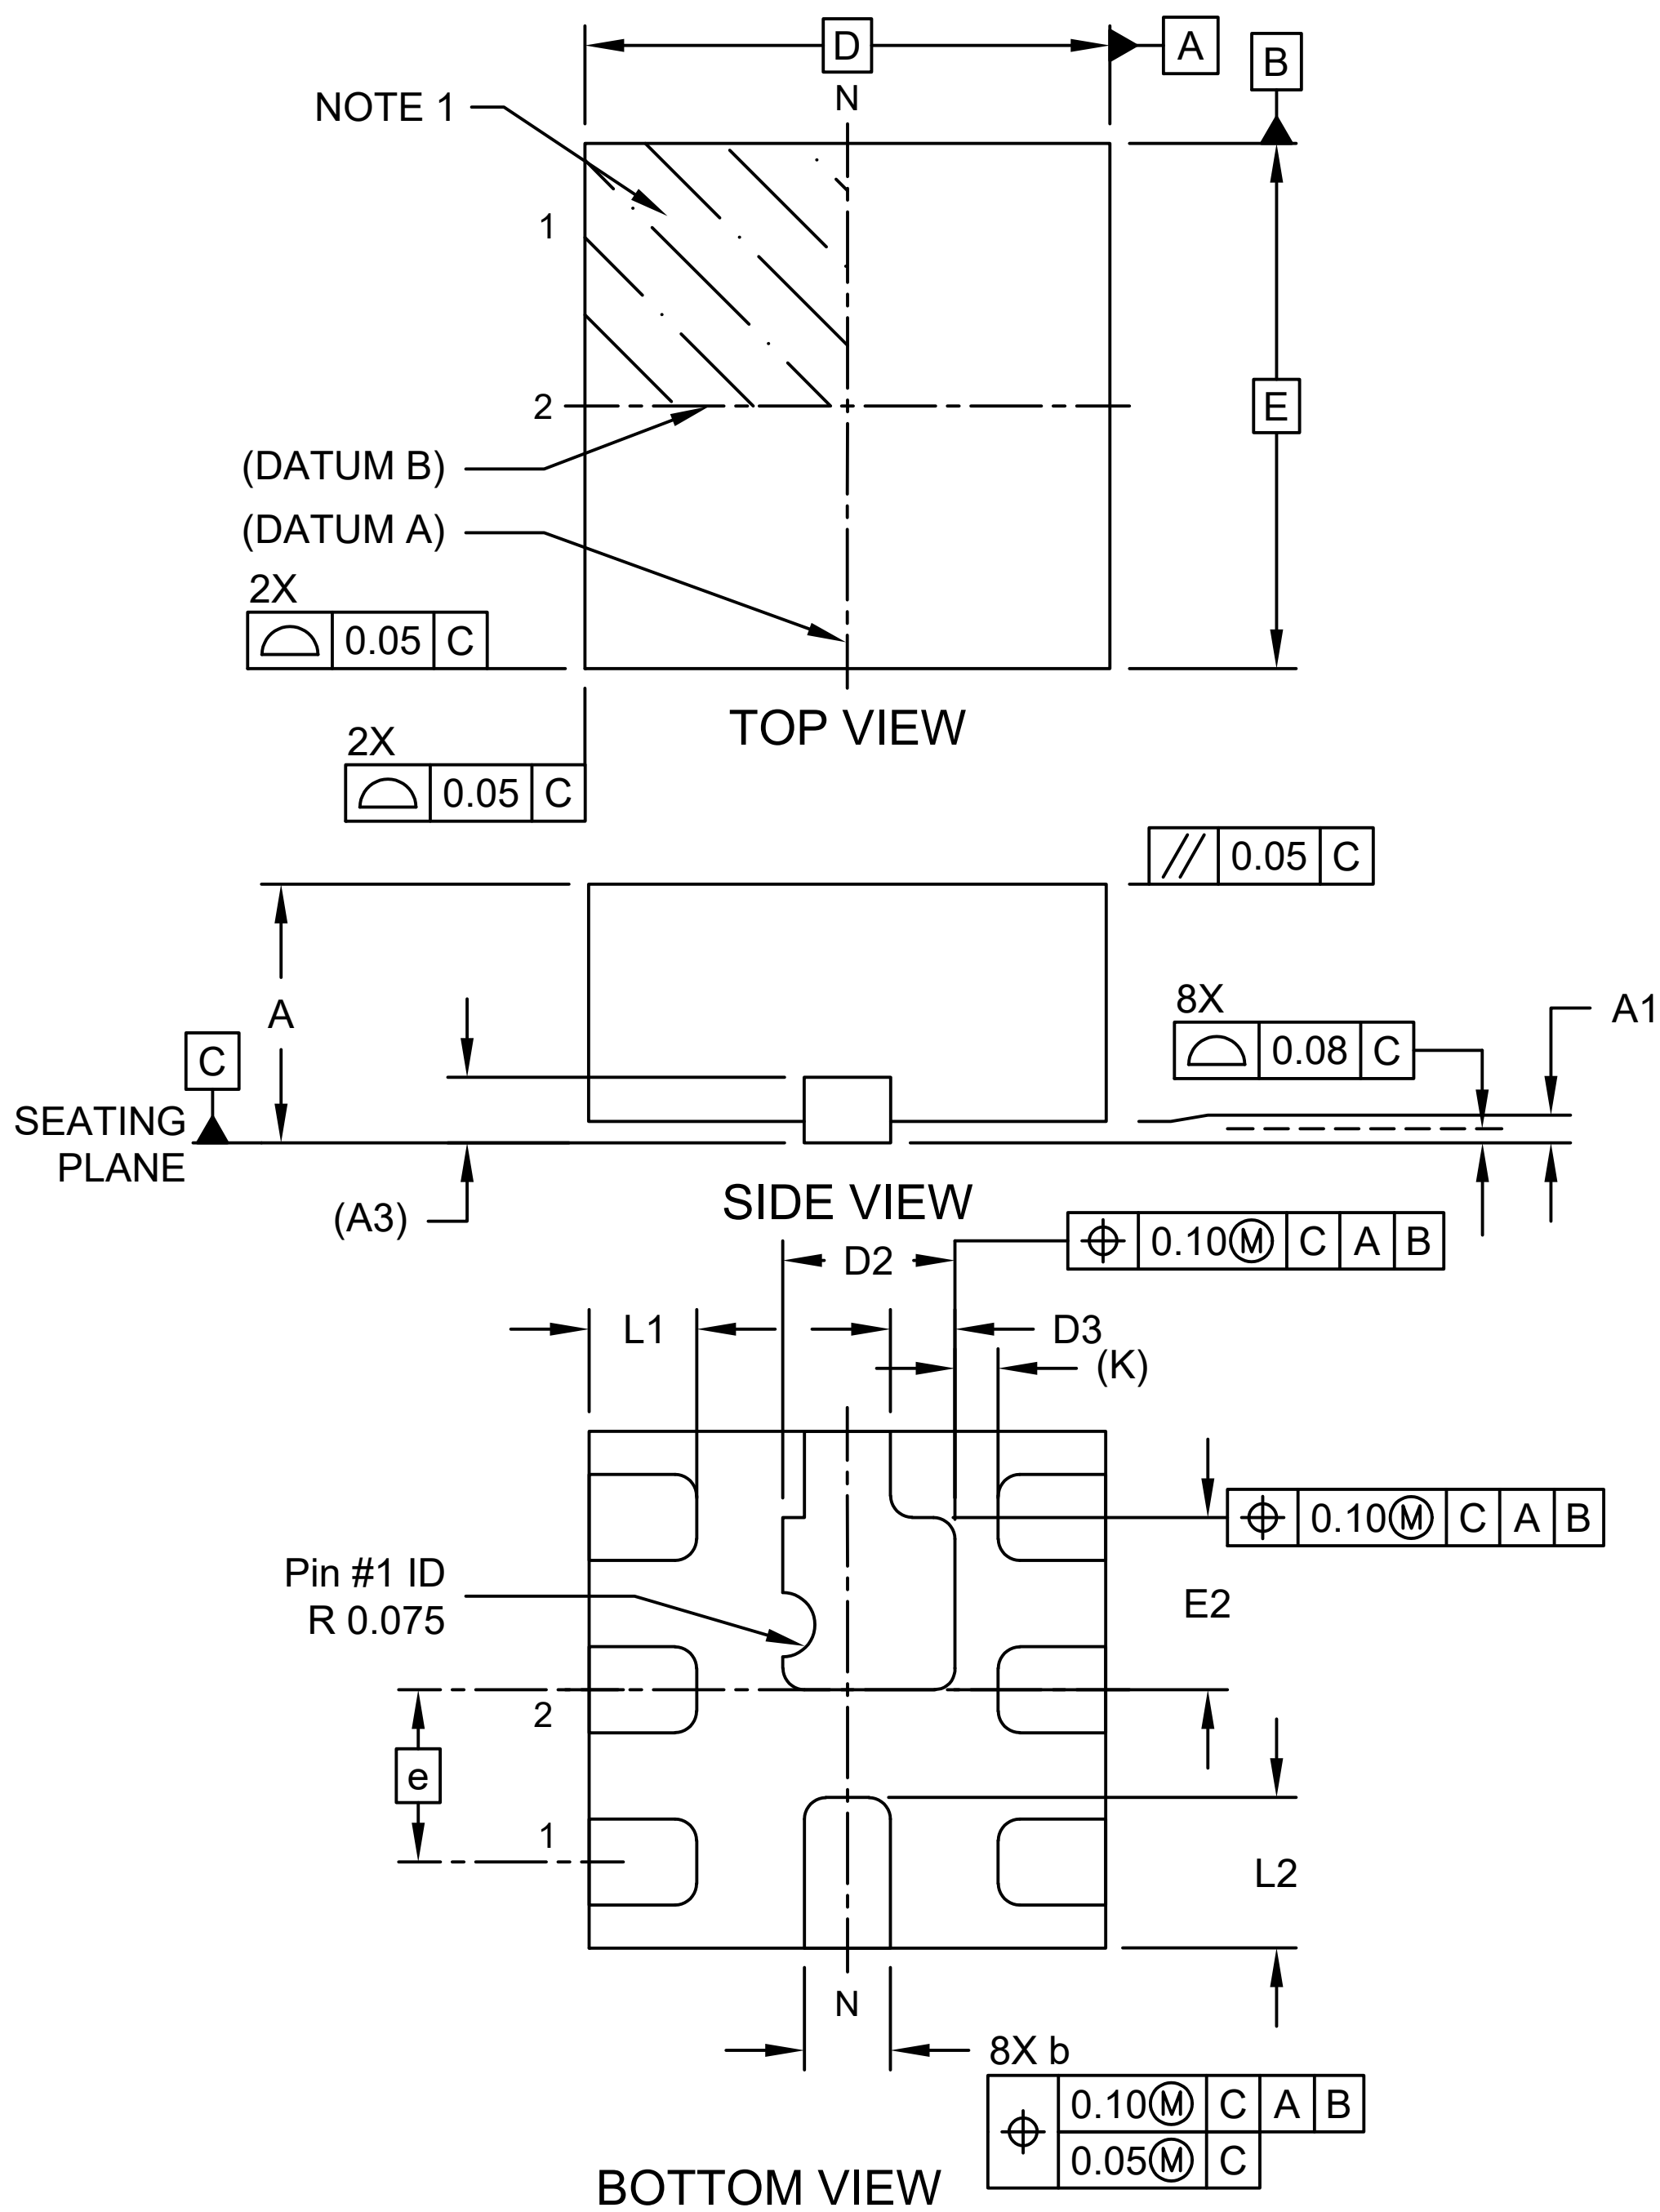

Microchip Technology Drawing C04-1171 Rev A Sheet 1 of 2

8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MCA) - 1.2x1.2x0.6 mm Body [UQFN] With 0.40 mm Fused Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

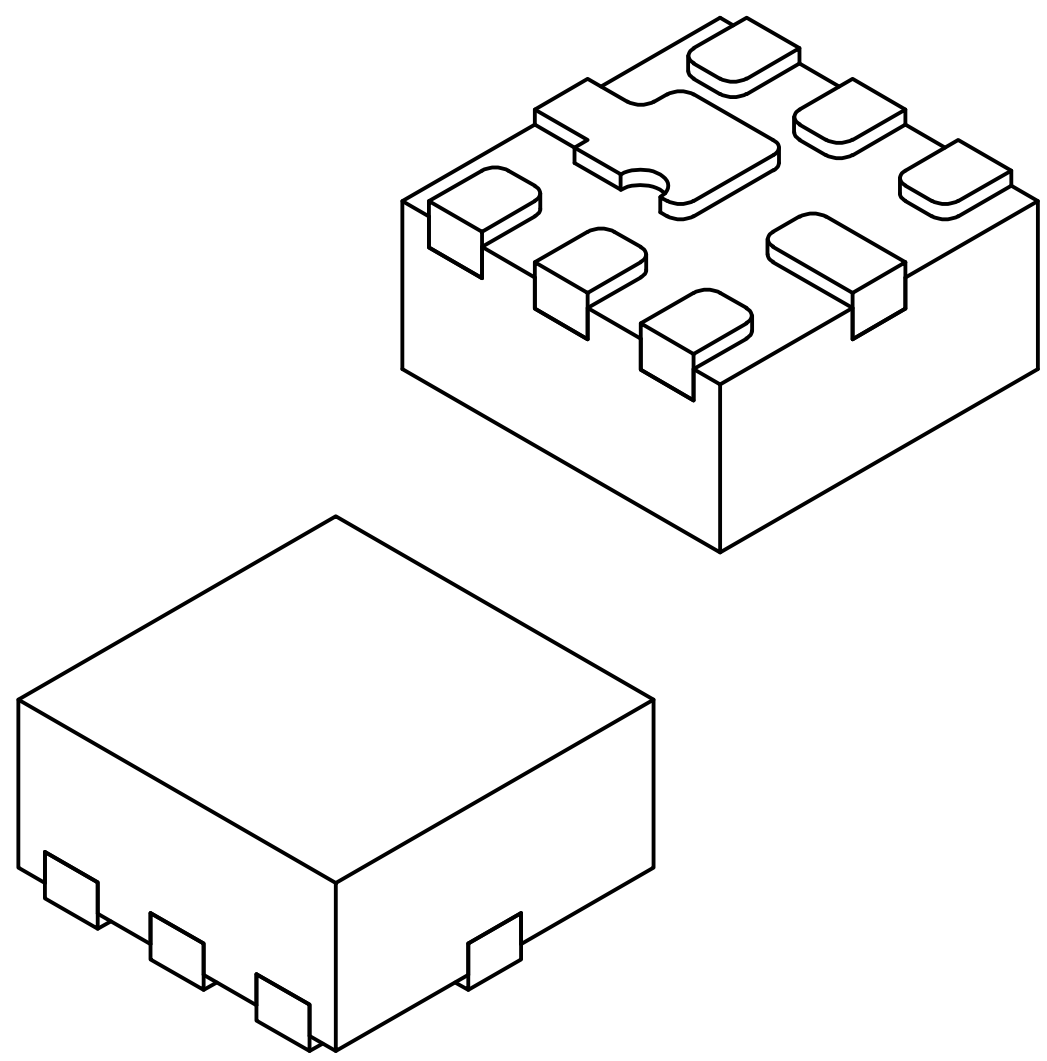

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		8	
Pitch	e		0.40 BSC	
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.152 REF	
Overall Length	D		1.20 BSC	
Exposed Pad Length	D2	0.35	0.40	0.45
Exposed Pad Length Off Set	D3	0.10	0.15	0.20
Overall Width	E		1.20 BSC	
Exposed Pad Width	E2	0.35	0.40	0.45
Terminal Width	b	0.15	0.20	0.25
Terminal Length (X6)	L1	0.20	0.25	0.30
Terminal Length((X1)	L2	0.30	0.35	0.40
Terminal-to-Exposed-Pad	K		0.10 REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1171 Rev A Sheet 2 of 2

8-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MCA) - 1.2x1.2x0.6 mm Body [UQFN] With 0.40 mm Fused Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

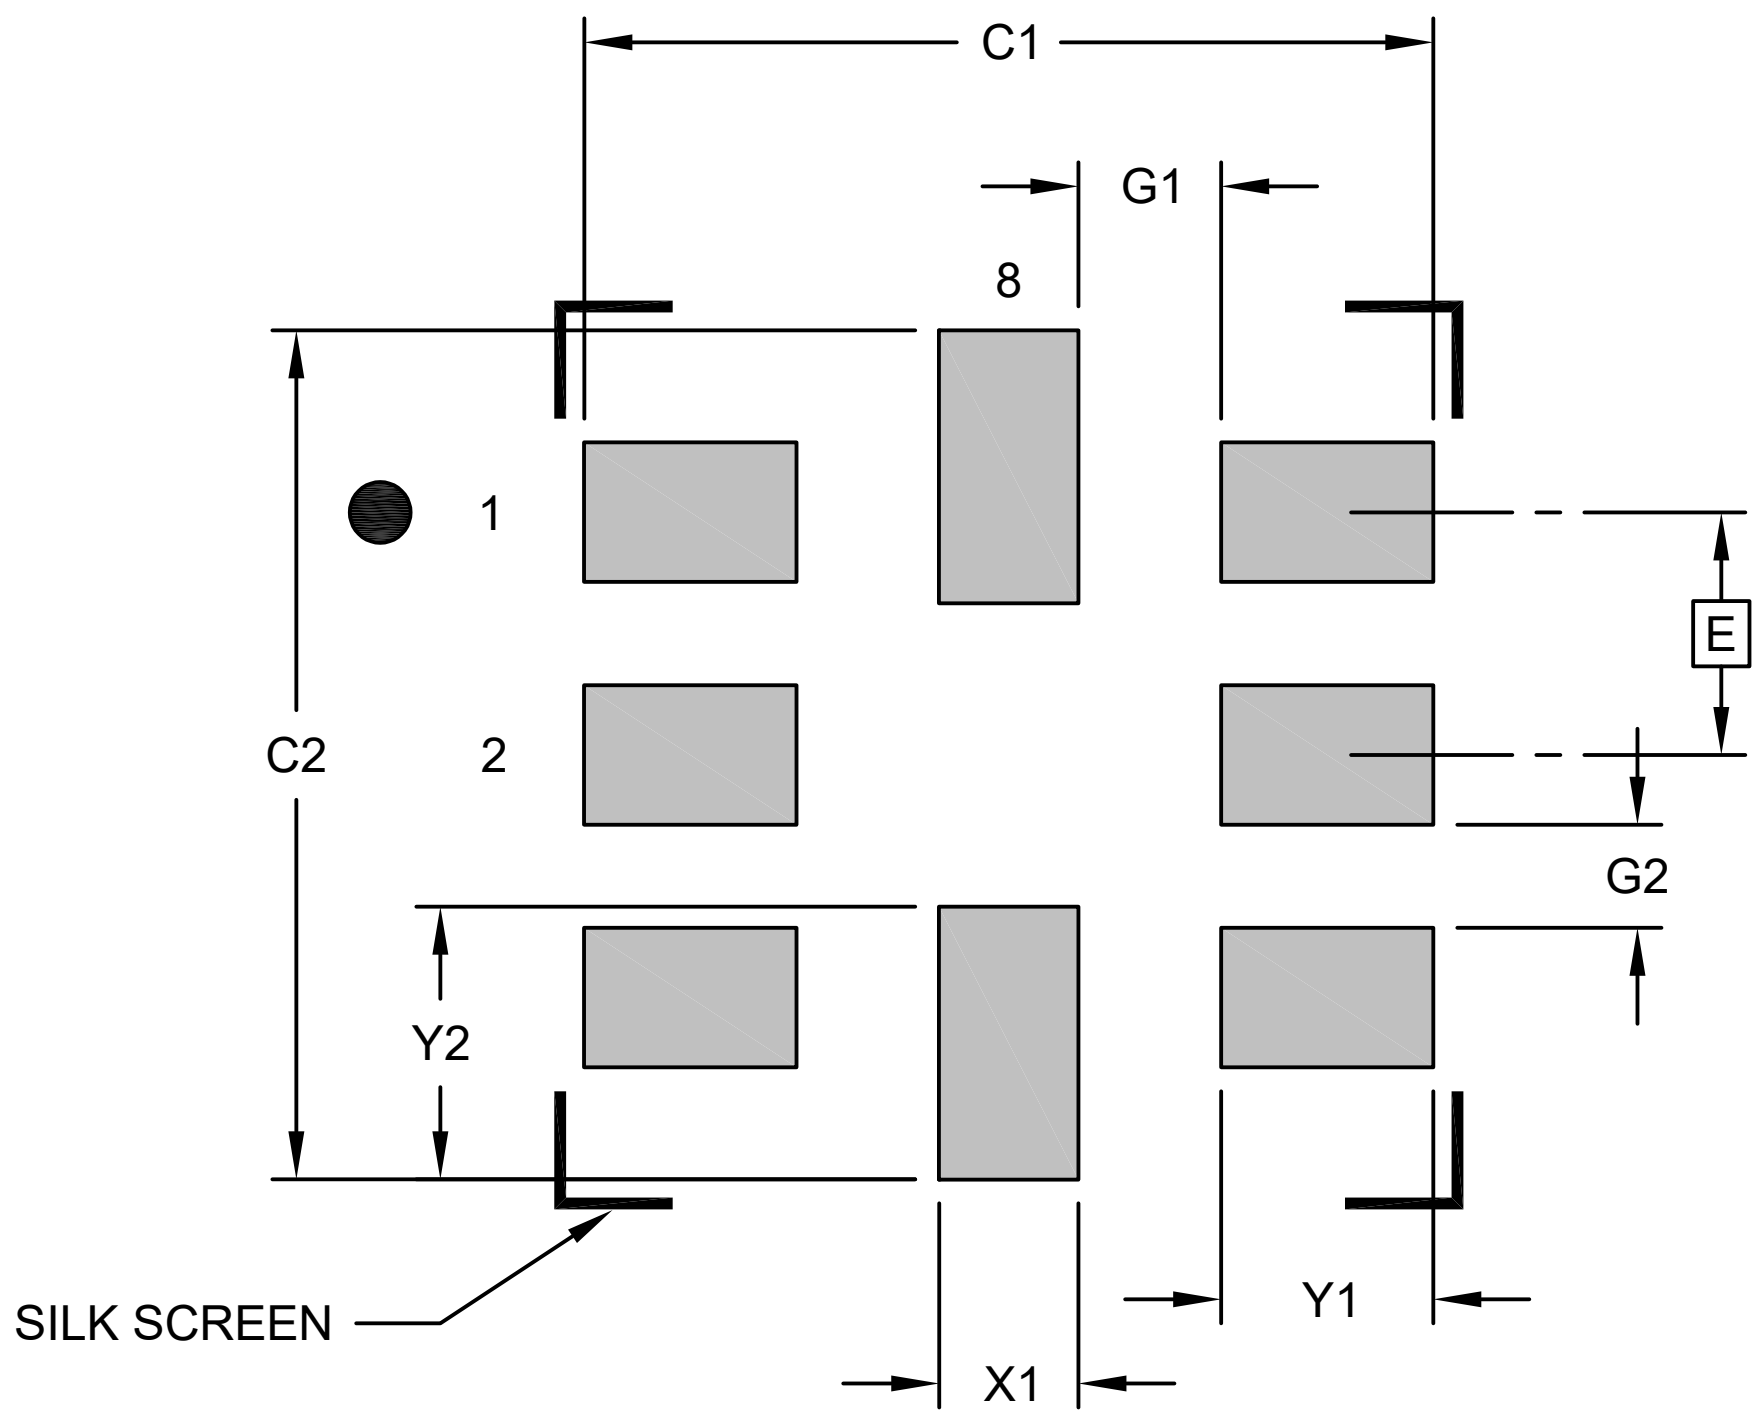

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.40 BSC	
Contact Pad Spacing	C1		1.40	
Contact Pad Spacing	C2		1.40	
Contact Pad Width (X8)	X1			0.28
Contact Pad Length (X6	Y1			0.35
Contact Pad Length (X2)	Y2			0.45
Contact Pad to Contact Pad (X4)	G1	0.24		
Contact Pad to Contact Pad (X4)	G2	0.17		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3171 Rev A