128-Lead Metric Plastic Quad Flat Pack (C2A) - 20x14x2.72 mm Body [PQFP]
MICREL Legacy Package PQFP14X20-128L

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

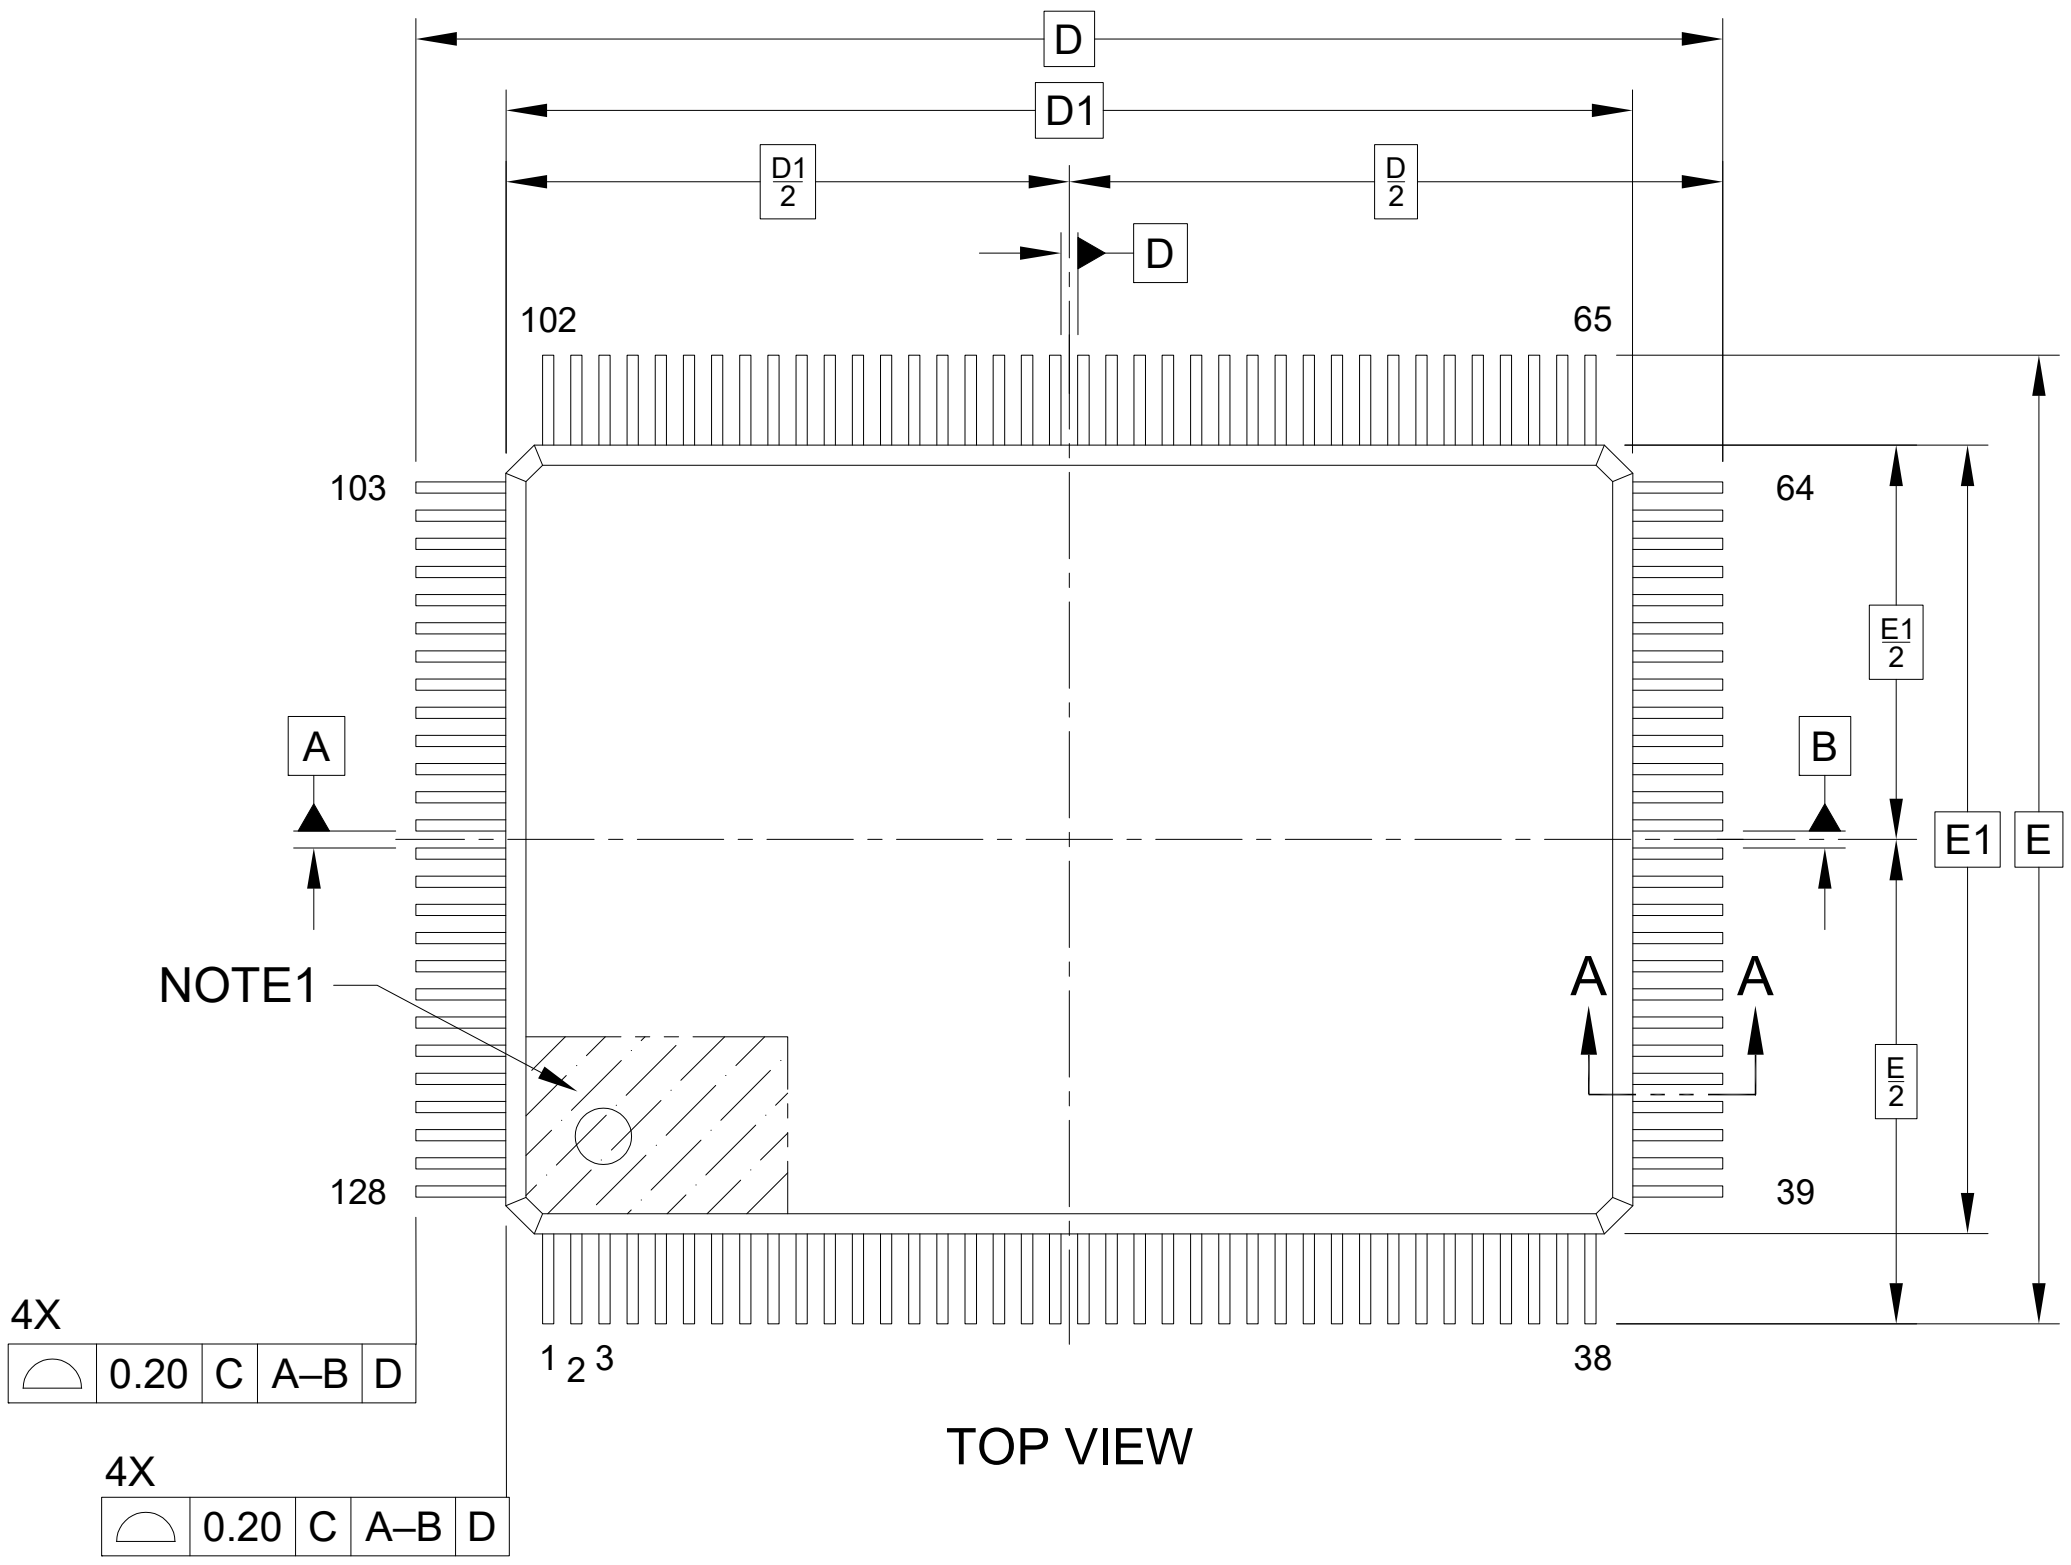

TOP VIEW

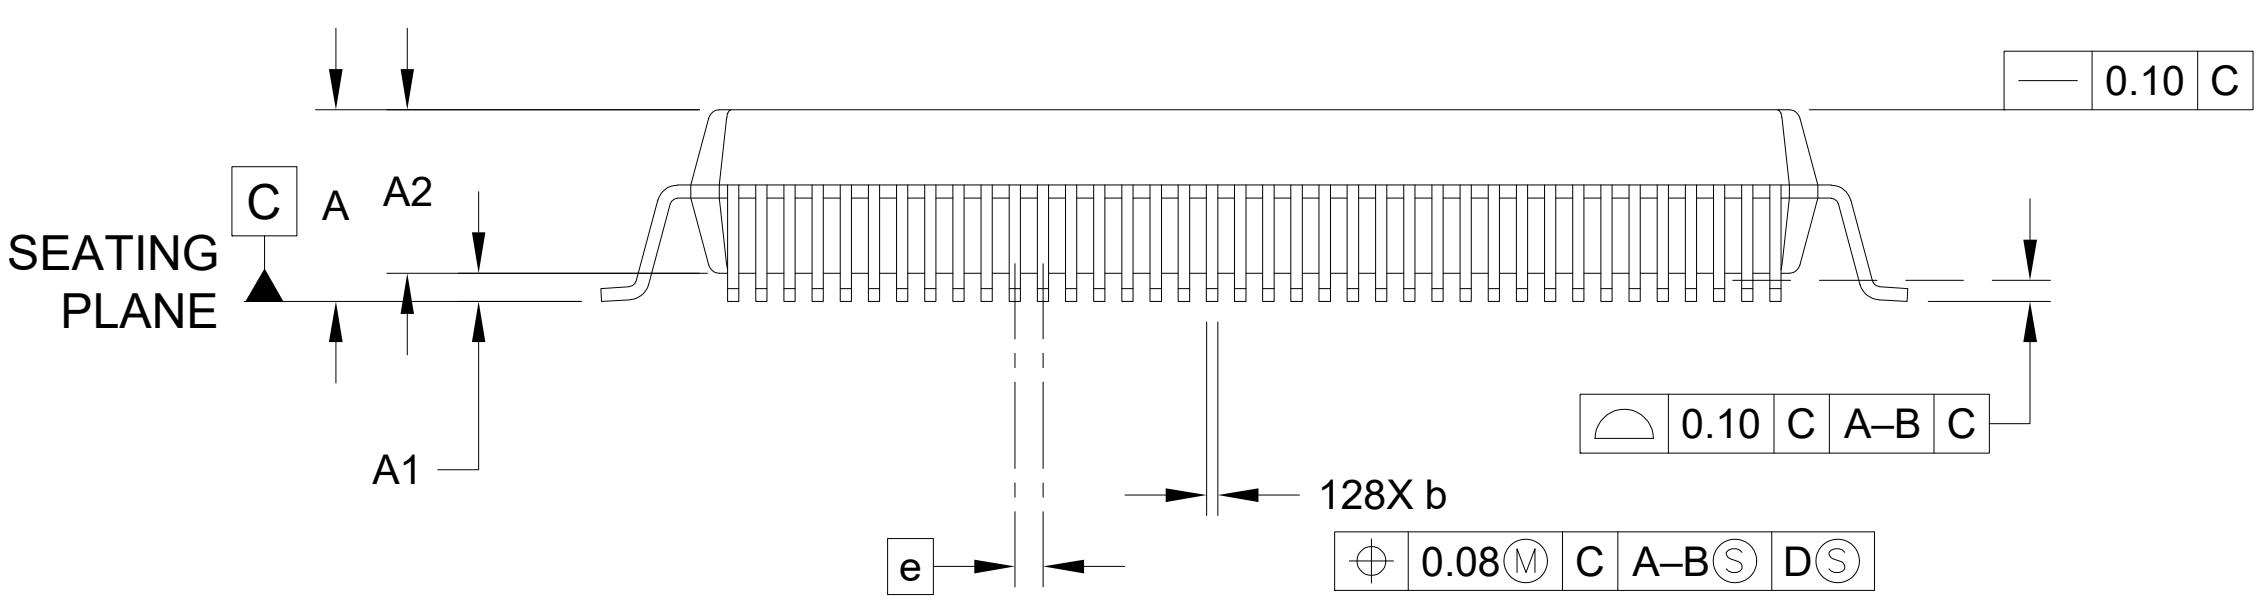

BOTTOM VIEW

128-Lead Metric Plastic Quad Flat Pack (C2A) - 20x14x2.72 mm Body [PQFP]
MICREL Legacy Package PQFP14X20-128L

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

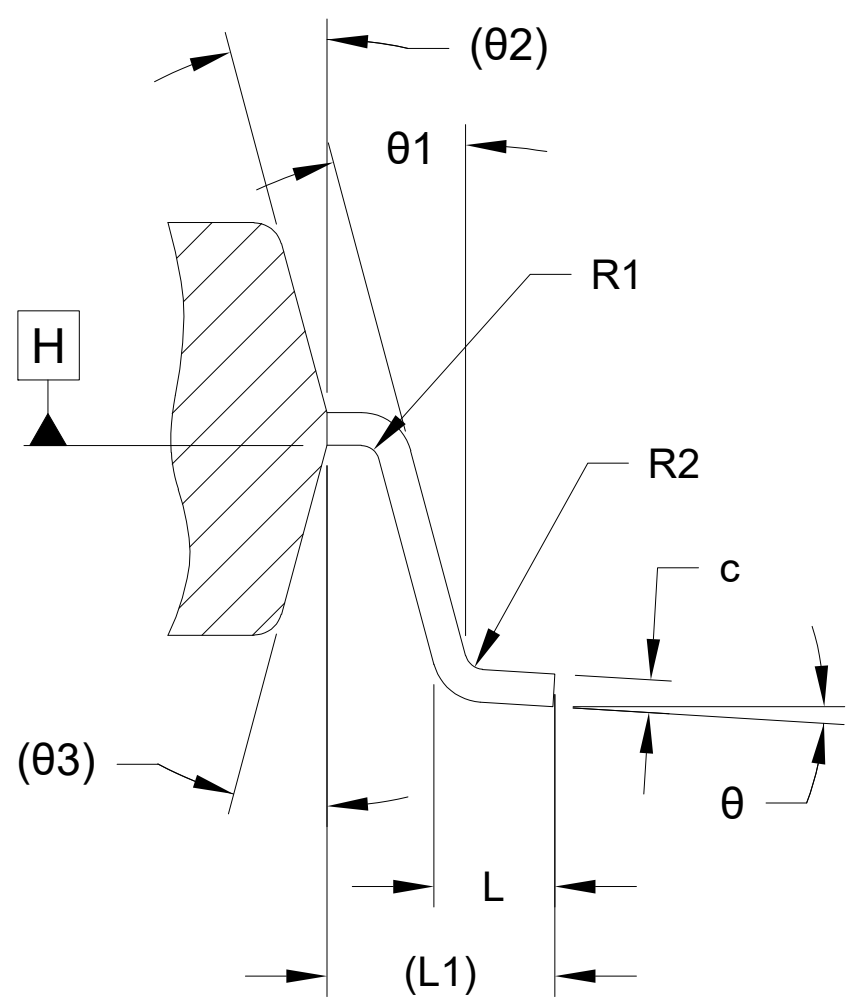

SECTION A–A

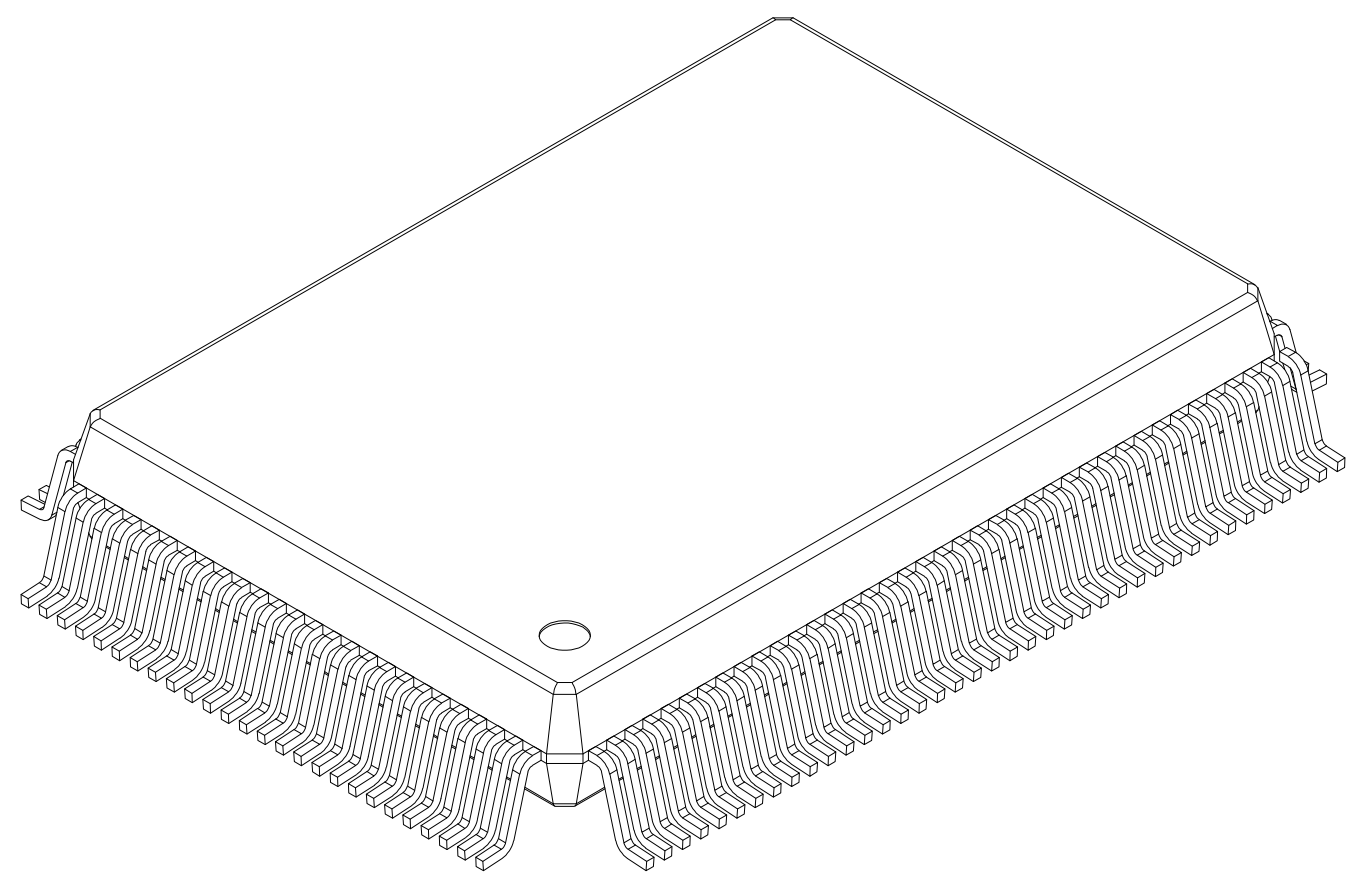

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N	128		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	3.40
Standoff	A1	0.25	–	–
Molded Package Thickness	A2	2.50	2.72	2.90
Overall Length	D	23.20 BSC		
Molded Package Length	D1	20.00 BSC		
Overall Width	E	17.20 BSC		
Molded Package Width	E1	14.00 BSC		
Terminal Width	b	0.17	0.20	0.27
Terminal Thickness	c	0.11	0.15	0.23
Terminal Length	L	0.73	0.88	1.03
Footprint	L1	1.60 REF		
Lead Bend Radius	R1	0.13	–	–
Lead Bend Radius	R2	0.13	–	0.30
Foot Angle	θ	0°	3.5°	7°
Lead Angle	θ1	0°	–	–
Mold Draft Angle	θ2	15° REF		
Mold Draft Angle	θ3	15° REF		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

128-Lead Metric Plastic Quad Flat Pack (C2A) - 20x14x2.72 mm Body [PQFP] MICREL Legacy Package PQFP14X20-128L

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

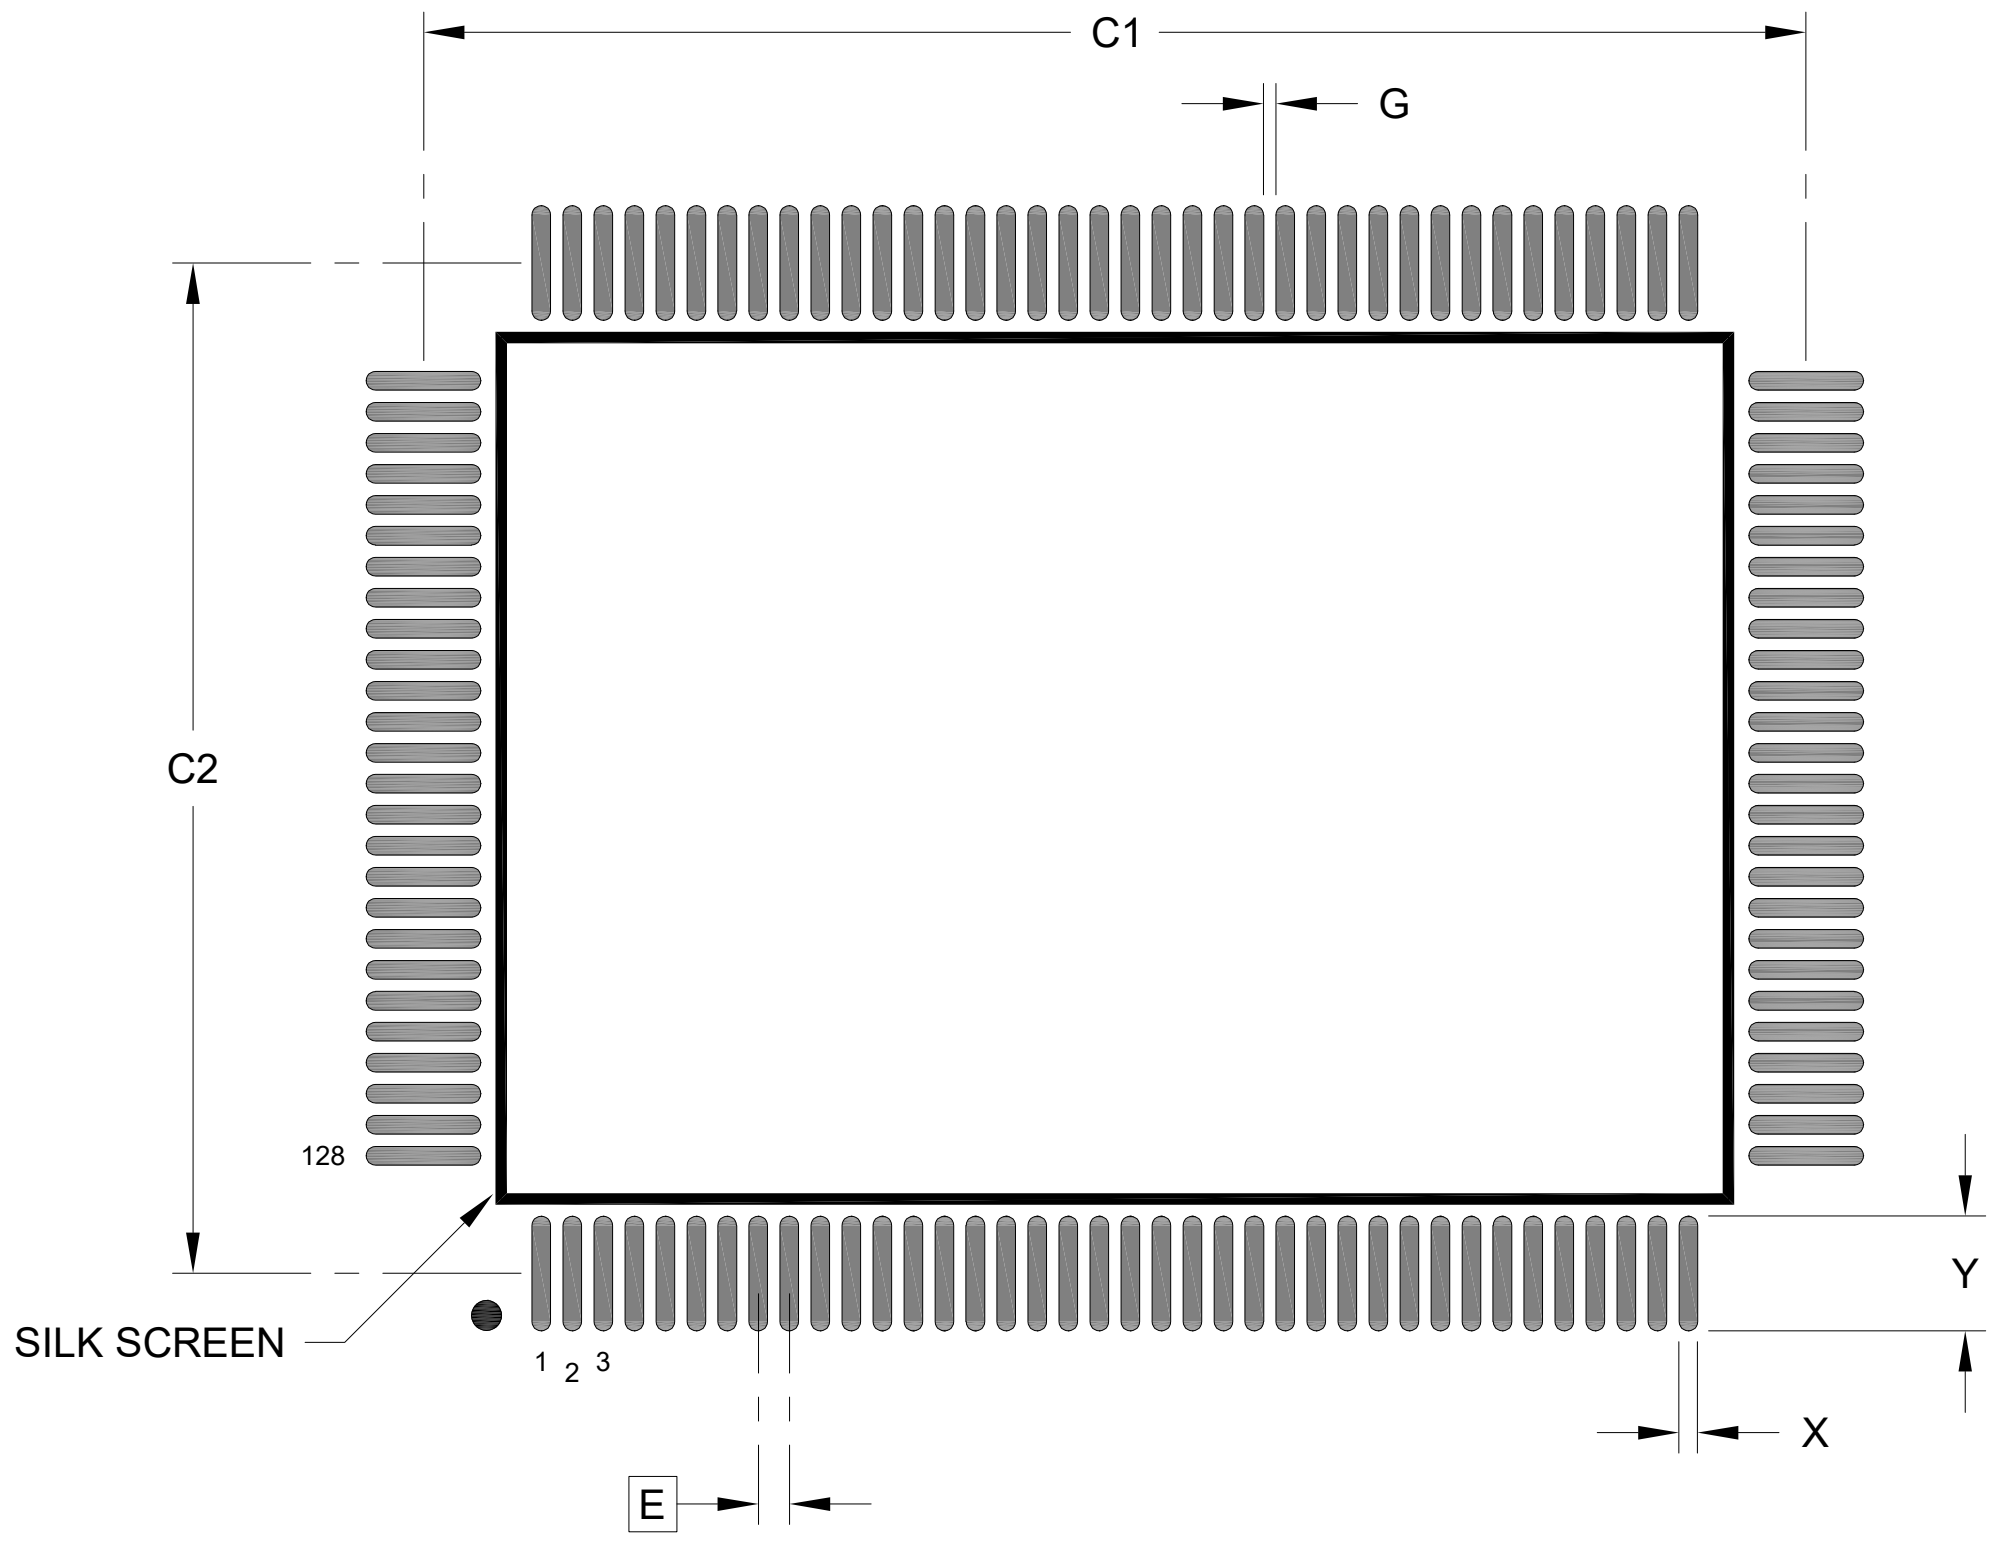

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		22.30	
Contact Pad Spacing	C2		16.30	
Contact Pad Width (X128)	X			0.30
Contact Pad Length (X128)	Y			1.85
Contact Pad to Contact Pad (X124)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3091 Rev A