43-Lead Very Thin Plastic Quad Flat, No Lead Package (KXX) - 7x7 mm Body [VQFN] With Dual Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

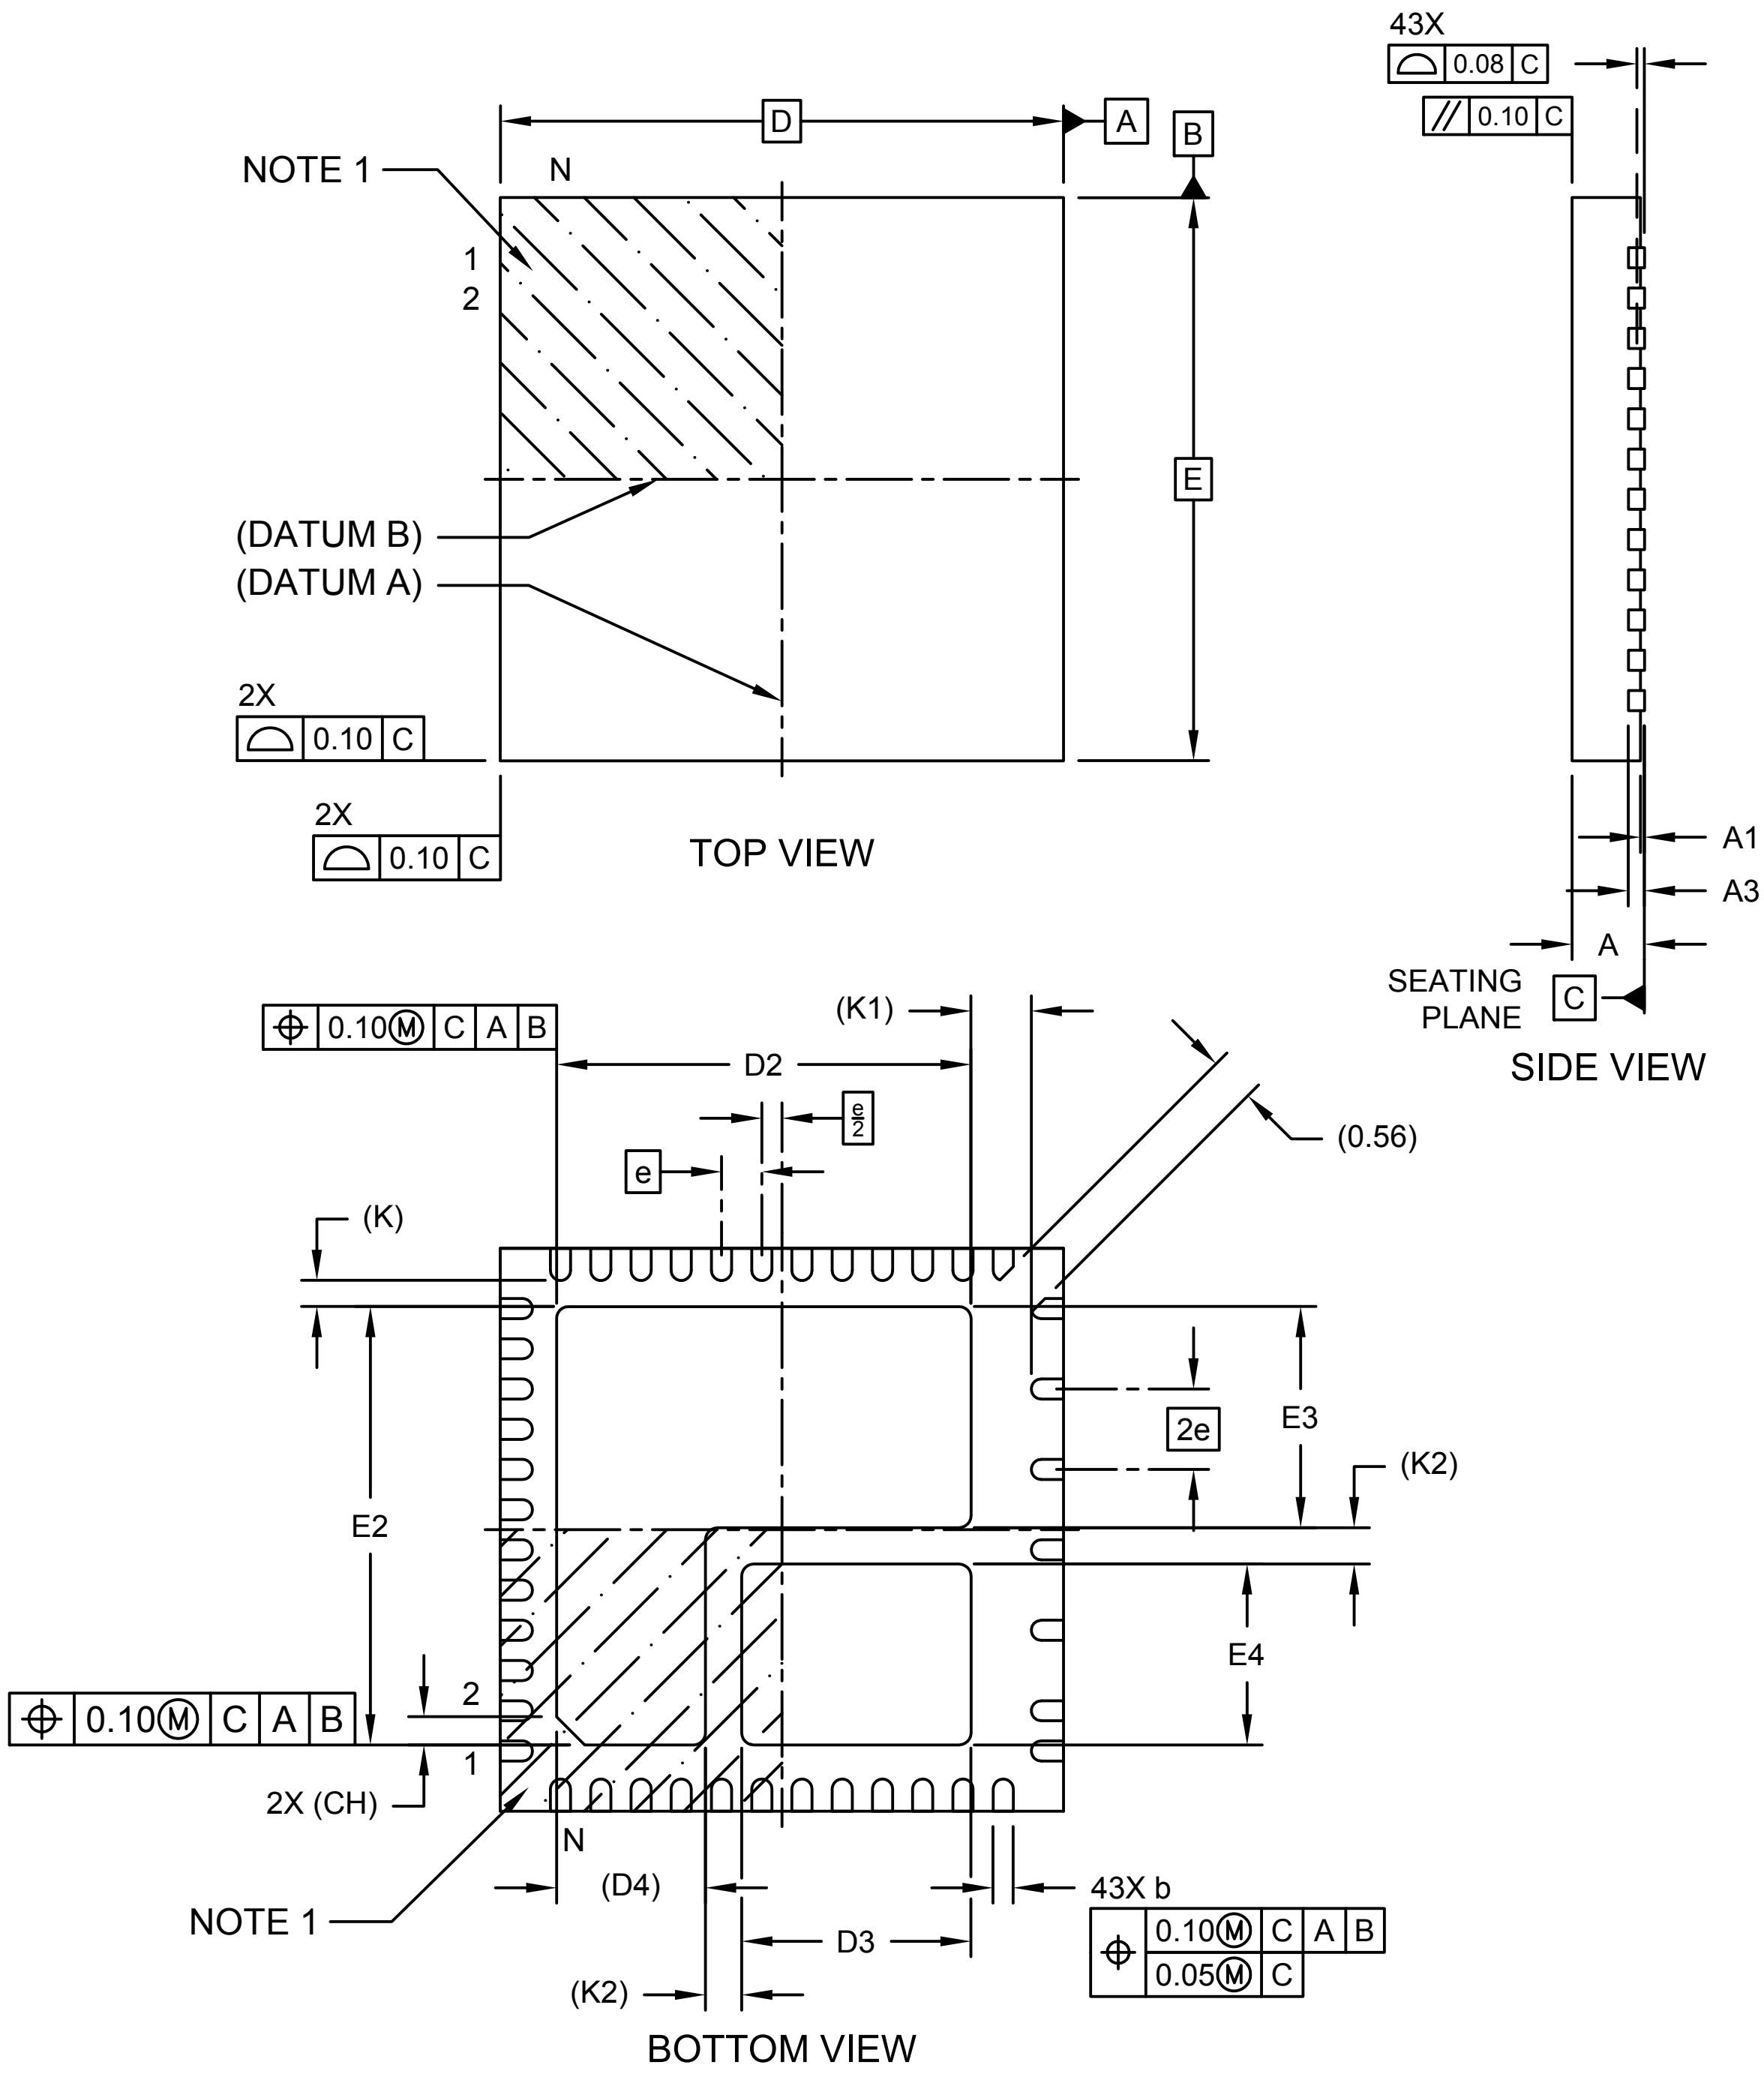

Microchip Technology Drawing C04-471 Rev. A Sheet 1 of 2

43-Lead Very Thin Plastic Quad Flat, No Lead Package (KXX) - 7x7 mm Body [VQFN] With Dual Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

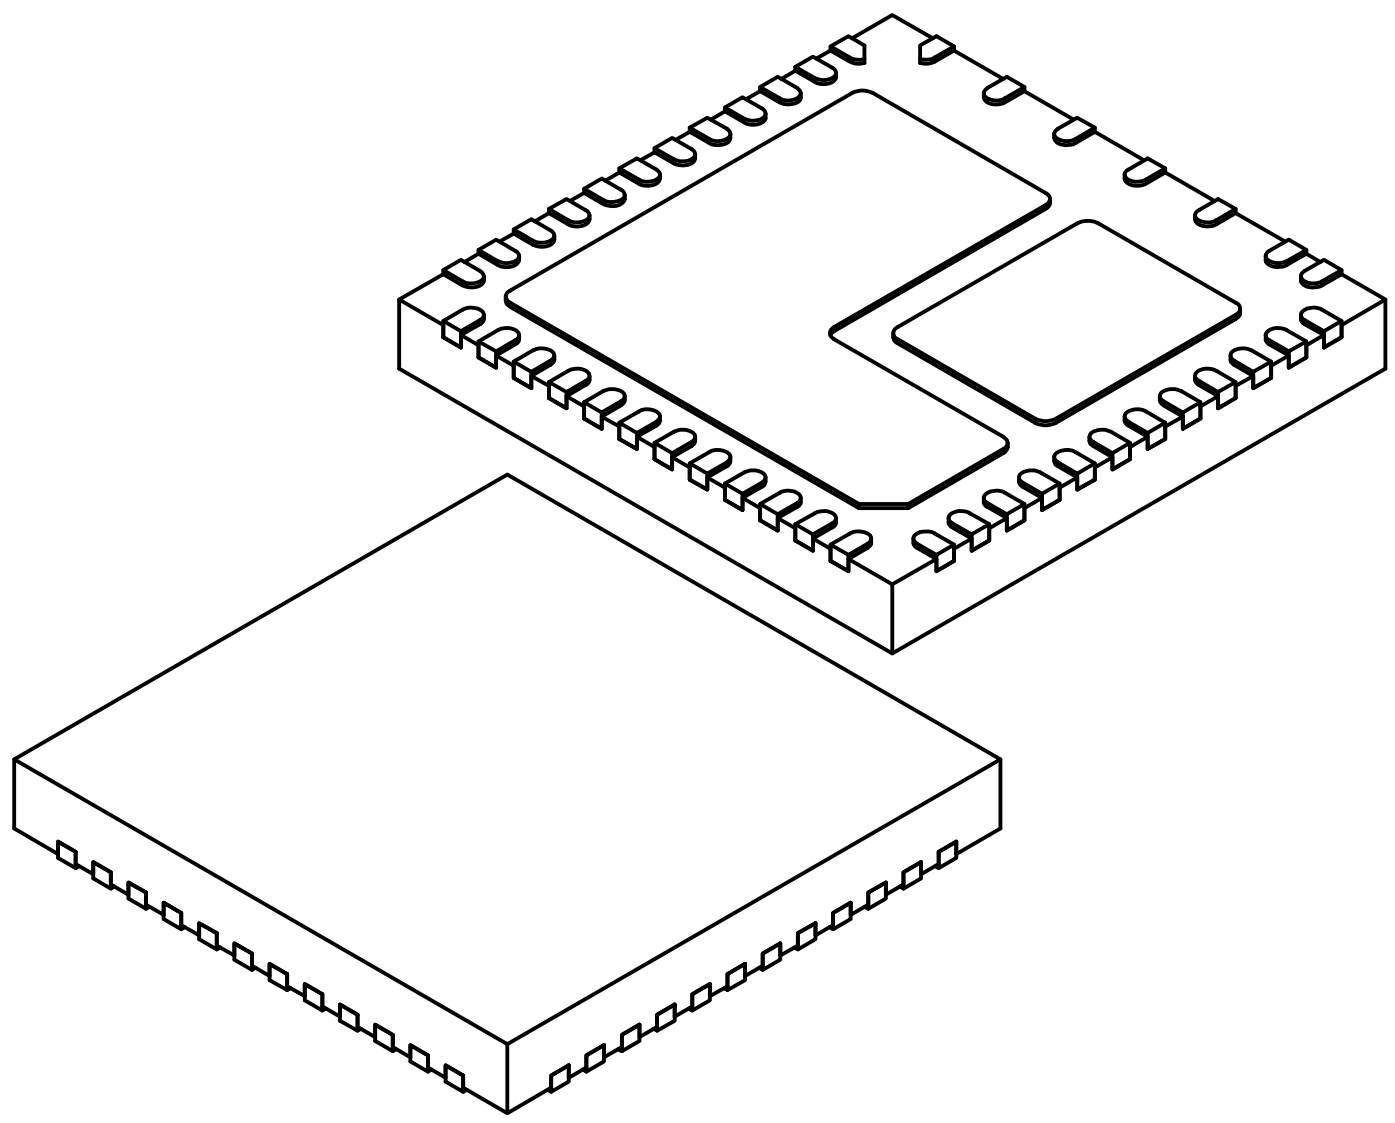

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		43	
Pitch	e		0.50 BSC	
Overall Height	A	0.80	0.85	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.20 REF	
Overall Length	D		7.00 BSC	
Exposed Pad Length	D2	5.05	5.15	5.25
Exposed Pad Length	D3	2.75	2.85	2.95
Exposed Pad Length	D4		1.85 REF	
Overall Width	E		7.00 BSC	
Exposed Pad Width	E2	5.35	5.45	5.55
Exposed Pad Width	E3	2.65	2.75	2.85
Exposed Pad Width	E4	2.15	2.25	2.35
Terminal Width	b	0.18	0.25	0.30
Terminal Length	L	0.35	0.40	0.45
Pin 1 Index Chamfer	CH		0.35 REF	
Terminal-to-Exposed Pad	K		0.32 REF	
Terminal-to-Exposed Pad	K1		0.75 REF	
Exposed Pad-to-Exposed Pad	K2		0.45 REF	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-471 Rev. A Sheet 2 of 2

43-Lead Very Thin Plastic Quad Flat, No Lead Package (KXX) - 7x7 mm Body [VQFN] With Dual Exposed Pads

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

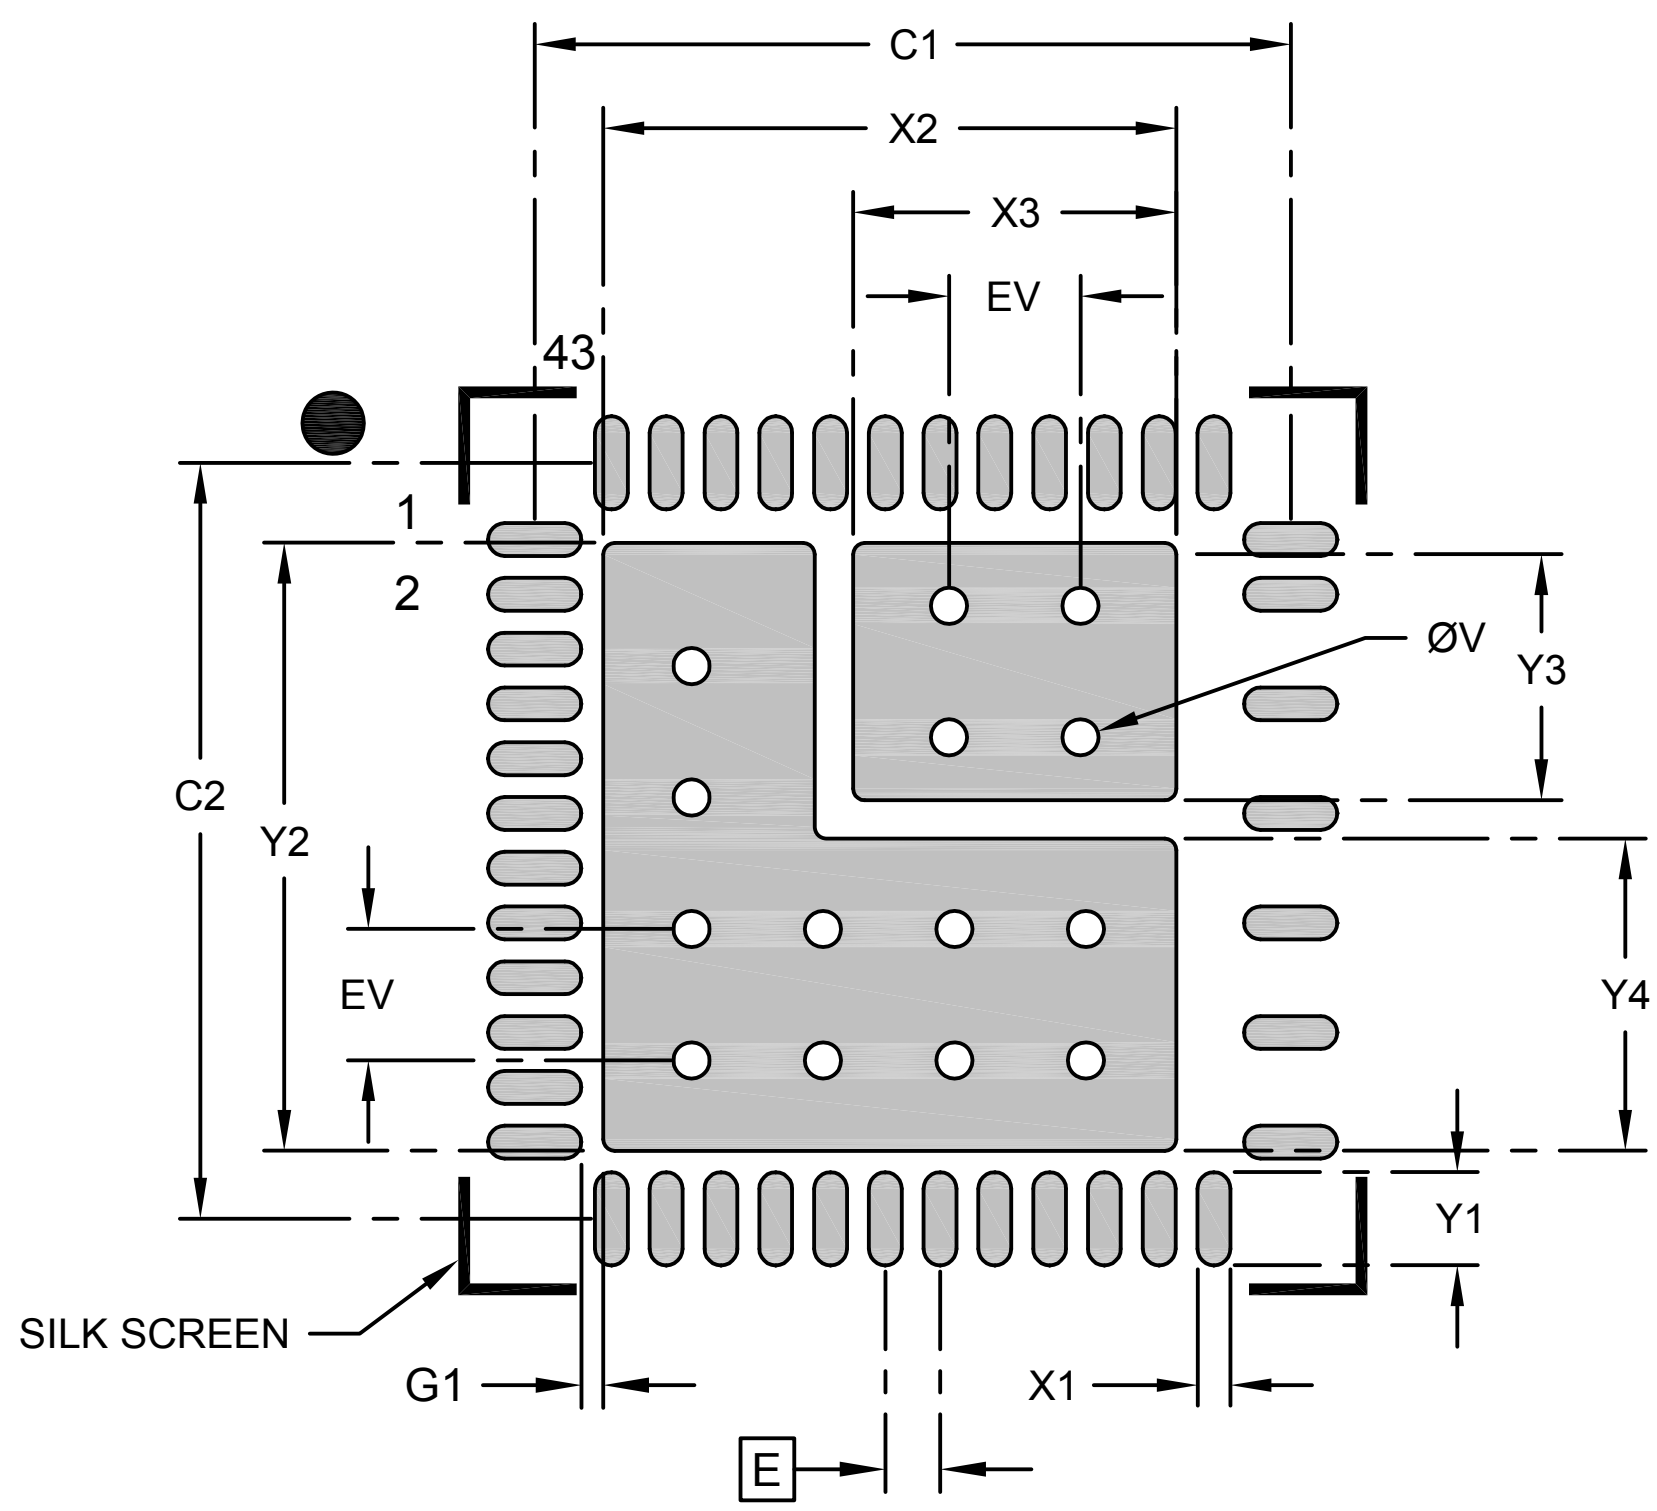

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Optional Center Pad Width	X2			5.23
Optional Center Pad Width	X3			2.95
Optional Center Pad Length	Y2			5.55
Optional Center Pad Length	Y3			2.35
Optional Center Pad Length	Y4			2.85
Contact Pad Spacing	C1		6.90	
Contact Pad Spacing	C2		6.90	
Contact Pad Width (X43)	X1			0.30
Contact Pad Length (X43)	Y1			0.85
Contact Pad to Center Pad (X43)	G1	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2471 Rev. A