44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2.0 mm Body, 3.9 mm Footprint [PQFP]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

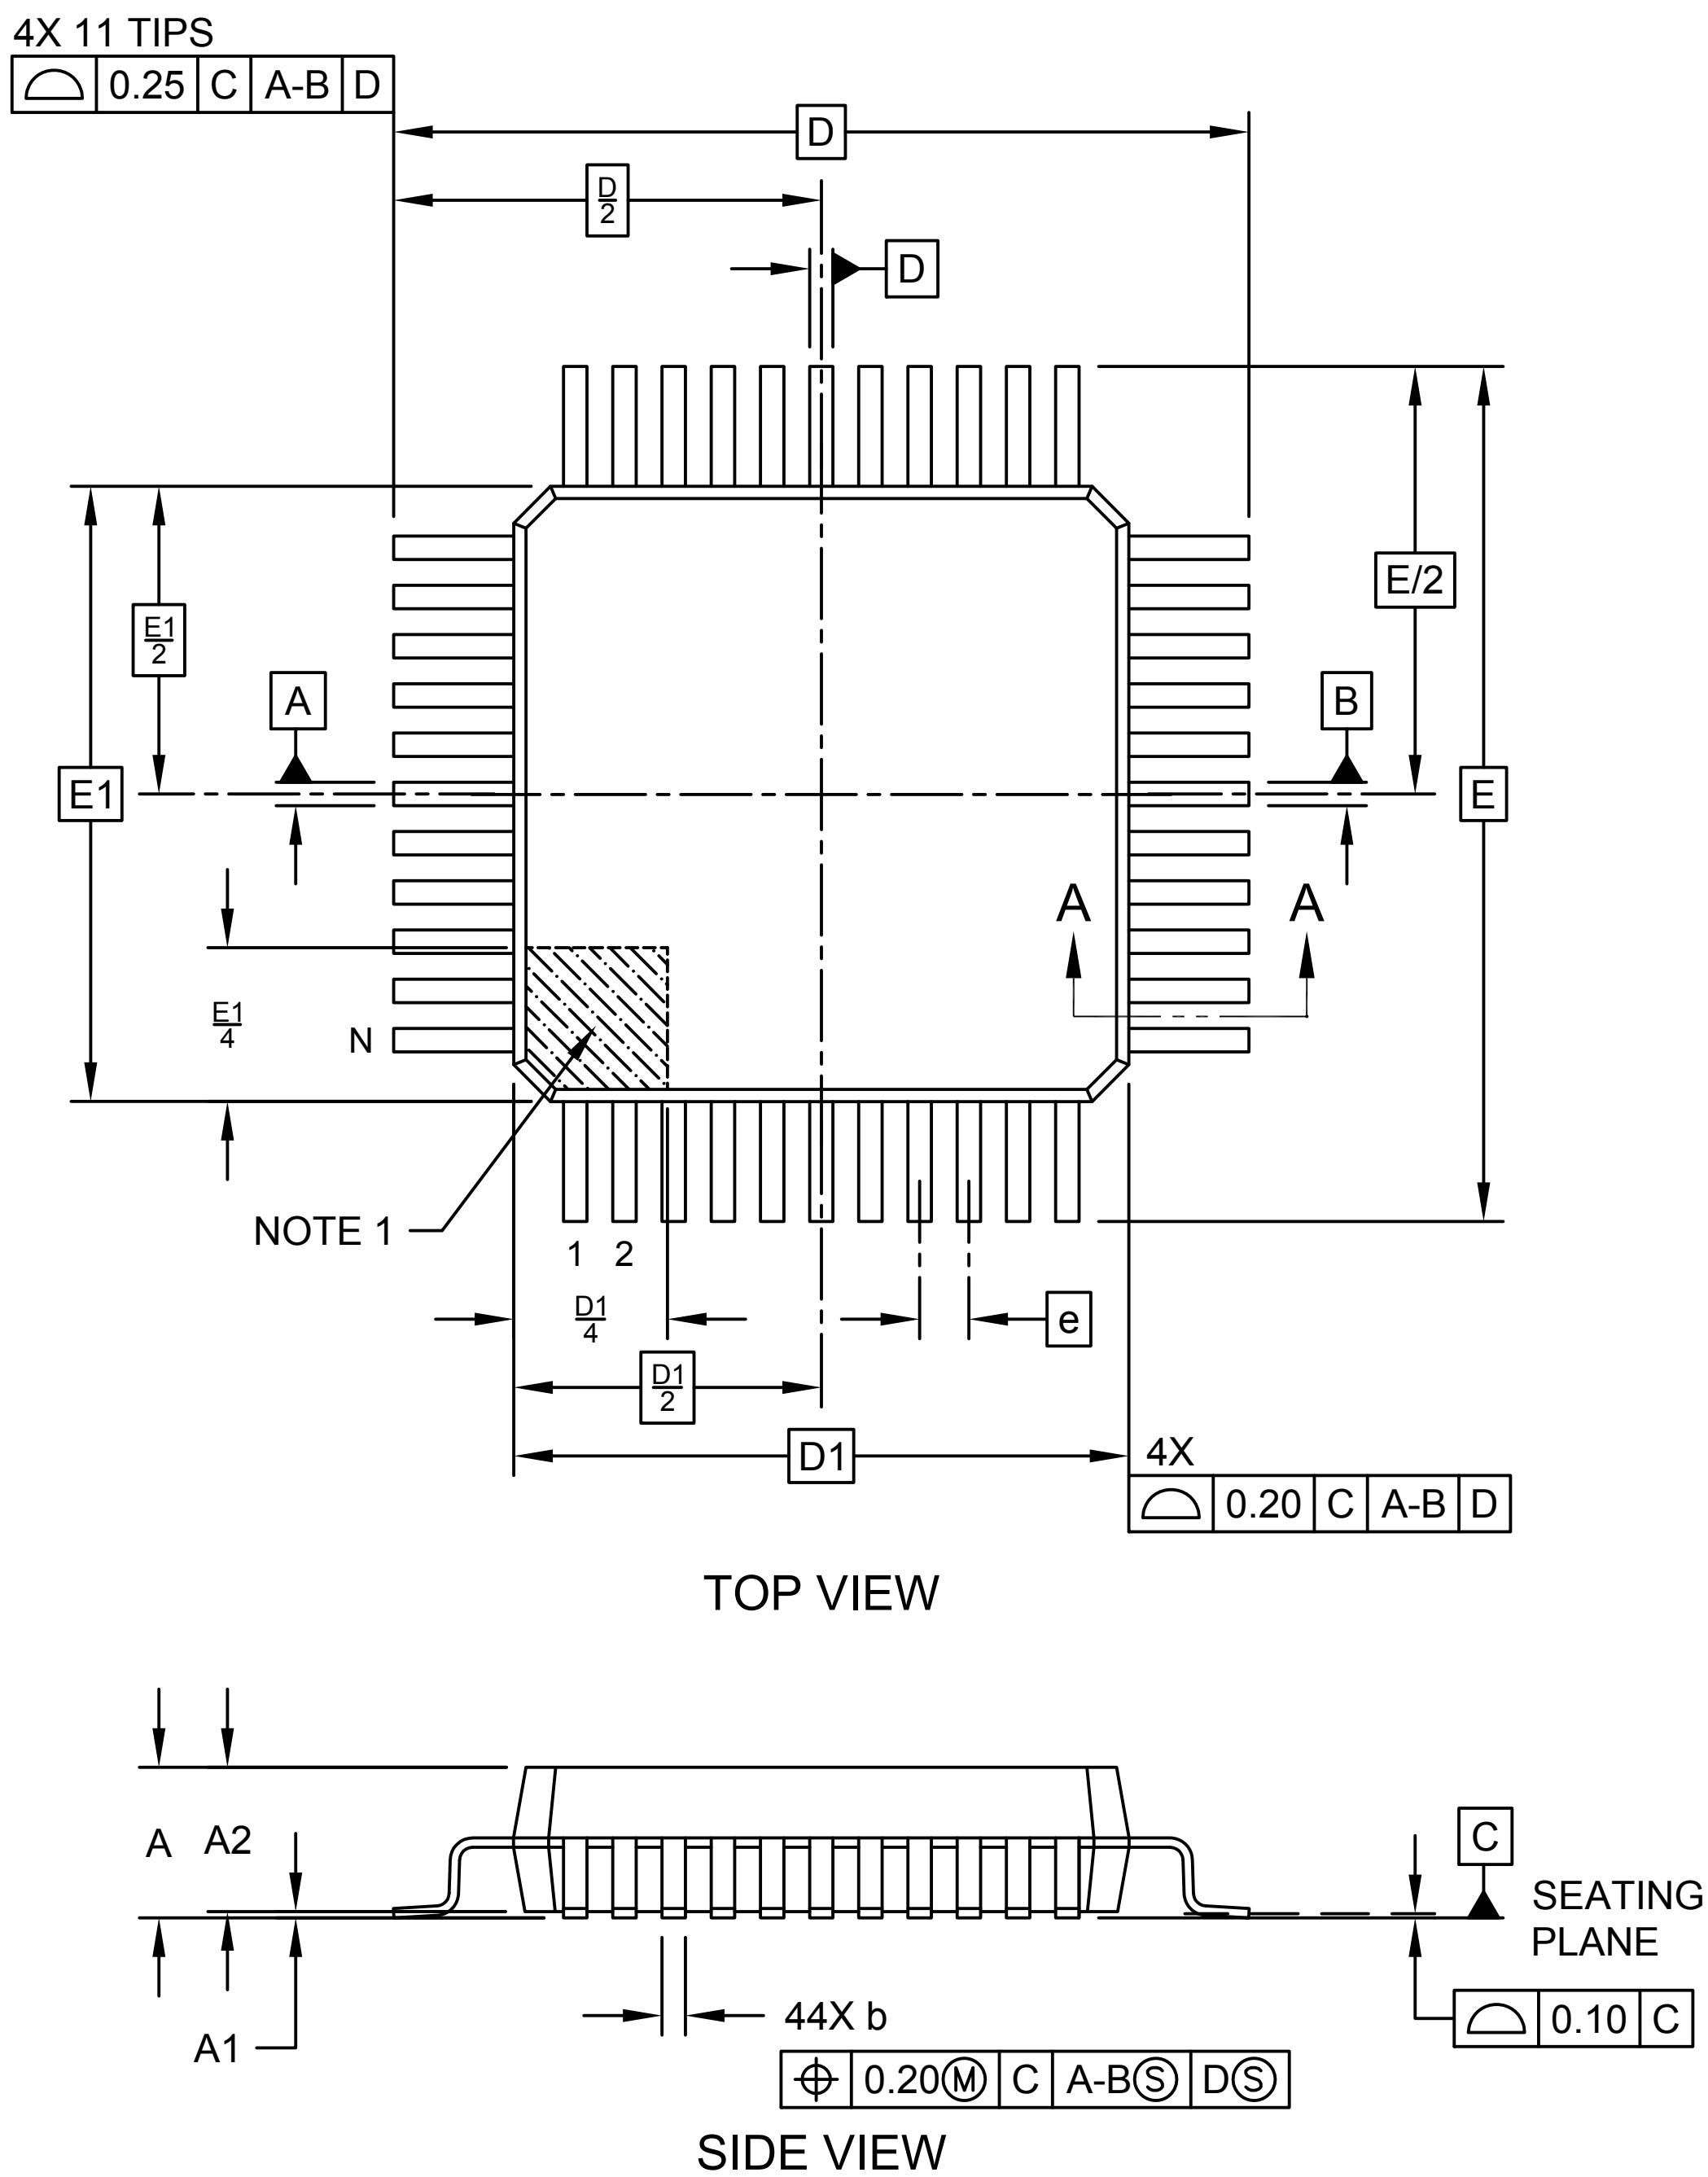

Microchip Technology Drawing C04-119 Rev A Sheet 1 of 2

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2.0 mm Body, 3.9 mm Footprint [PQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

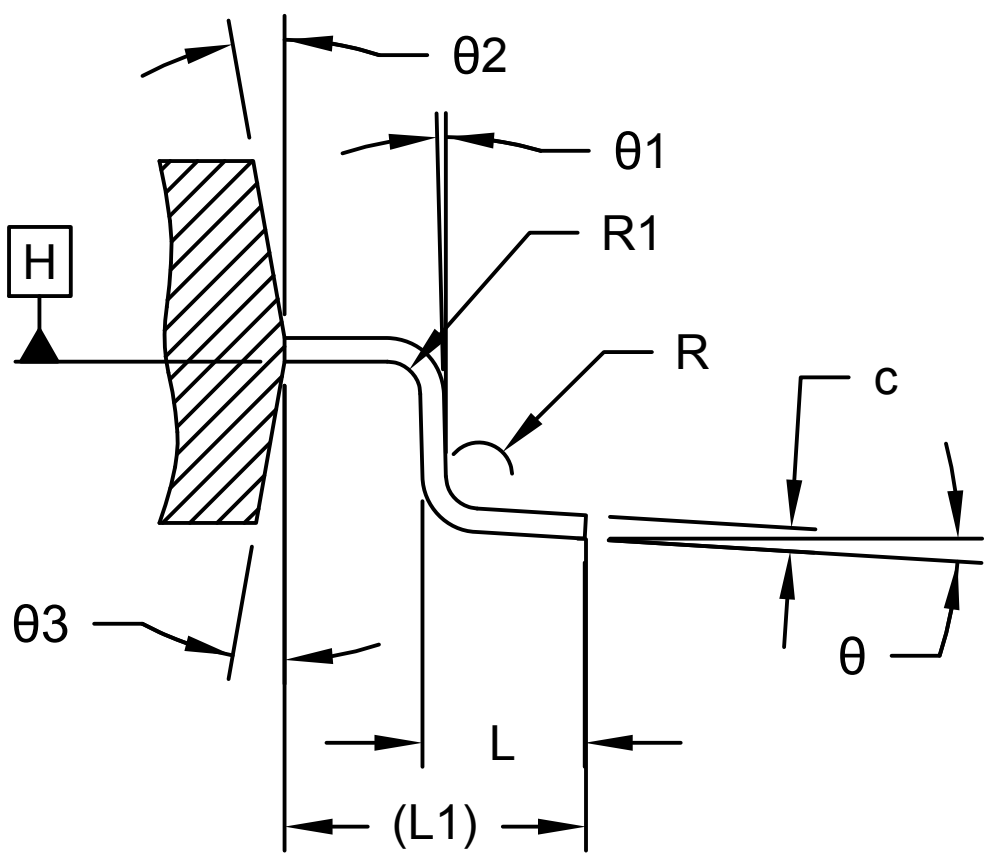

SECTION A-A

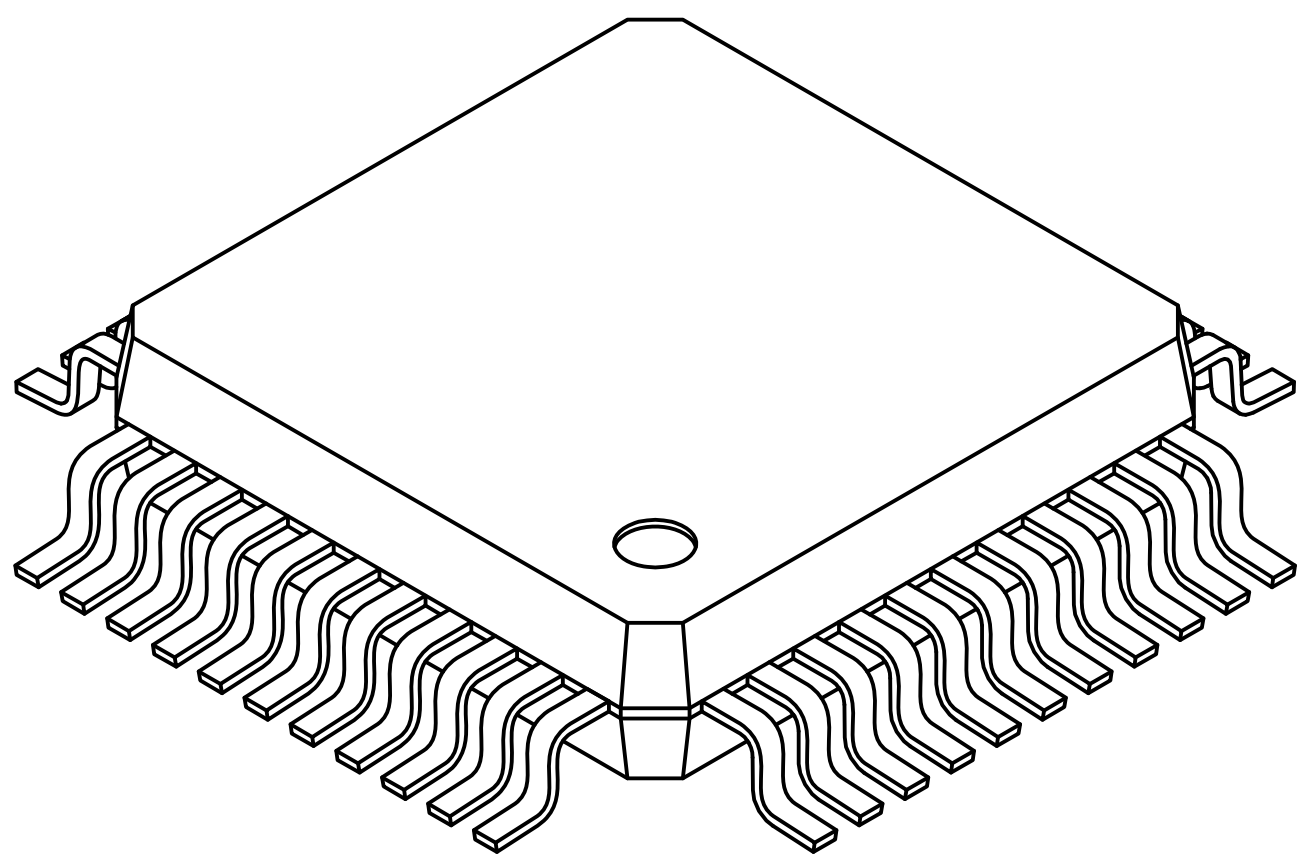

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N	44		
Pitch	e	0.80 BSC		
Overall Height	A	-	-	2.35
Standoff §	A1	-	-	0.25
Molded Package Thickness	A2	1.95	2.00	2.10
Overall Length	D	13.90 BSC		
Molded Package Length	D1	10.00 BSC		
Overall Width	E	13.90 BSC		
Molded Package Width	E1	10.00 BSC		
Terminal Width	b	0.30	-	0.45
Terminal Thickness	c	0.11	-	0.23
Foot Length	L	0.73	0.88	1.03
Footprint	L1	1.95 REF		
Lead Bend Radius	R	0.13	-	0.30
Lead Bend Radius	R1	0.13	-	-
Foot Angle	θ	0°	3.5°	7°
Lead Angle	θ1	0°	-	-
Mold Draft Angle	θ2	5°	-	16°
Mold Draft Angle	θ3	5°	-	16°

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Chamfers at corners are optional; size may vary.
3. Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
4. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.
5. § – Significant Characteristic

Microchip Technology Drawing C04-119 Rev A Sheet 2 of 2

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2.0 mm Body, 3.9 mm Footprint [PQFP]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

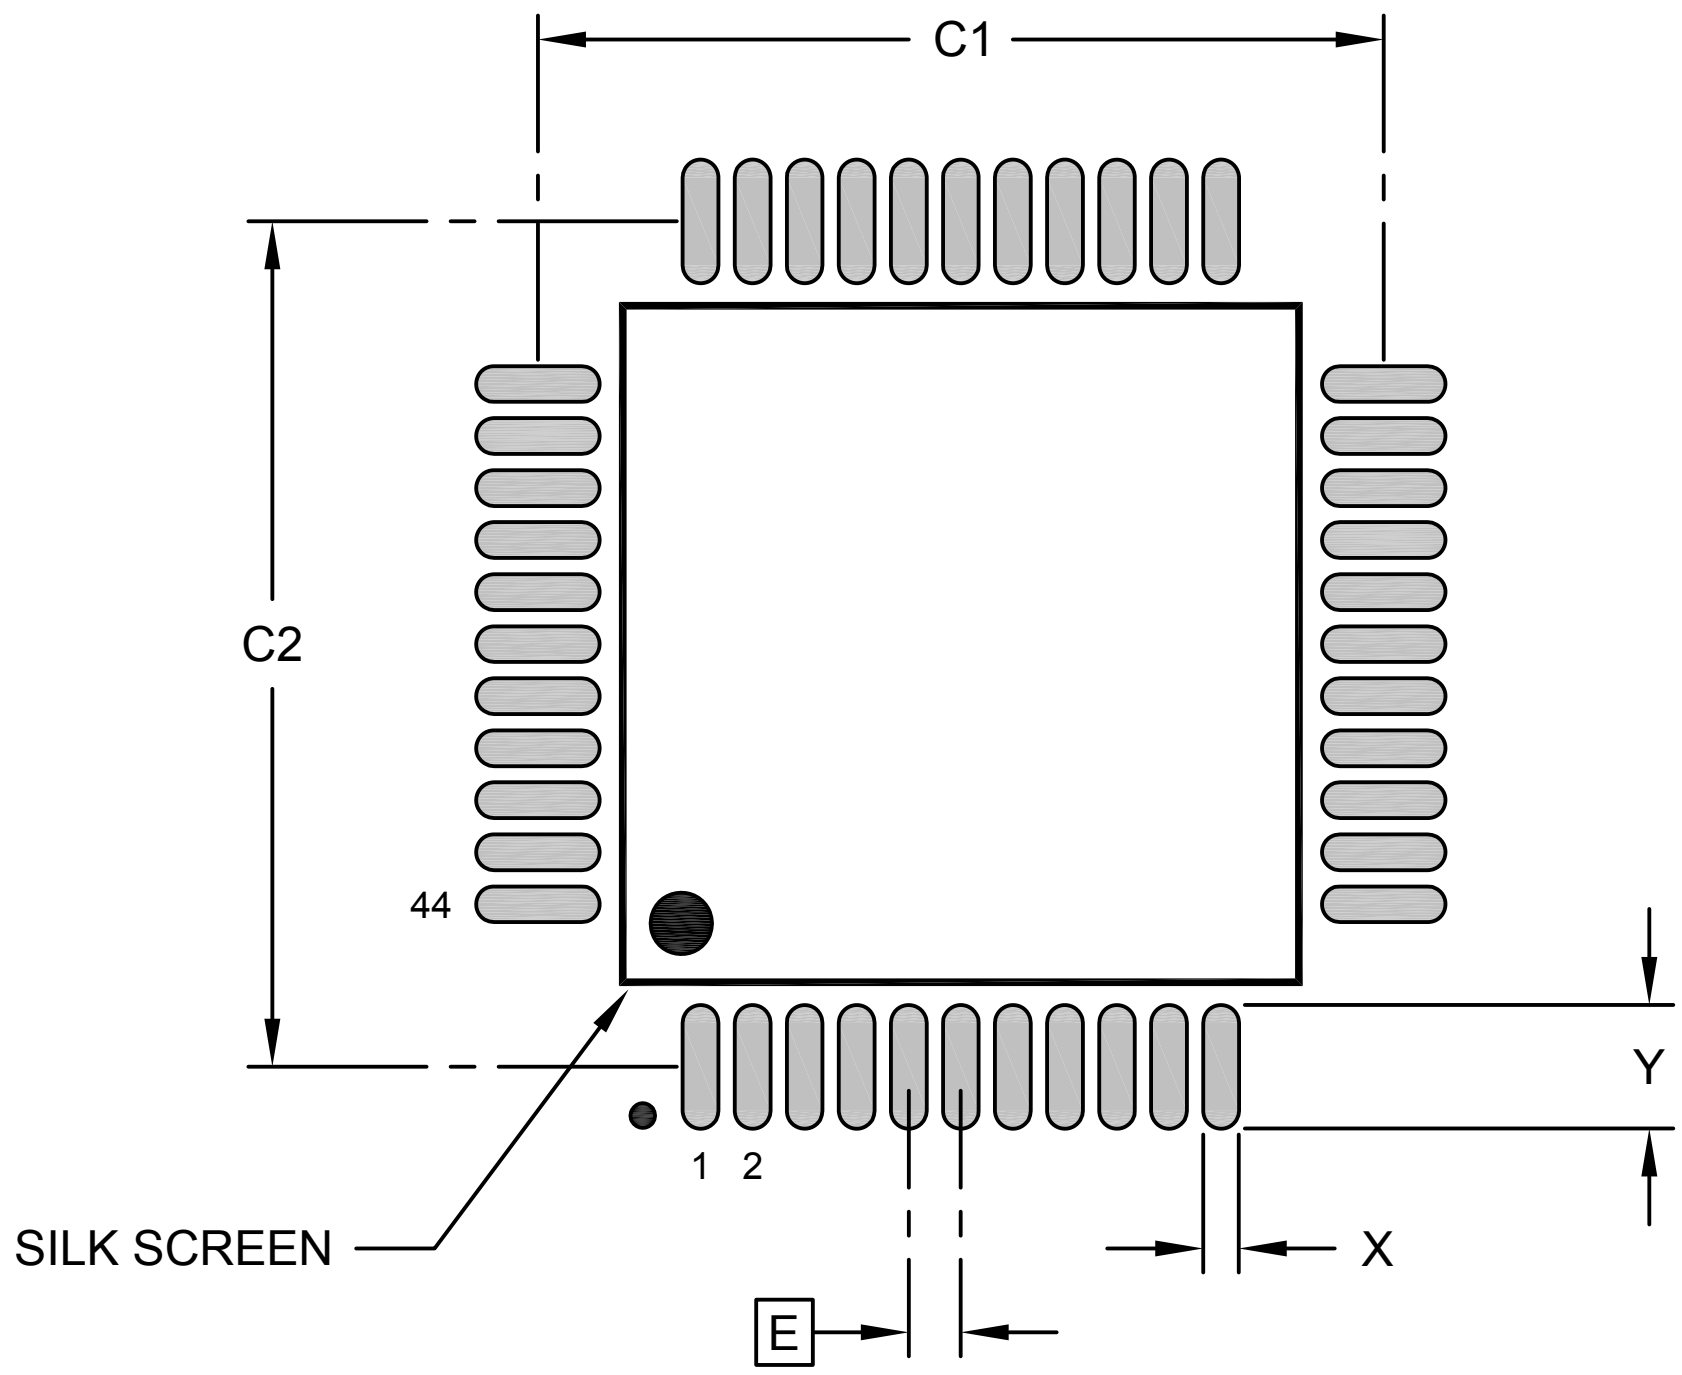

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		13.00	
Contact Pad Spacing	C2		13.00	
Contact Pad Width (Xnn)	X			0.55
Contact Pad Length (Xnn)	Y			1.90

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2119 Rev A