## 80-Lead Low-Profile Plastic Quad Flat Pack (PL) - 14x14x1.4 mm Body [LQFP]

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

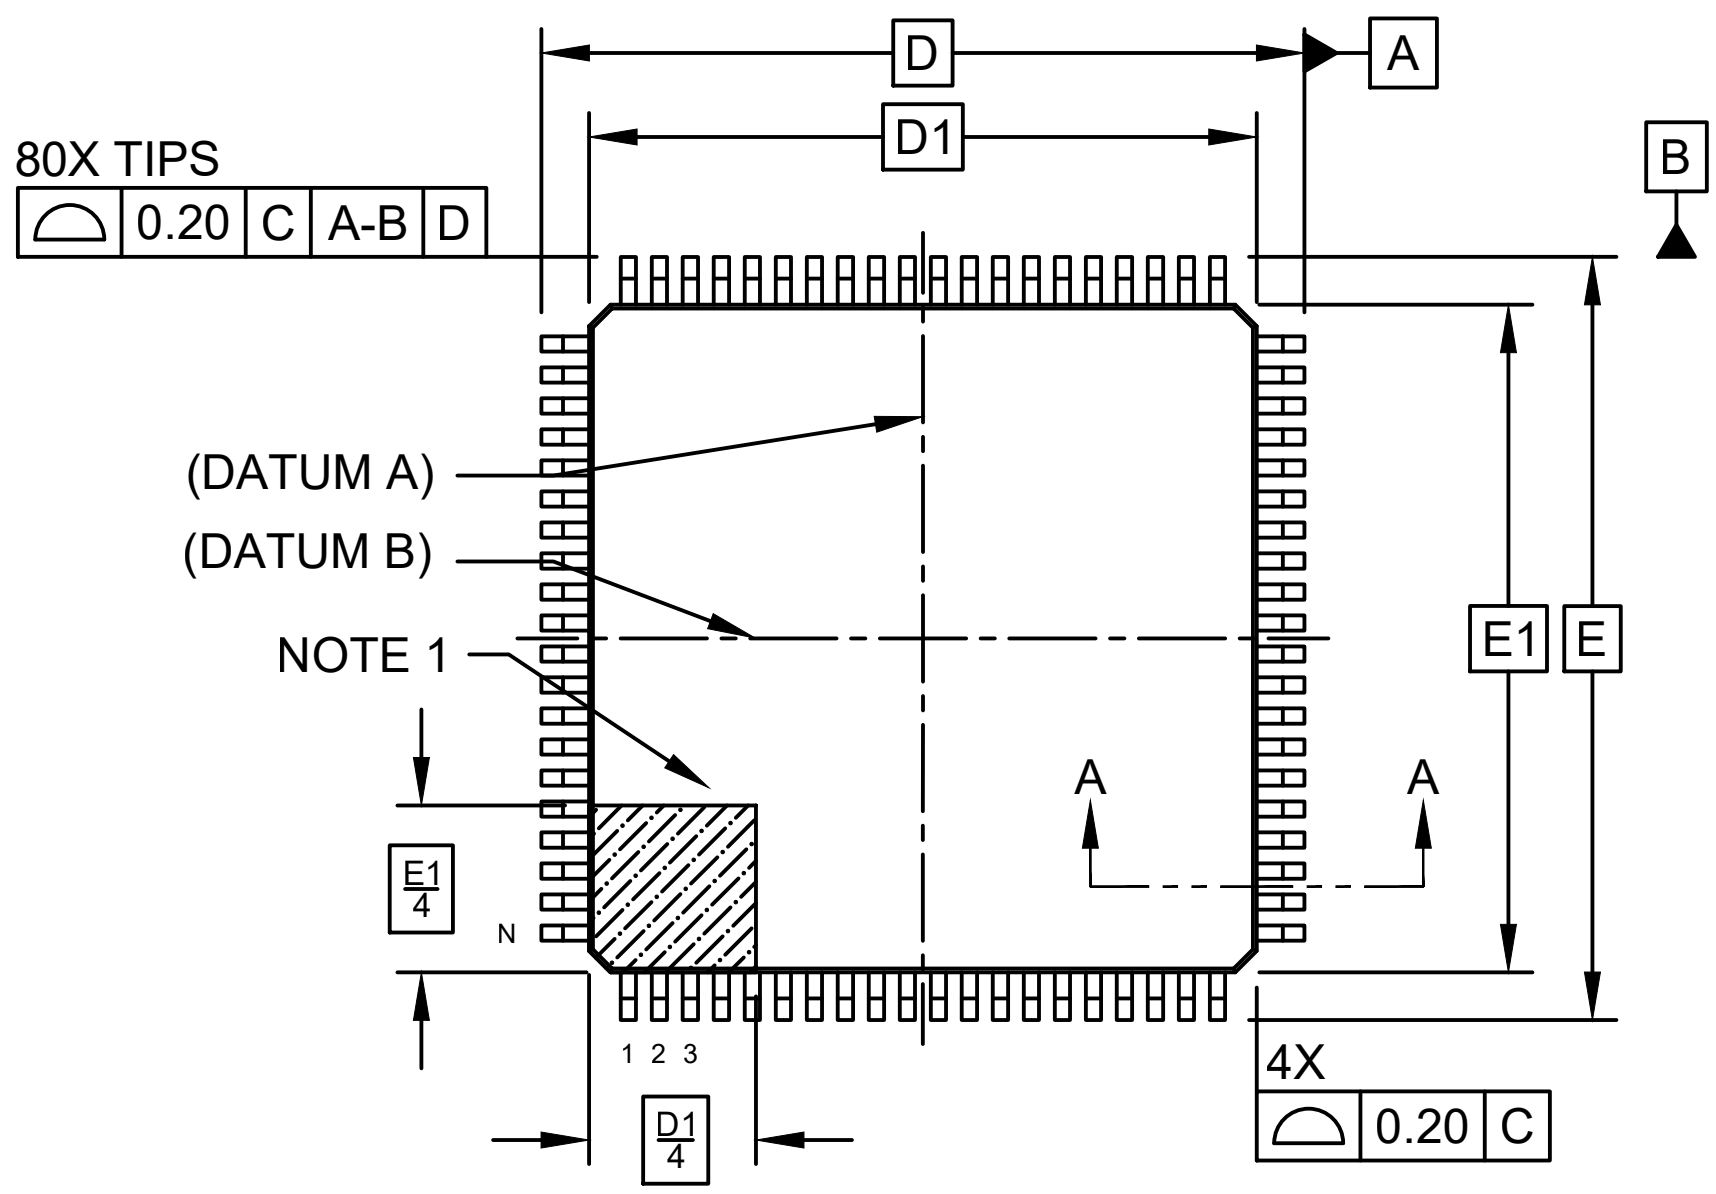


TOP VIEW

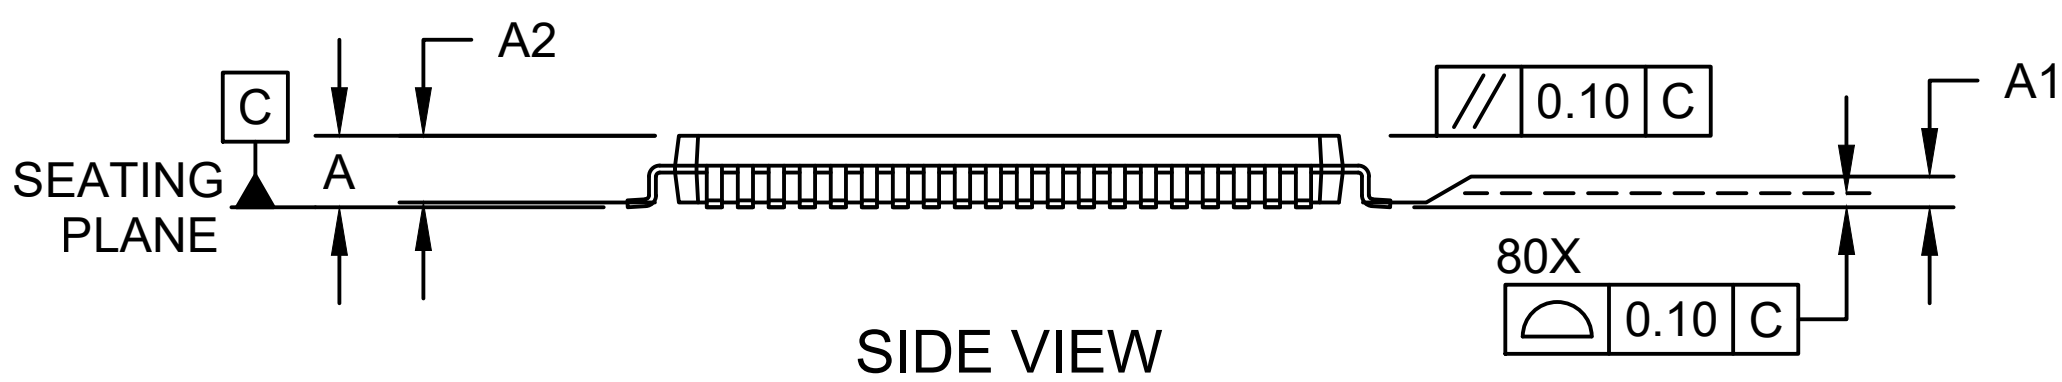


SIDE VIEW

Microchip Technology Drawing C04-00054 (PL) Rev B Sheet 1 of 2

## 80-Lead Low-Profile Plastic Quad Flat Pack (PL) - 14x14x1.4 mm Body [LQFP]

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

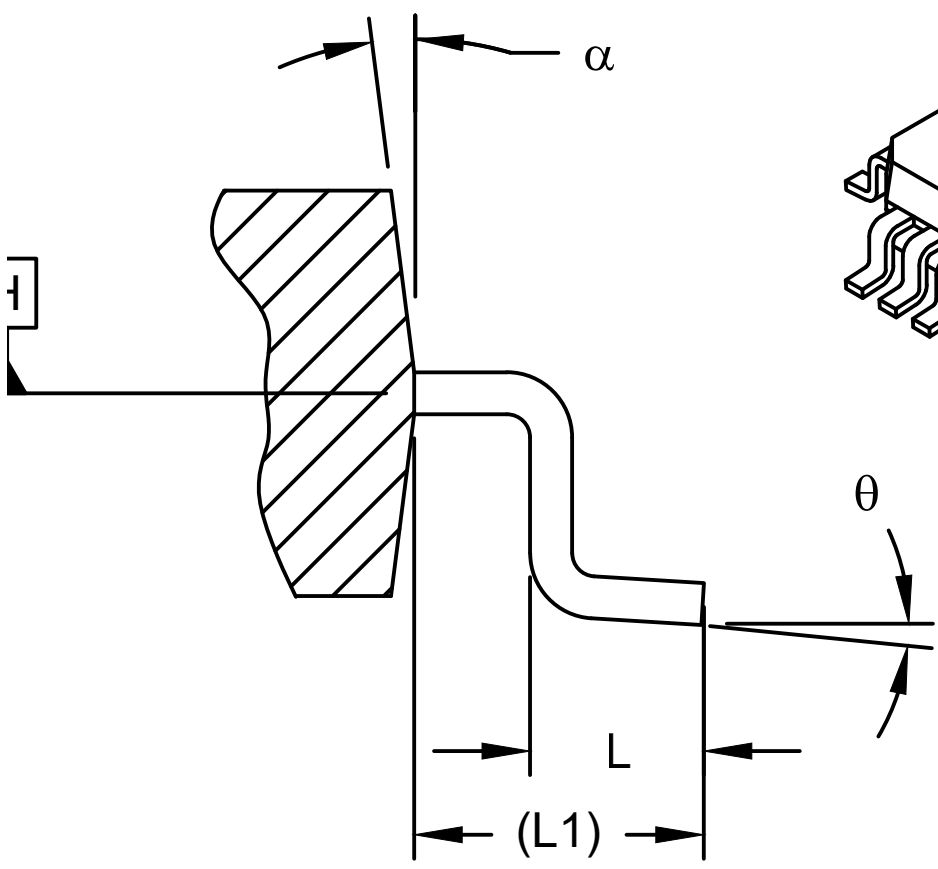


SECTION A-A

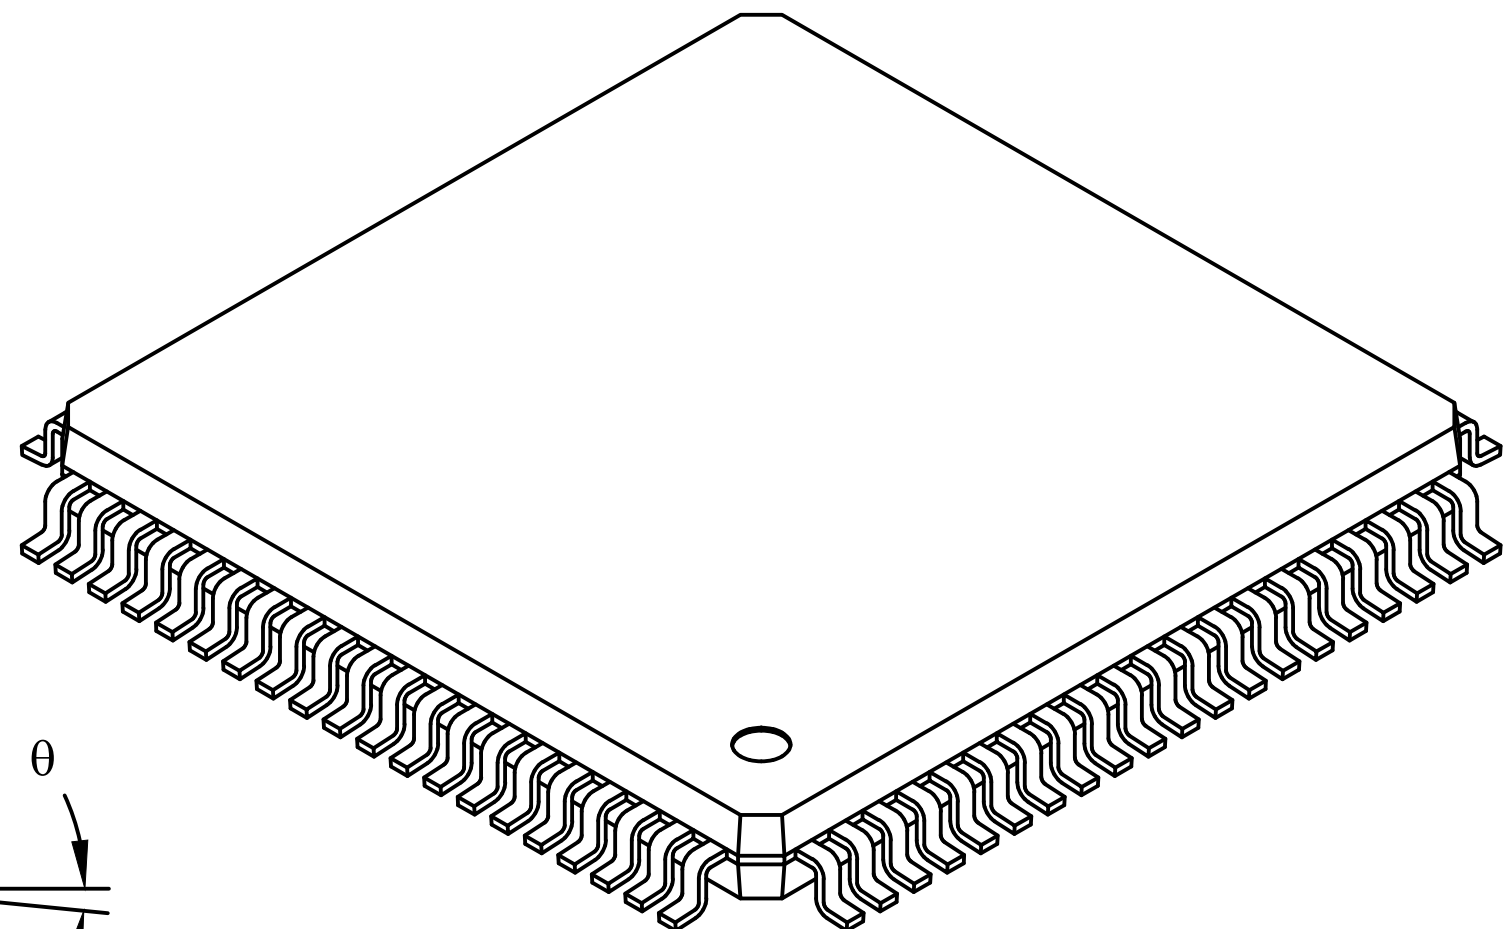

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Leads | N | 80 | | |
| Lead Pitch | e | 0.65 BSC | | |
| Overall Height | A | - | - | 1.60 |
| Standoff | A1 | 0.05 | - | 0.15 |
| Molded Package Thickness | A2 | 1.35 | 1.40 | 1.45 |
| Foot Length | L | 0.45 | 0.60 | 0.75 |
| Footprint | L1 | 1.00 REF | | |
| Foot Angle | θ | 0° | 3.5° | 7° |
| Overall Length | D | 16.00 BSC | | |
| Overall Width | E | 16.00 BSC | | |
| Molded Package Length | D1 | 14.00 BSC | | |
| Molded Package Width | E1 | 14.00 BSC | | |
| Lead Width | b | 0.22 | 0.32 | 0.38 |
| Mold Draft Angle Top | α | 5° | - | 16° |

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
   REF: Reference Dimension, usually without tolerance, is for information purposes only.

Microchip Technology Drawing C04-00054 (PL) Rev B Sheet 2 of 2

# Land Pattern

## 80-Lead Low-Profile Plastic Quad Flat Pack (PL) - 14x14x1.4 mm Body [LQFP]

| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |
|---|---|

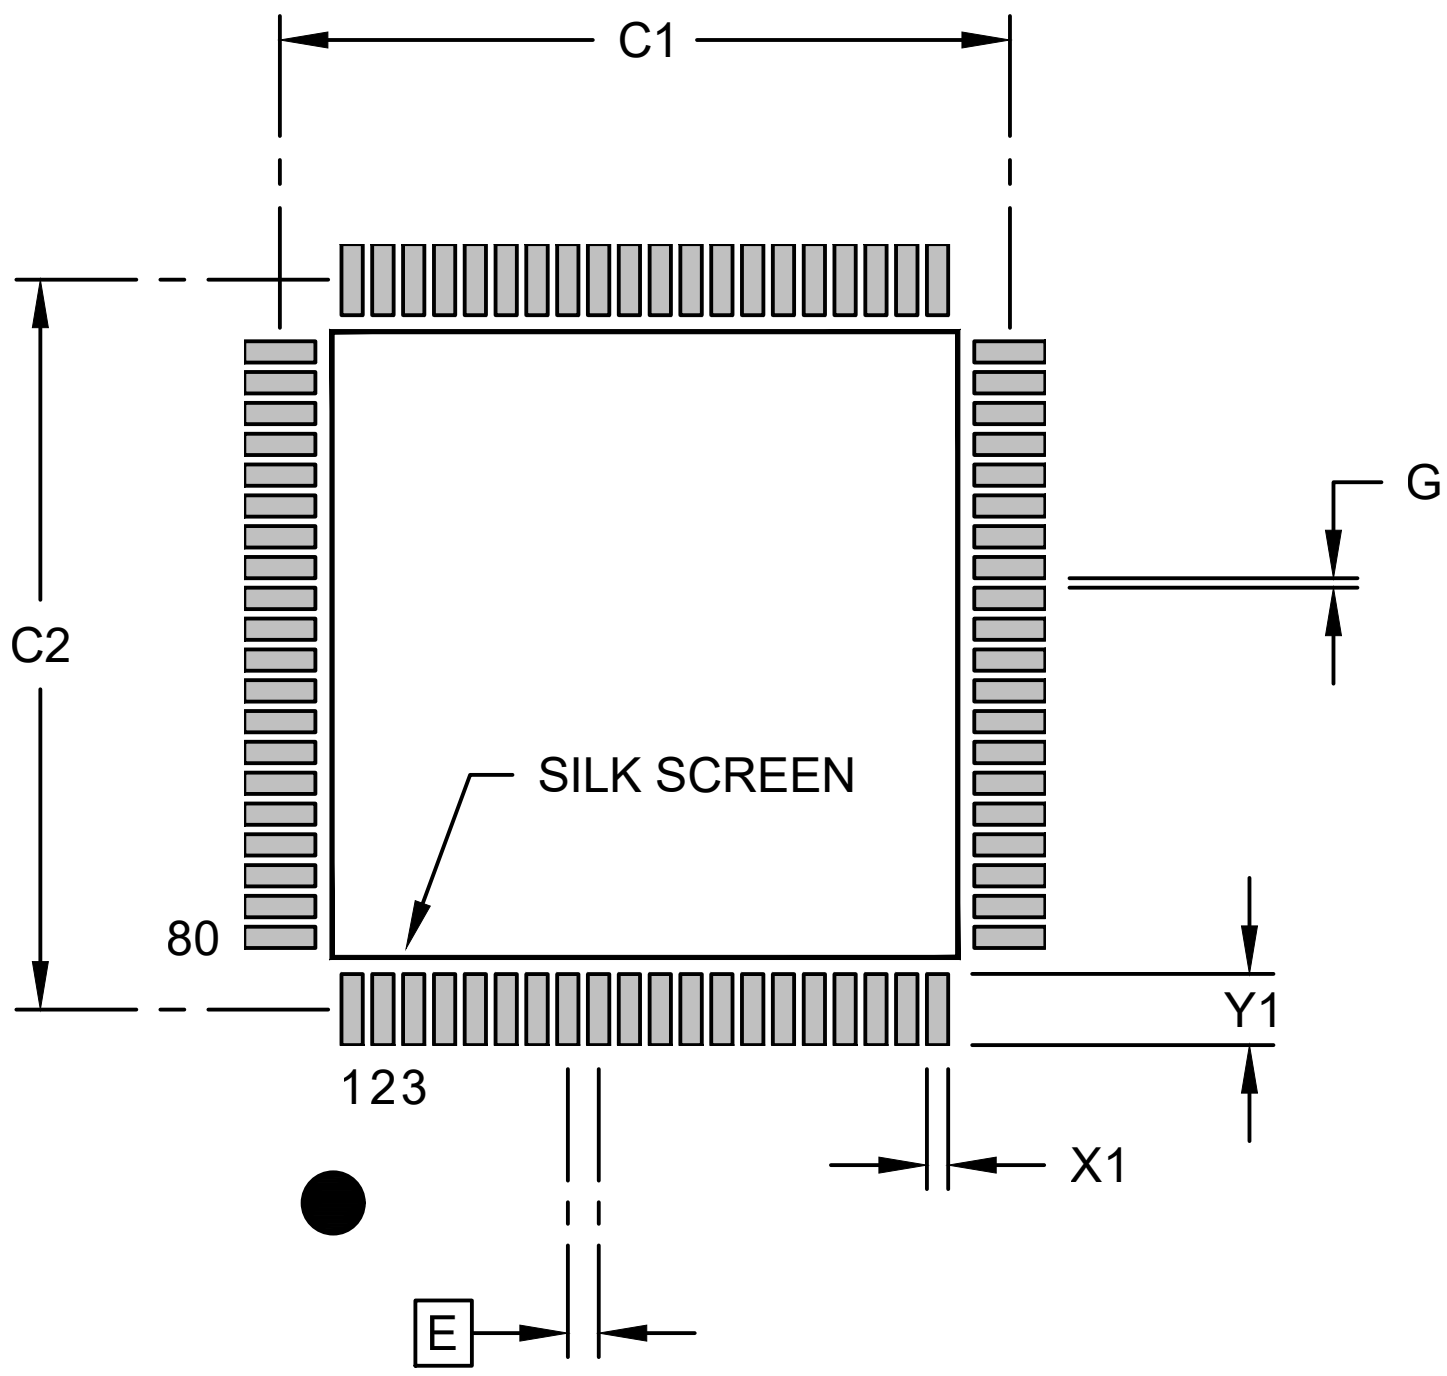


RECOMMENDED LAND PATTERN

| | | Units | MILLIMETERS | | |
|---|---|---|---|---|---|
| Dimension Limits | | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.65 BSC | | |
| Contact Pad Spacing | C1 | | | 15.40 | |
| Contact Pad Spacing | C2 | | | 15.40 | |
| Contact Pad Width (X80) | X1 | | | | 0.45 |
| Contact Pad Length (X80) | Y1 | | | | 1.50 |
| Contact Pad to Center Pad (X76) | G | | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-02054 (PL) Rev B

## 80-Lead Low-Profile Plastic Quad Flat Pack (PT) - 14x14x1.4 mm Body [LQFP]

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

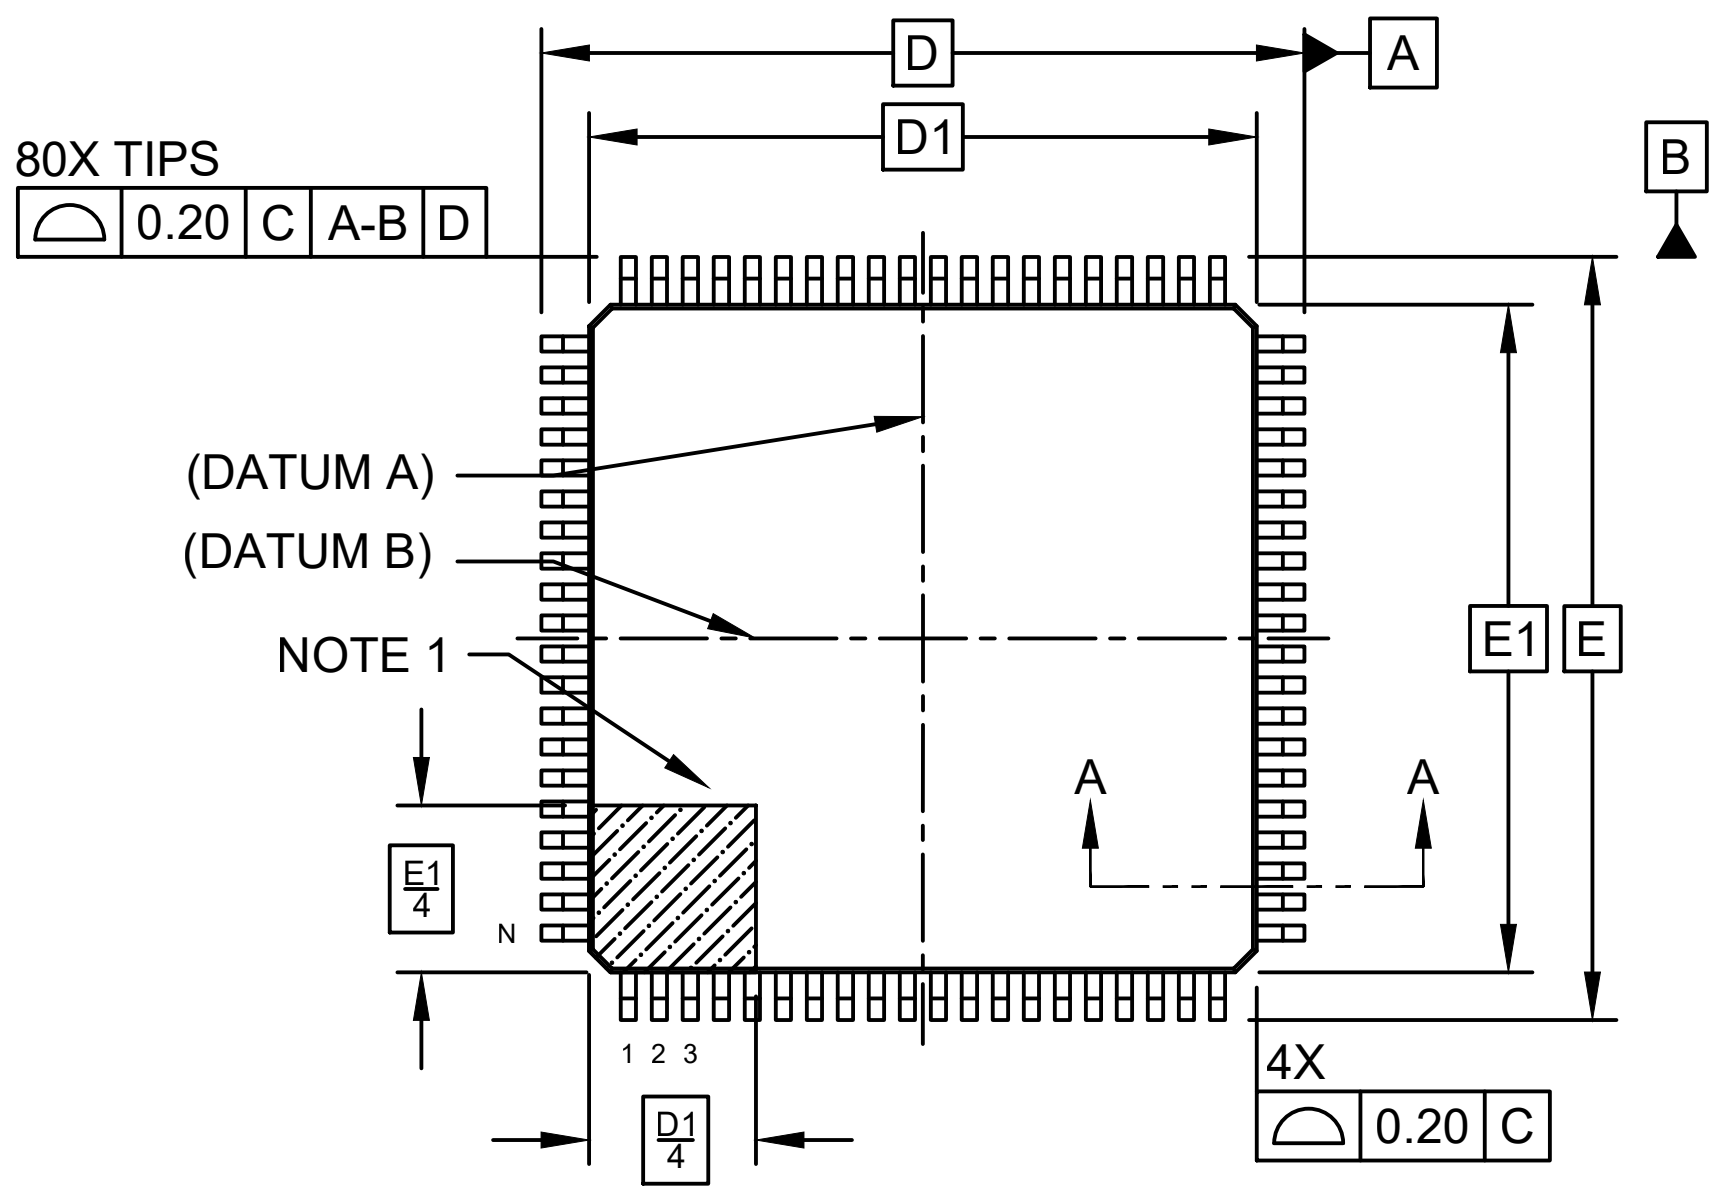


TOP VIEW

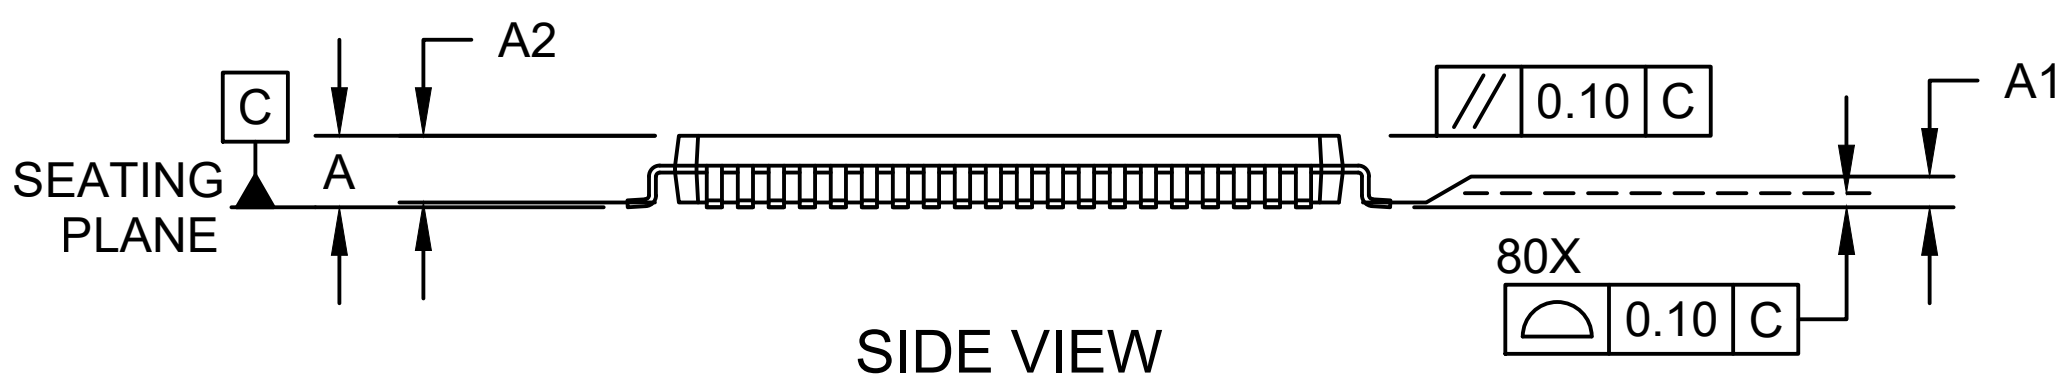


SIDE VIEW

Microchip Technology Drawing C04-00054 (PT) Rev B Sheet 1 of 2

## 80-Lead Low-Profile Plastic Quad Flat Pack (PT) - 14x14x1.4 mm Body [LQFP]

| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |
|---|---|

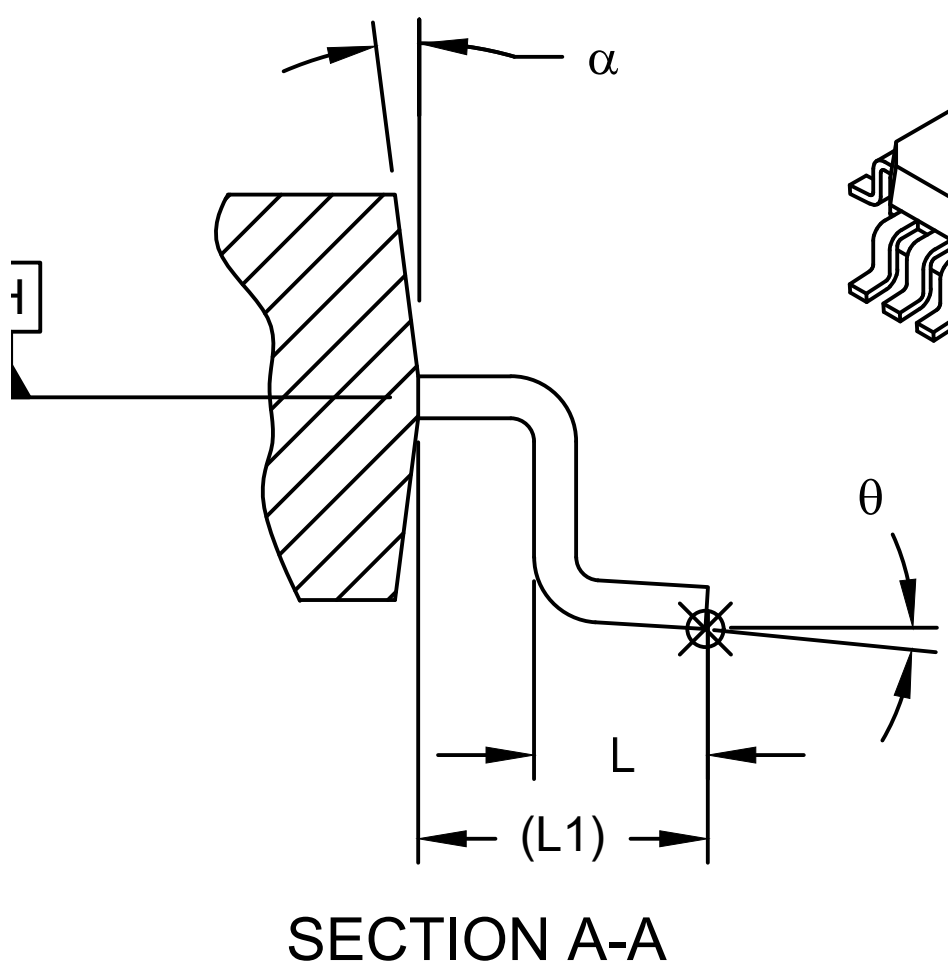


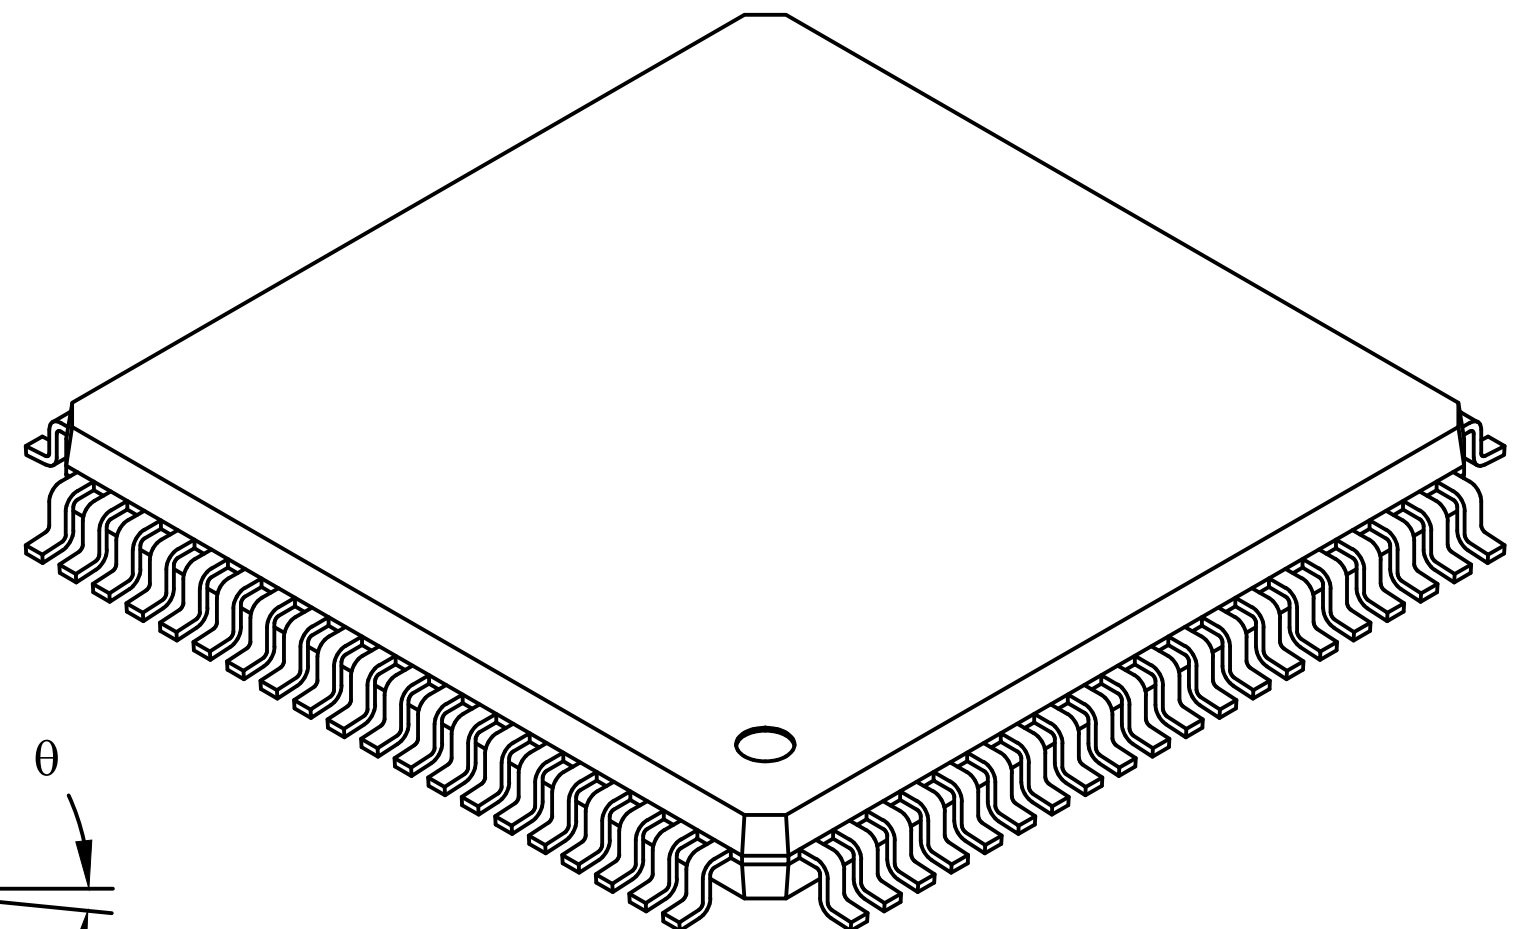

| | | Units | MILLIMETERS | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Leads | N | | 80 | |
| Lead Pitch | e | | 0.65 BSC | |
| Overall Height | A | - | - | 1.60 |
| Standoff | A1 | 0.05 | - | 0.15 |
| Molded Package Thickness | A2 | 1.35 | 1.40 | 1.45 |
| Foot Length | L | 0.45 | 0.60 | 0.75 |
| Footprint | L1 | | 1.00 REF | |
| Foot Angle | θ | 0° | 3.5° | 7° |
| Overall Length | D | | 16.00 BSC | |
| Overall Width | E | | 16.00 BSC | |
| Molded Package Length | D1 | | 14.00 BSC | |
| Molded Package Width | E1 | | 14.00 BSC | |
| Lead Width | b | 0.22 | 0.32 | 0.38 |
| Mold Draft Angle Top | α | 5° | - | 16° |

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.

   REF: Reference Dimension, usually without tolerance, is for information purposes only.

Microchip Technology Drawing C04-00054 (PT) Rev B Sheet 2 of 2

## 80-Lead Low-Profile Plastic Quad Flat Pack (PT) - 14x14x1.4 mm Body [LQFP]

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

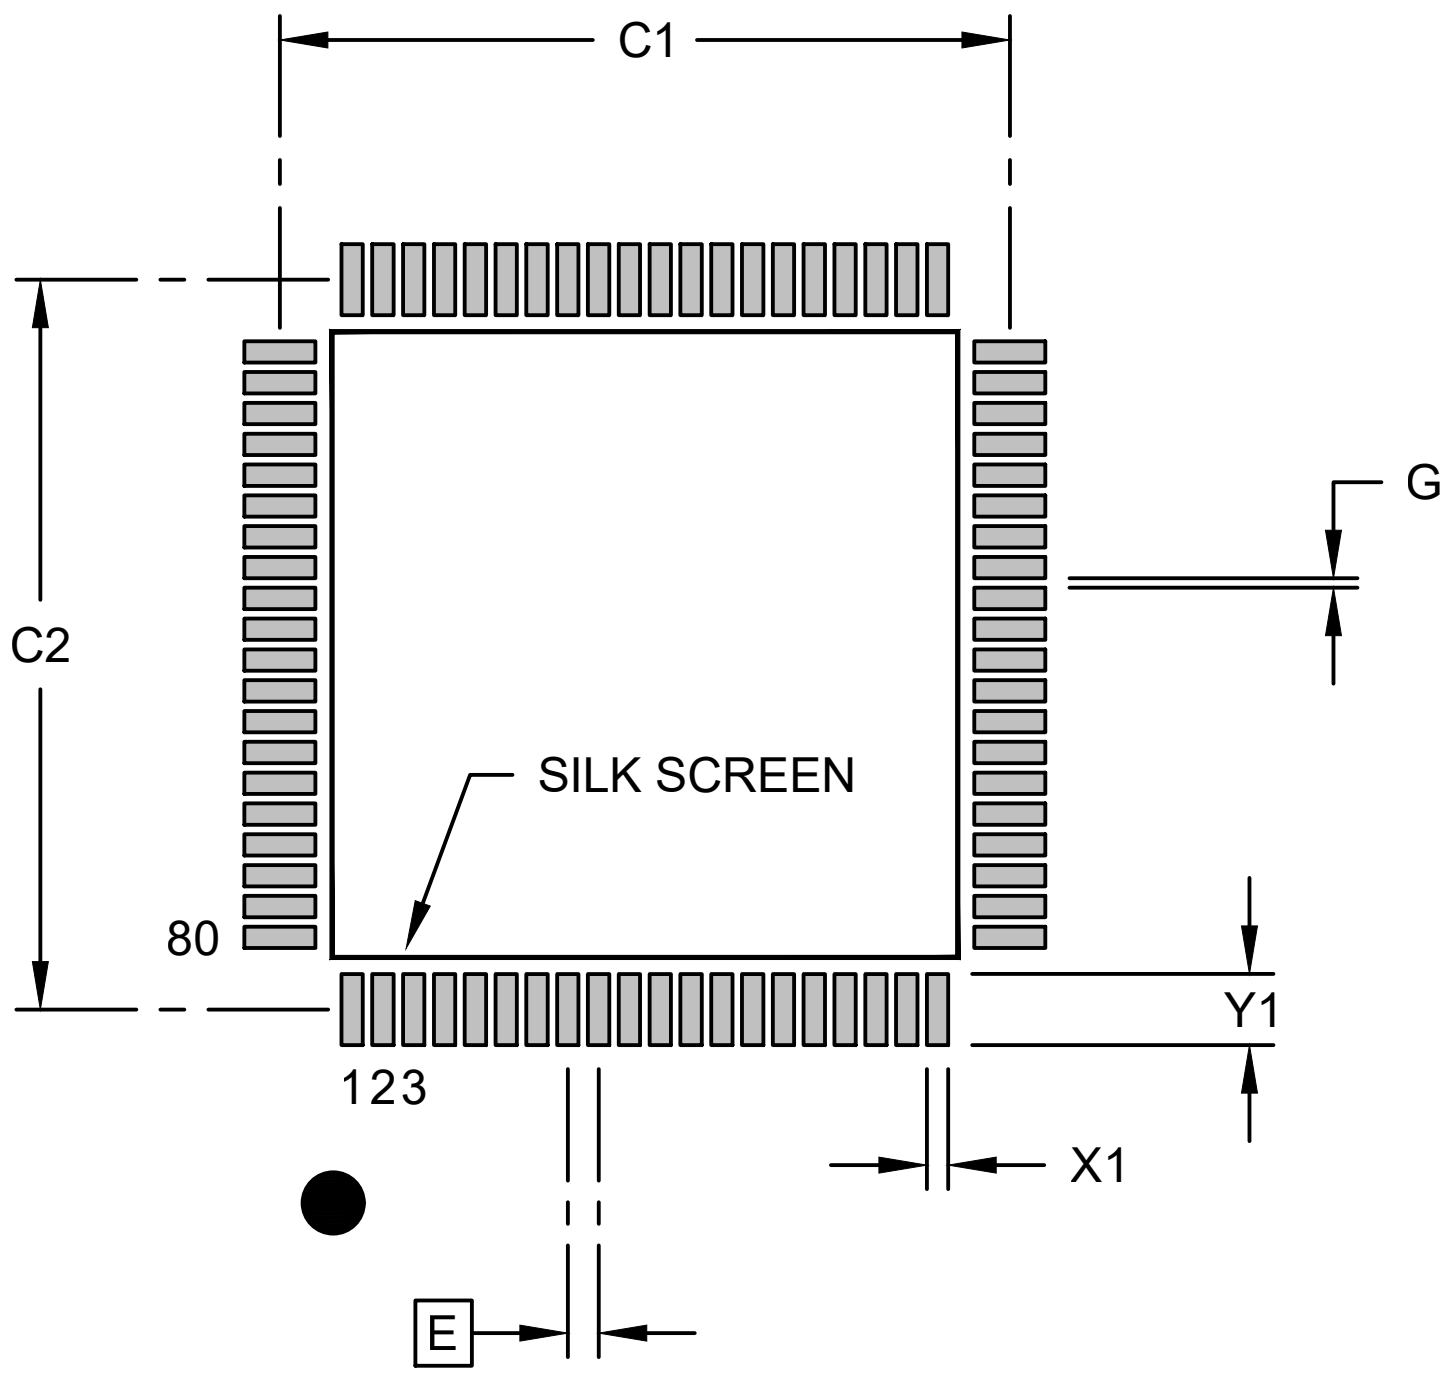


RECOMMENDED LAND PATTERN

| | Units | MILLIMETERS | | |
|---|---|---|---|---|
| | Dimension Limits | MIN | NOM | MAX |
| Contact Pitch | E | 0.65 BSC | | |
| Contact Pad Spacing | C1 | | 15.40 | |
| Contact Pad Spacing | C2 | | 15.40 | |
| Contact Pad Width (X80) | X1 | | | 0.45 |
| Contact Pad Length (X80) | Y1 | | | 1.50 |
| Contact Pad to Center Pad (X76) | G | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-02054 (PT) Rev B