28-Lead Small Outline Integrated Circuit (4WW) - 7.50 mm (.300 In.) Body [SOIC]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

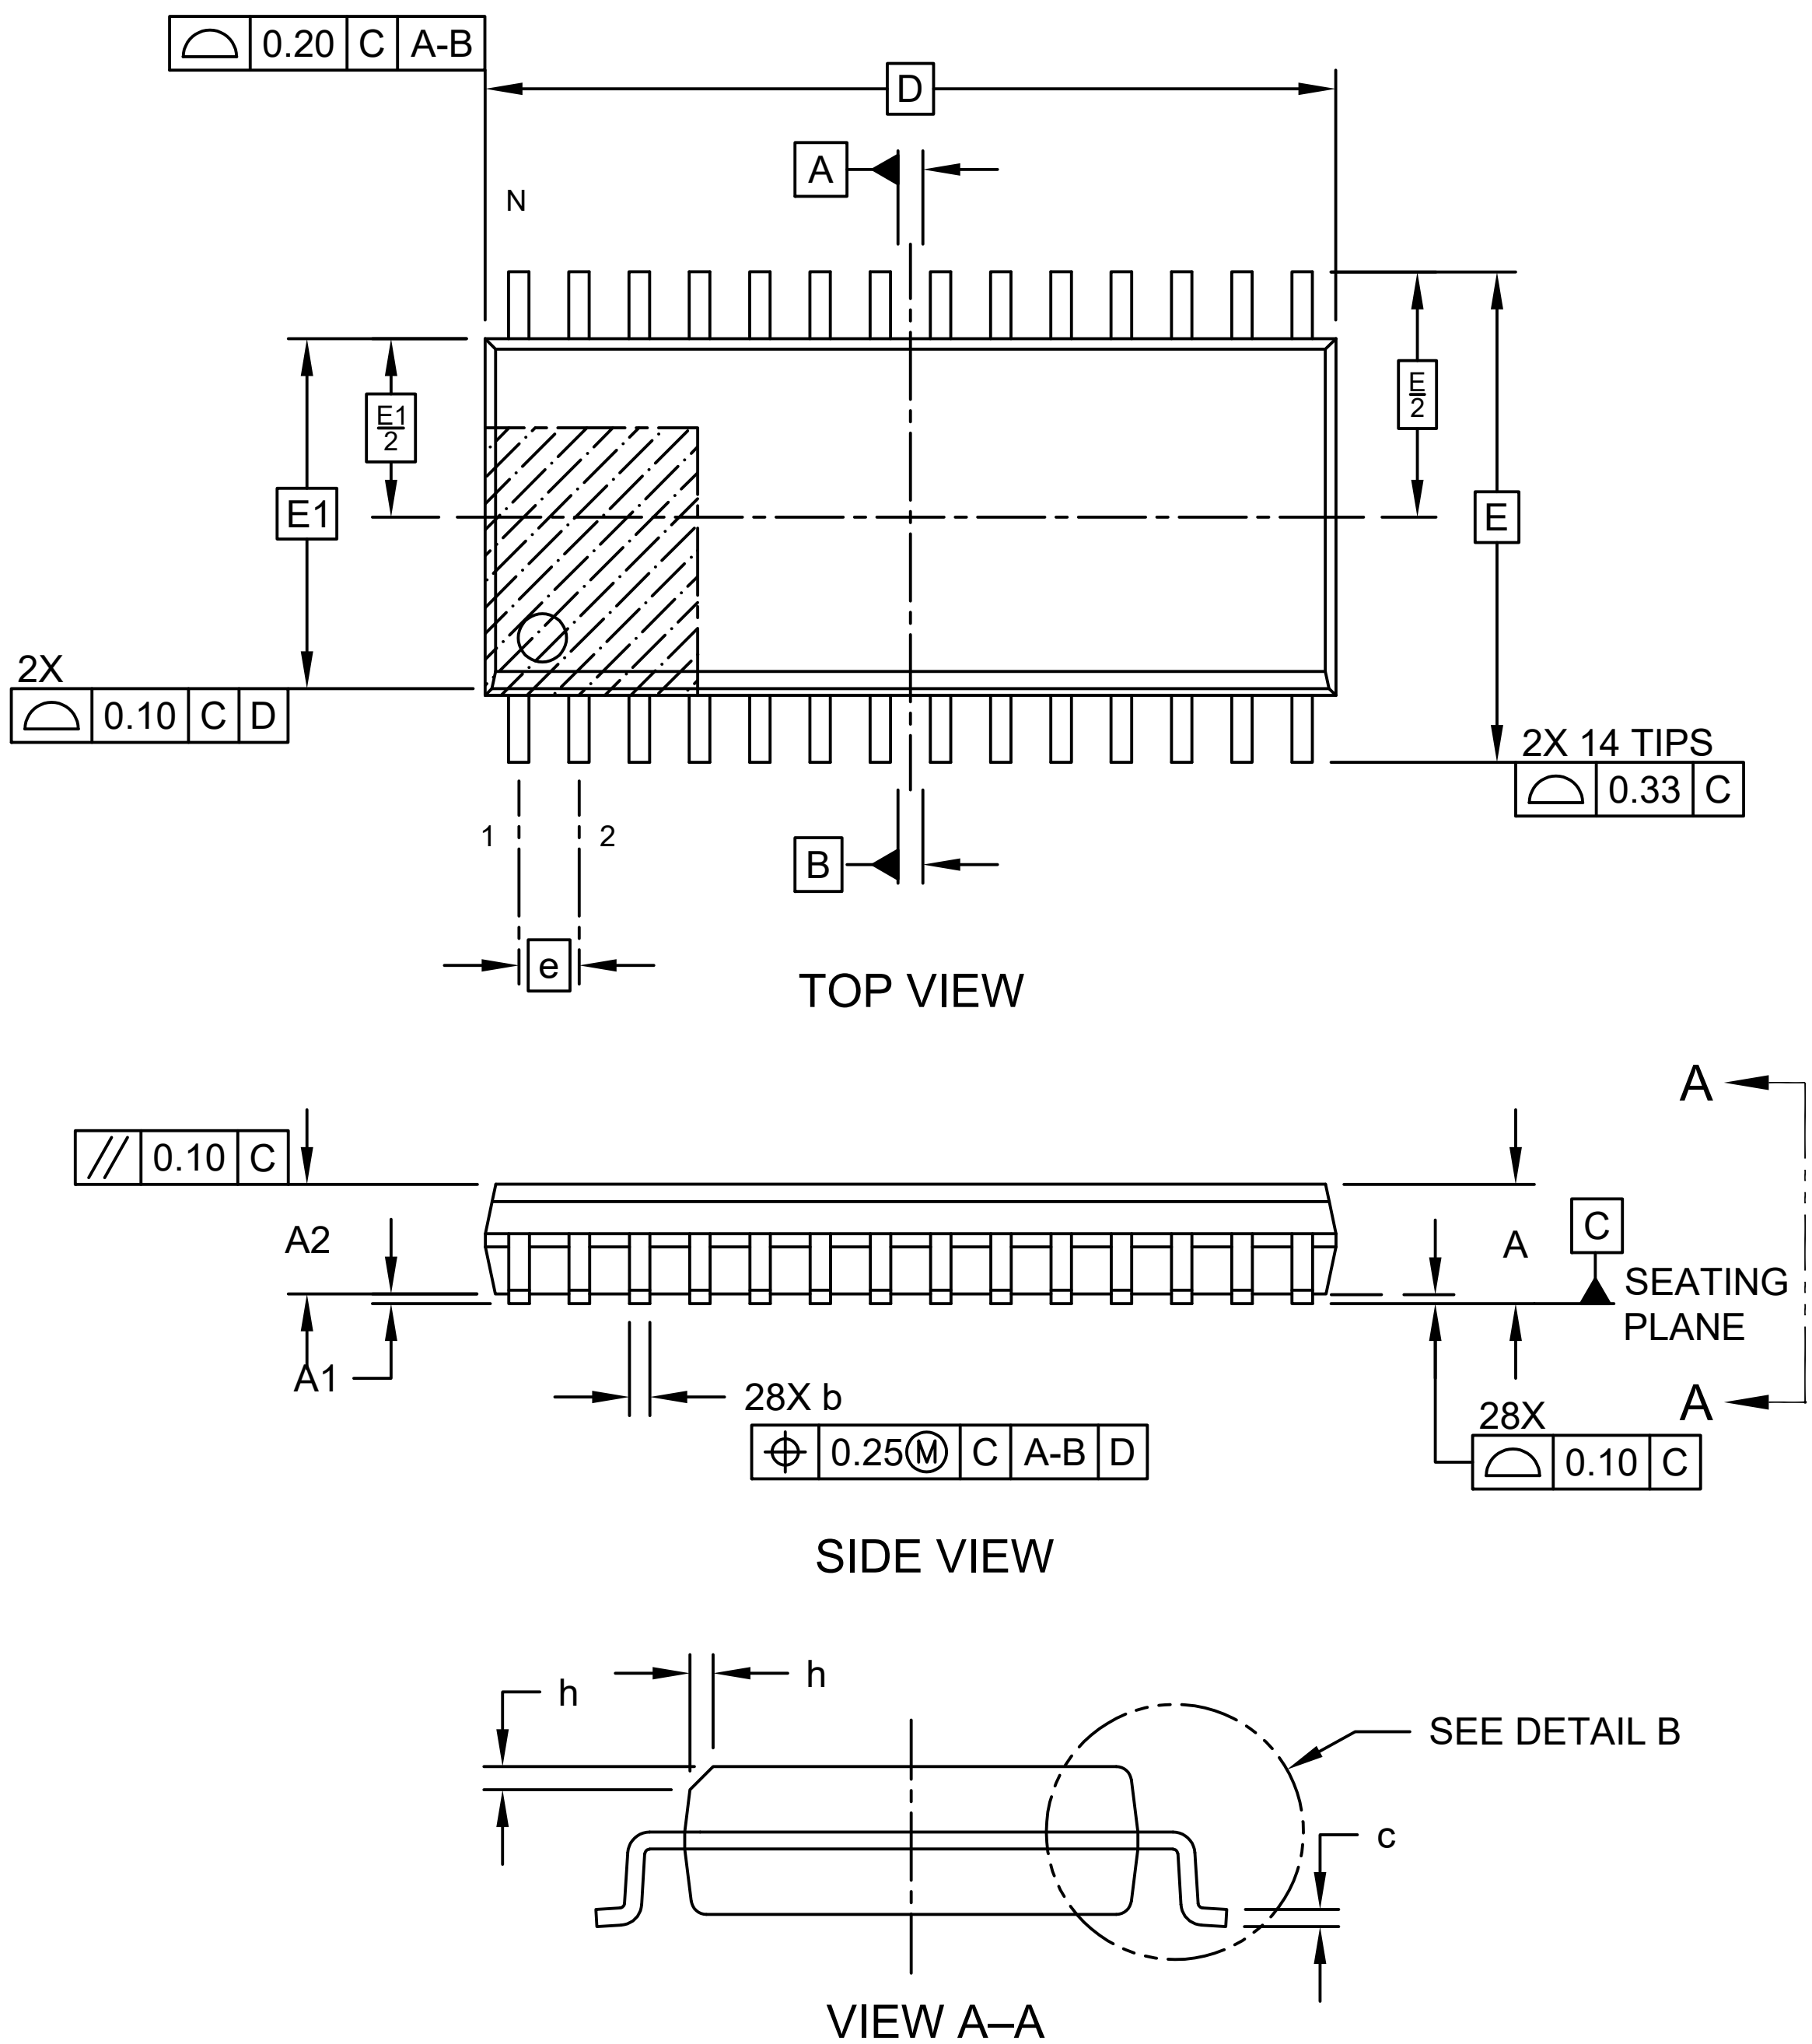

Microchip Technology Drawing C04-600 Rev A Sheet 1 of 2

© 2023 Microchip Technology Inc.

28-Lead Small Outline Integrated Circuit (4WW) - 7.50 mm (.300 In.) Body [SOIC]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

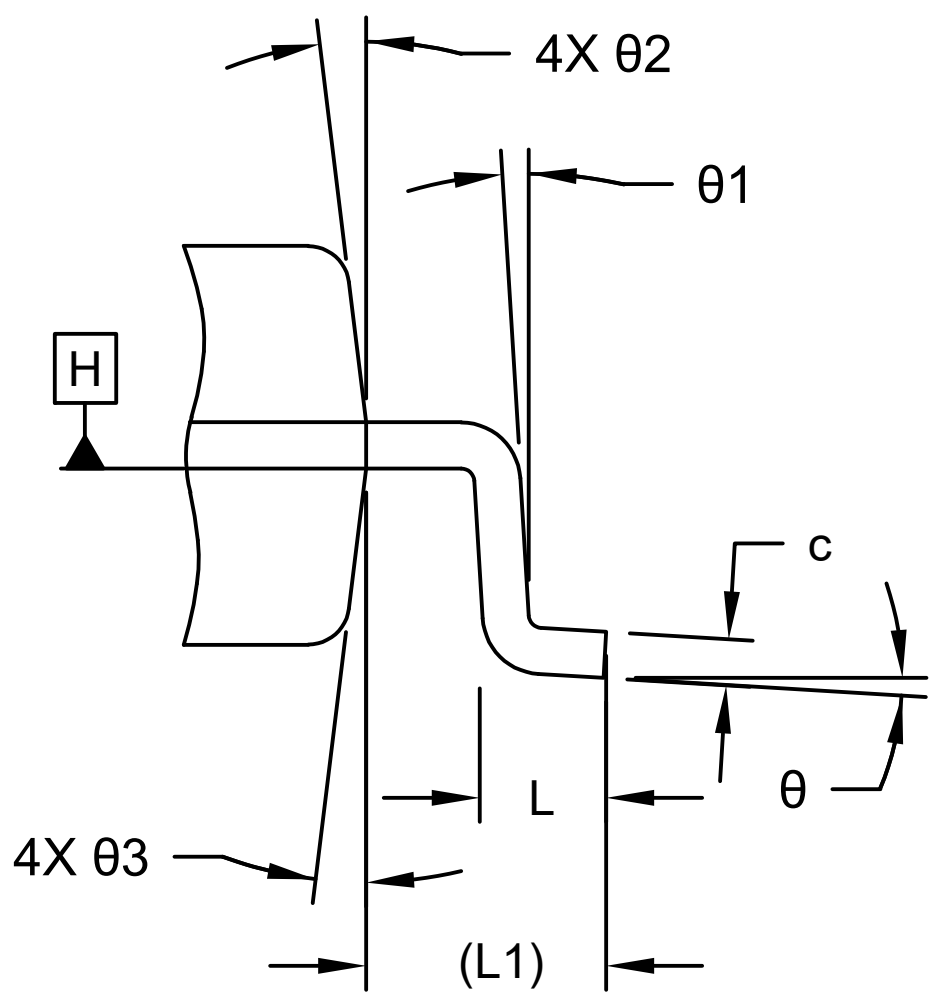

DETAIL B

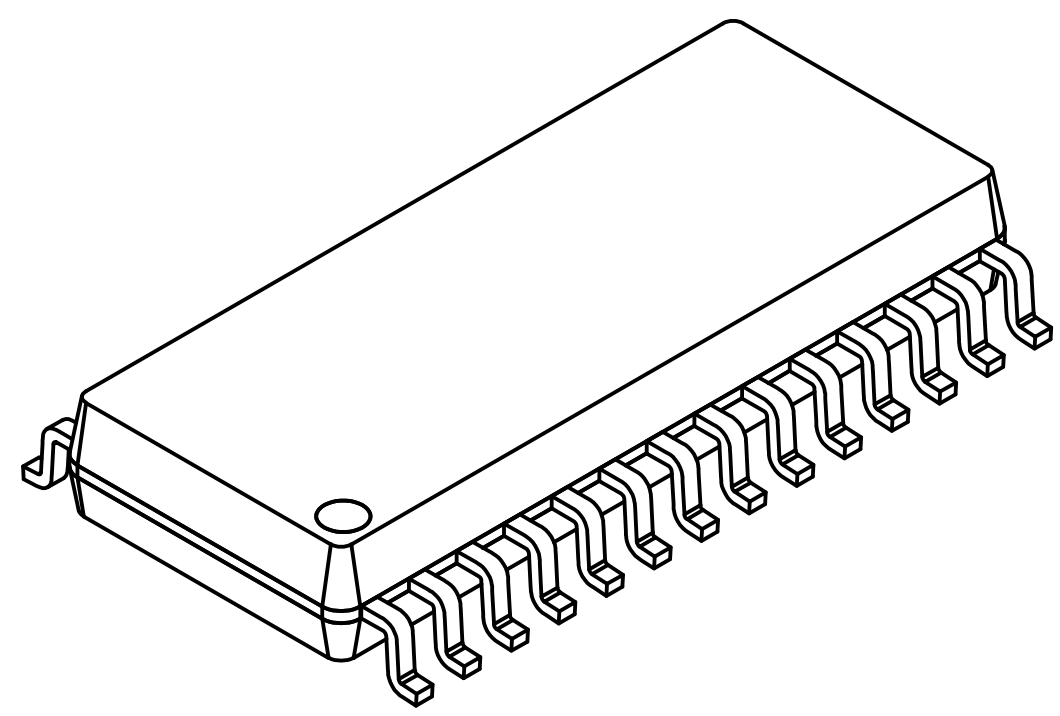

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	28		
Pitch	e	1.27 BSC		
Overall Height	A	–	–	2.65
Standoff	A1	0.10	–	0.30
Molded Package Thickness	A2	2.05	–	–
Overall Length	D	17.90 BSC		
Overall Width	E	10.30 BSC		
Molded Package Width	E1	7.50 BSC		
Terminal Width	b	0.31	–	0.51
Terminal Thickness	c	0.18	–	0.33
Corner Chamfer	h	0.25	–	0.75
Footprint	L	0.40	–	1.27
Terminal Length	L1	1.40 REF		
Foot Angle	θ	0°	-	8°
Lead Angle	θ1	0°	-	-
Mold Draft Angle	θ2	5°	-	15°
Mold Draft Angle	θ3	5°	-	15°

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-600 Rev A Sheet 2 of 2

© 2023 Microchip Technology Inc.

28-Lead Small Outline Integrated Circuit (4WW) - 7.50 mm (.300 In.) Body [SOIC]

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

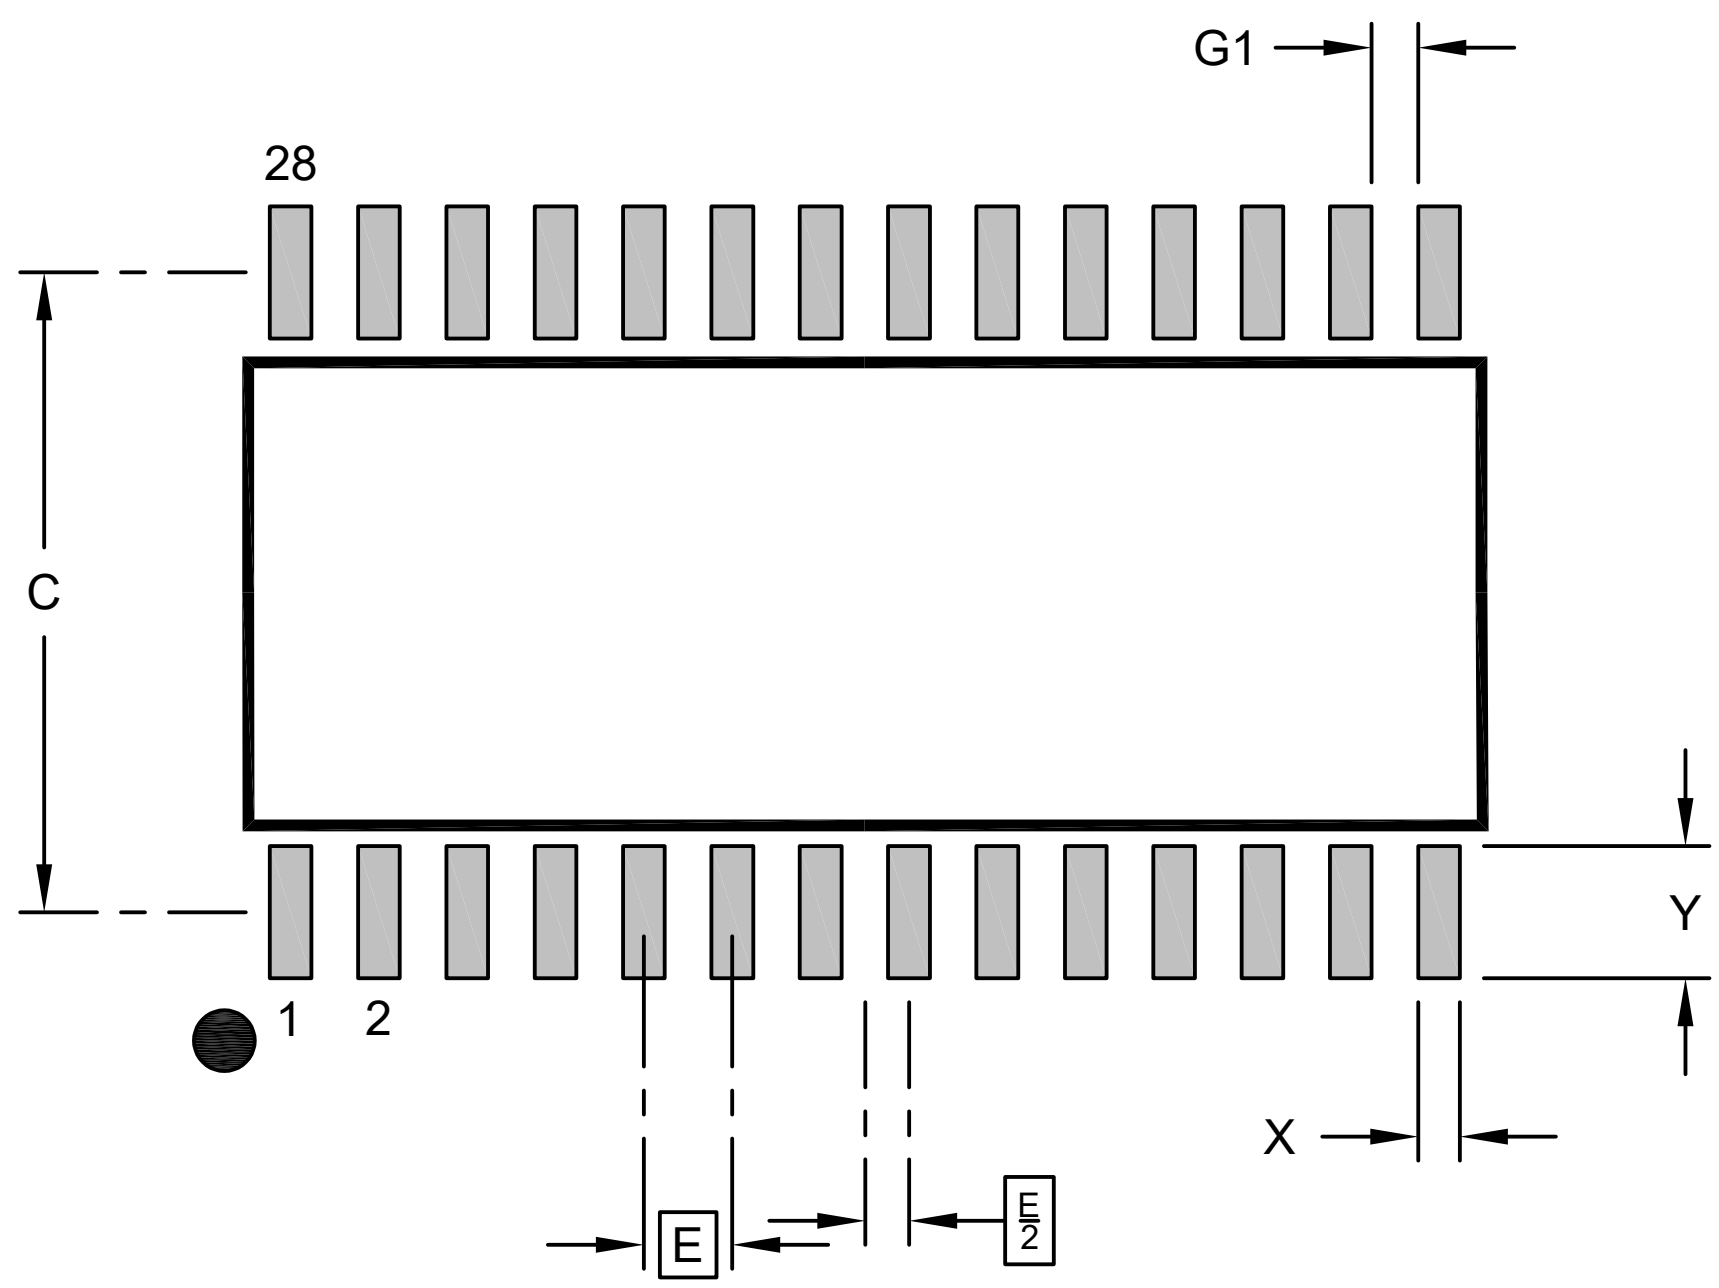

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		1.27 BSC	
Contact Pad Width (X28)	X			0.60
Contact Pad Length (X28)	Y			1.90
Contact Pad Spacing	C		9.20	
Contact Pad to Contact Pad (X26)	G1		0.67	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2600 Rev A

© 2023 Microchip Technology Inc.