208-Lead Plastic Quad Flat Pack (KXB) - 28x28x3.32 mm Body [PQFP] - 1.6mm Form Opt

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

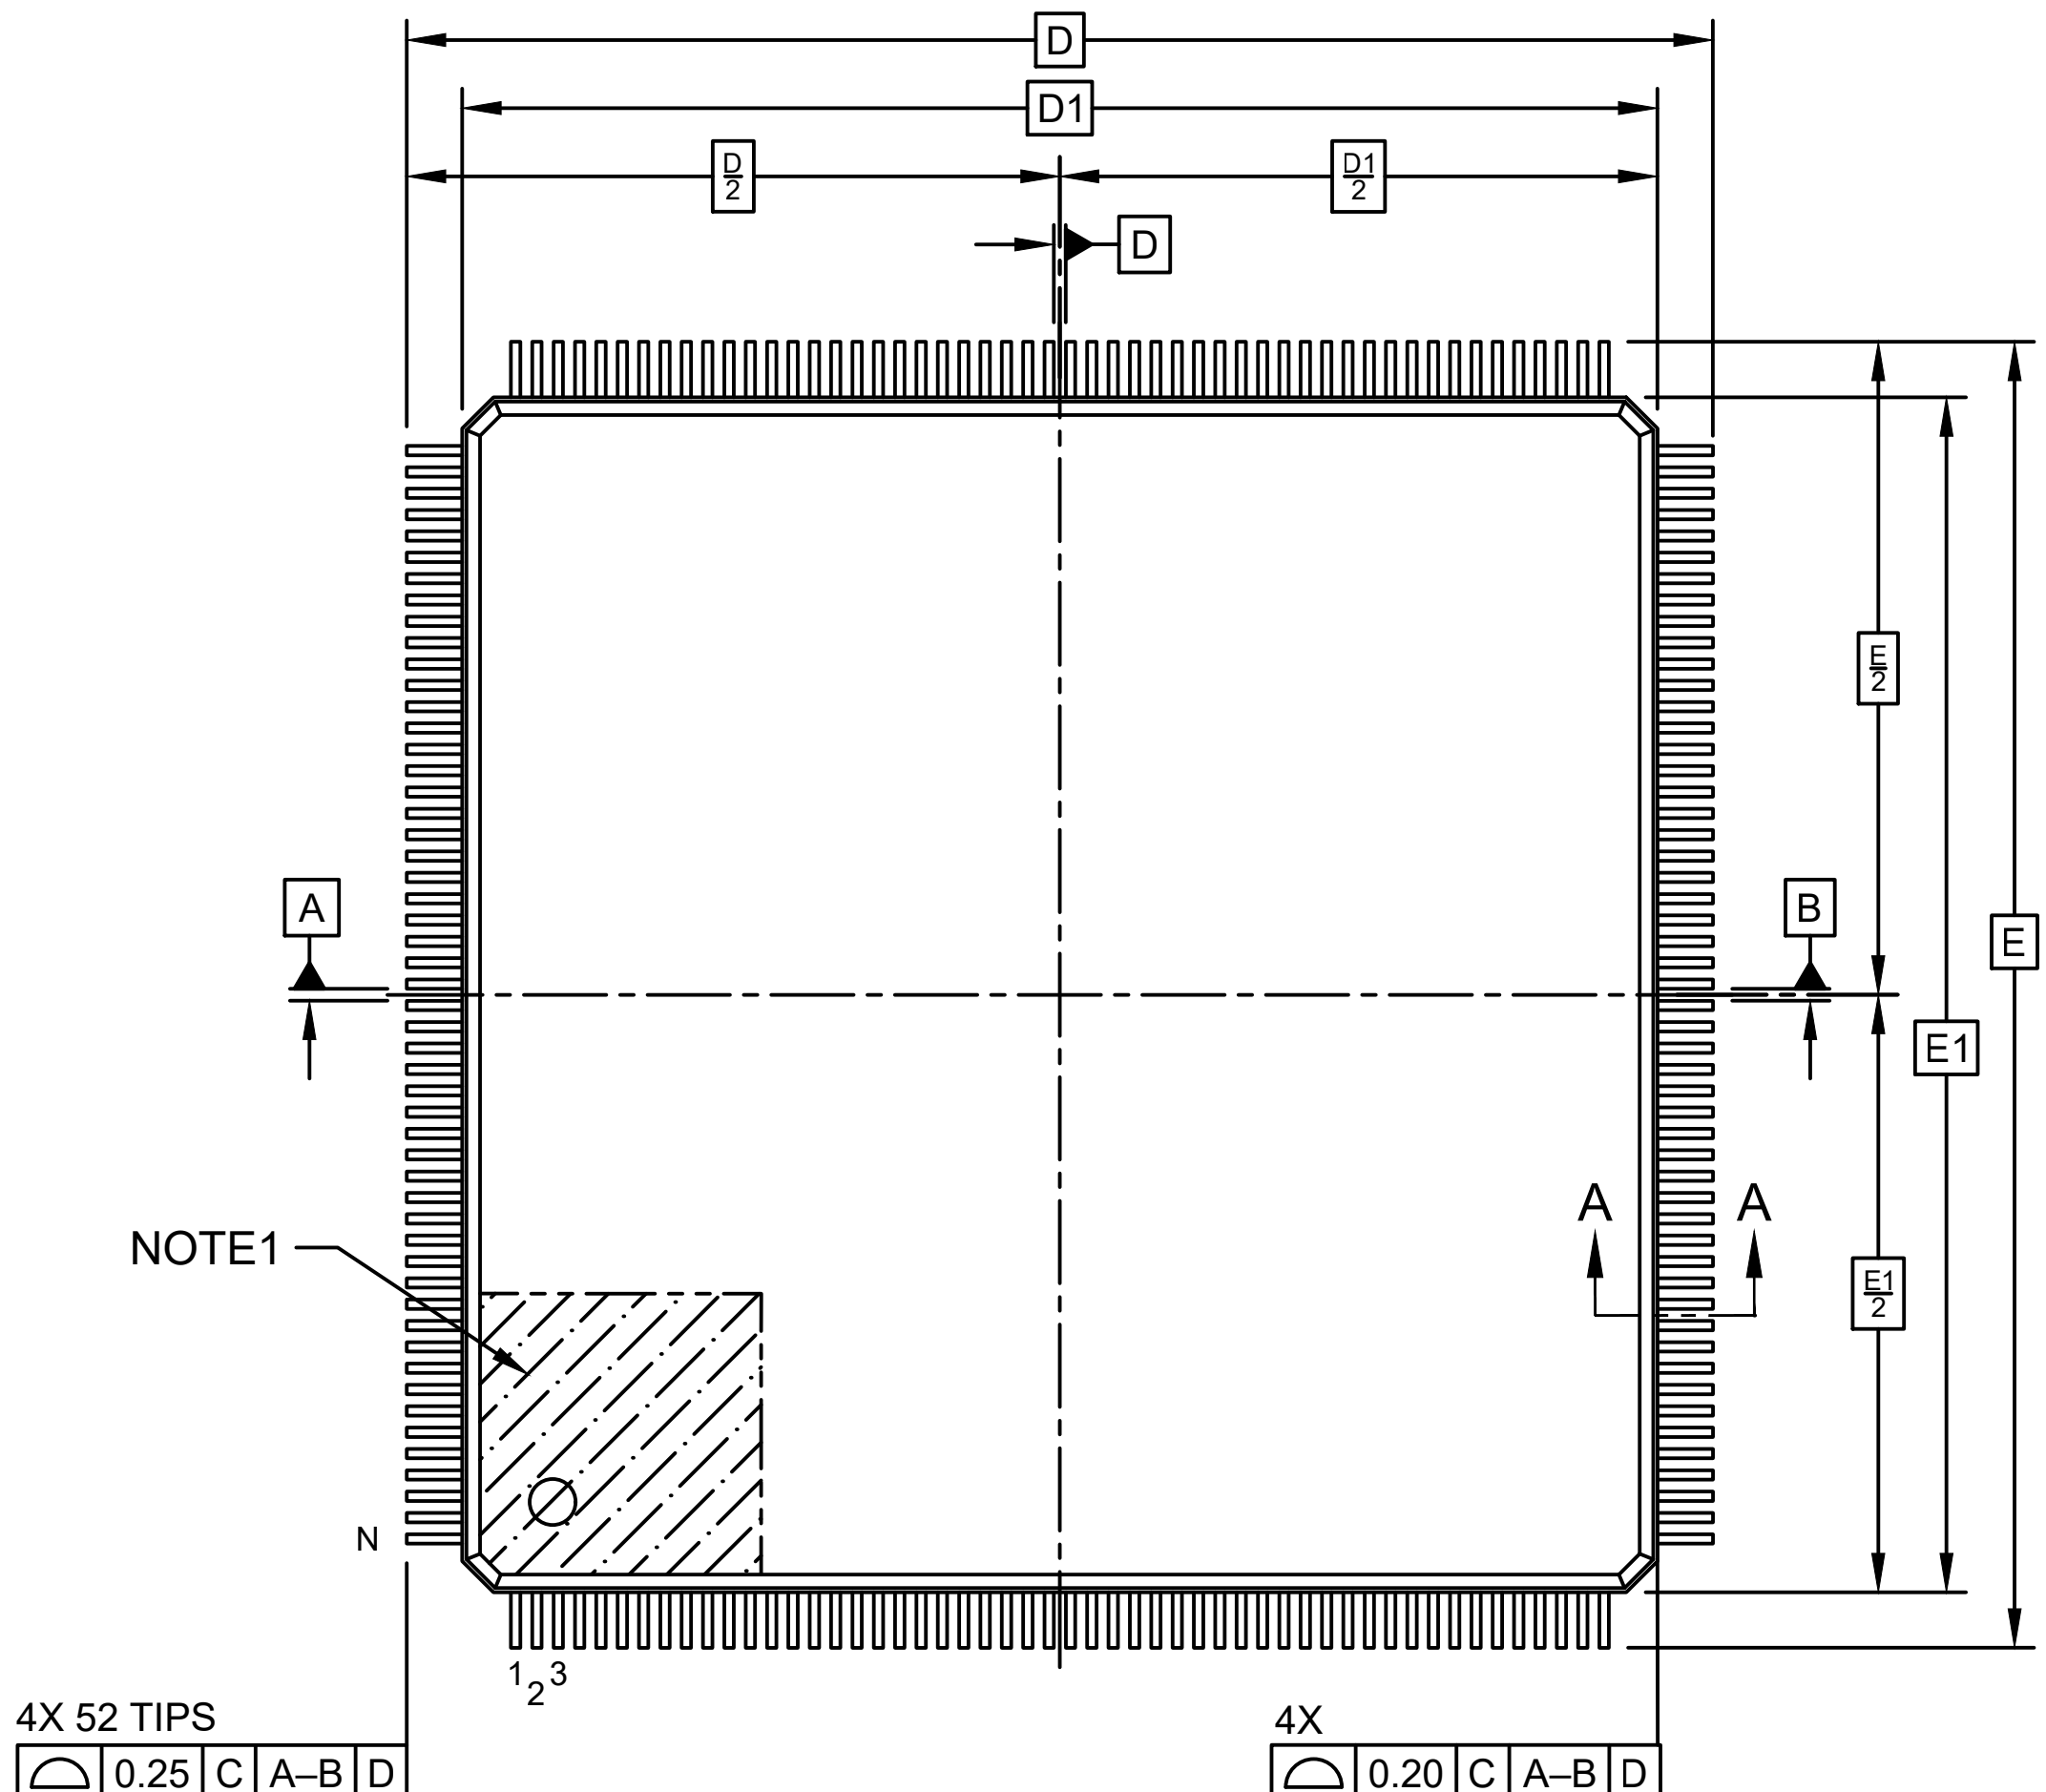

TOP VIEW

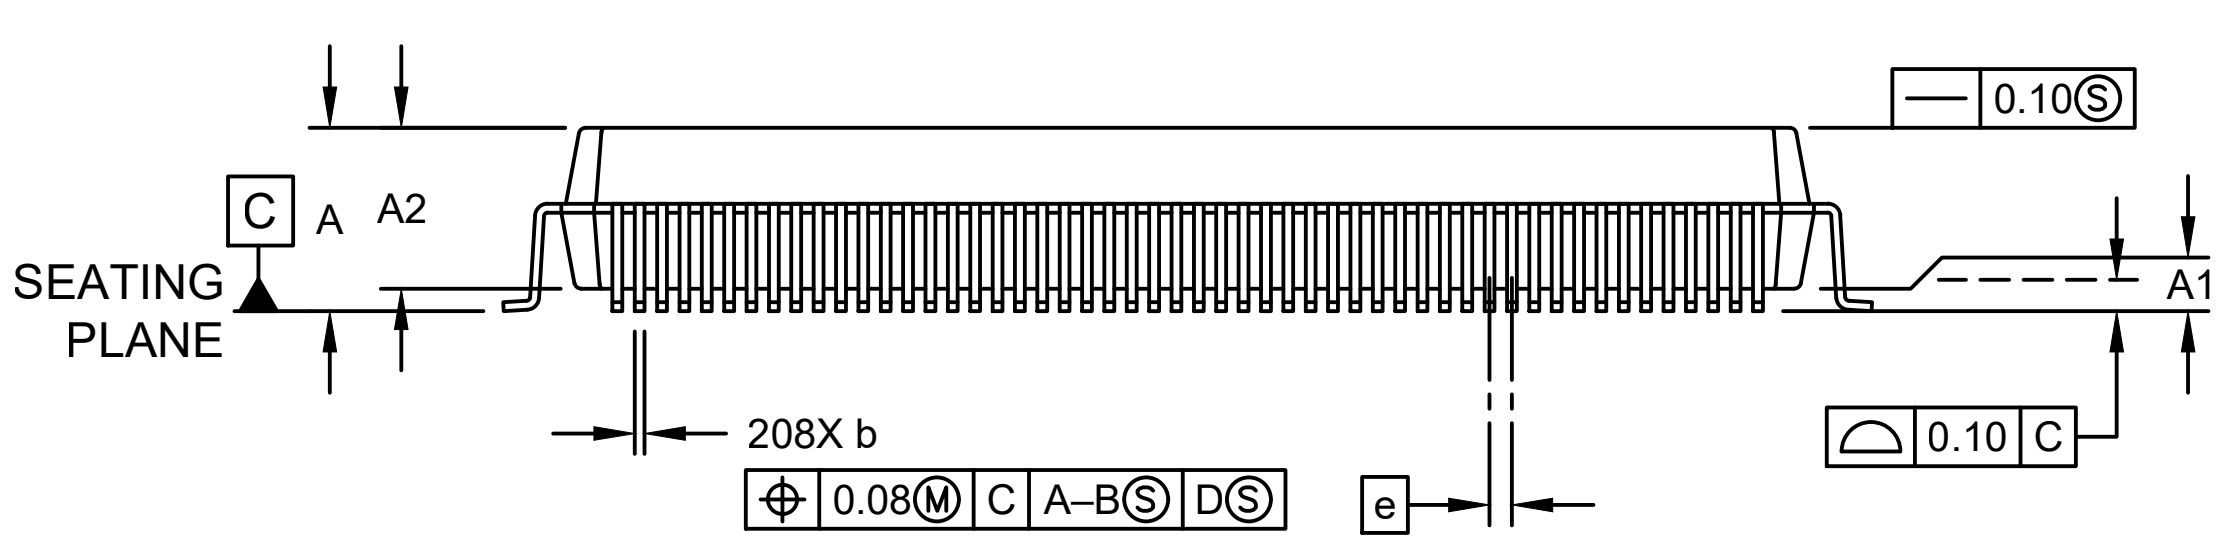

SIDE VIEW

Microchip Technology Drawing C04-21300 Rev A Sheet 1 of 2

Packaging Diagrams and Parameters

208-Lead Plastic Quad Flat Pack (KXB) - 28x28x3.32 mm Body [PQFP] - 1.6mm Form Opt

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

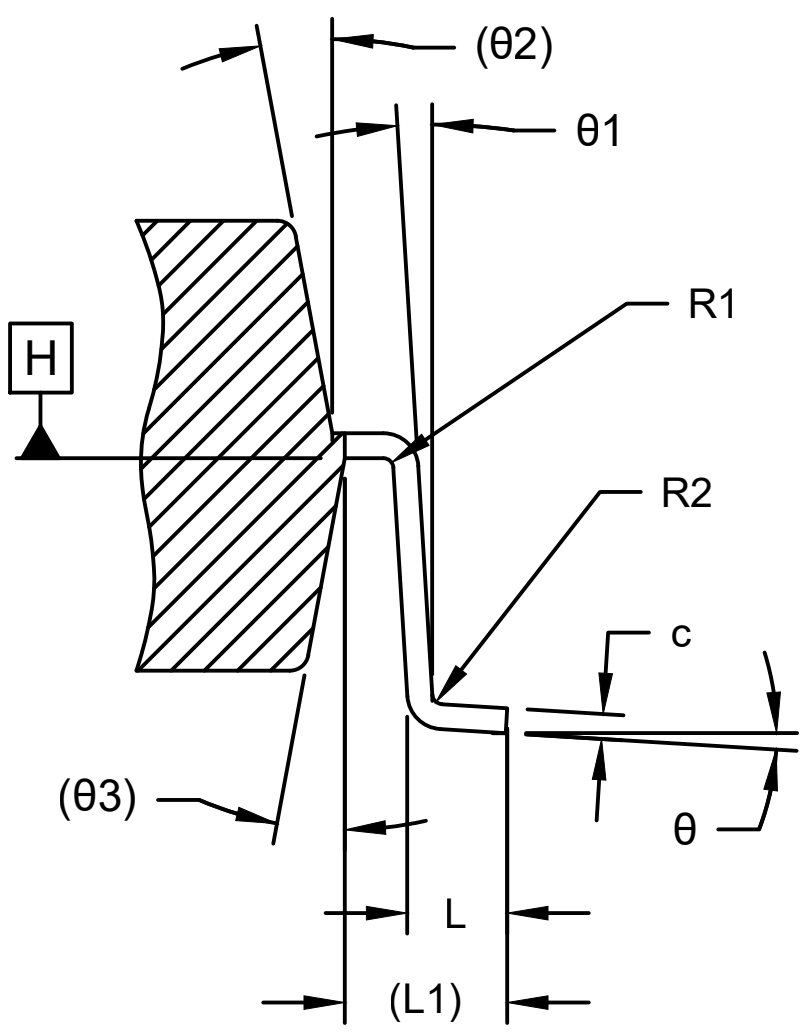

SECTION A–A

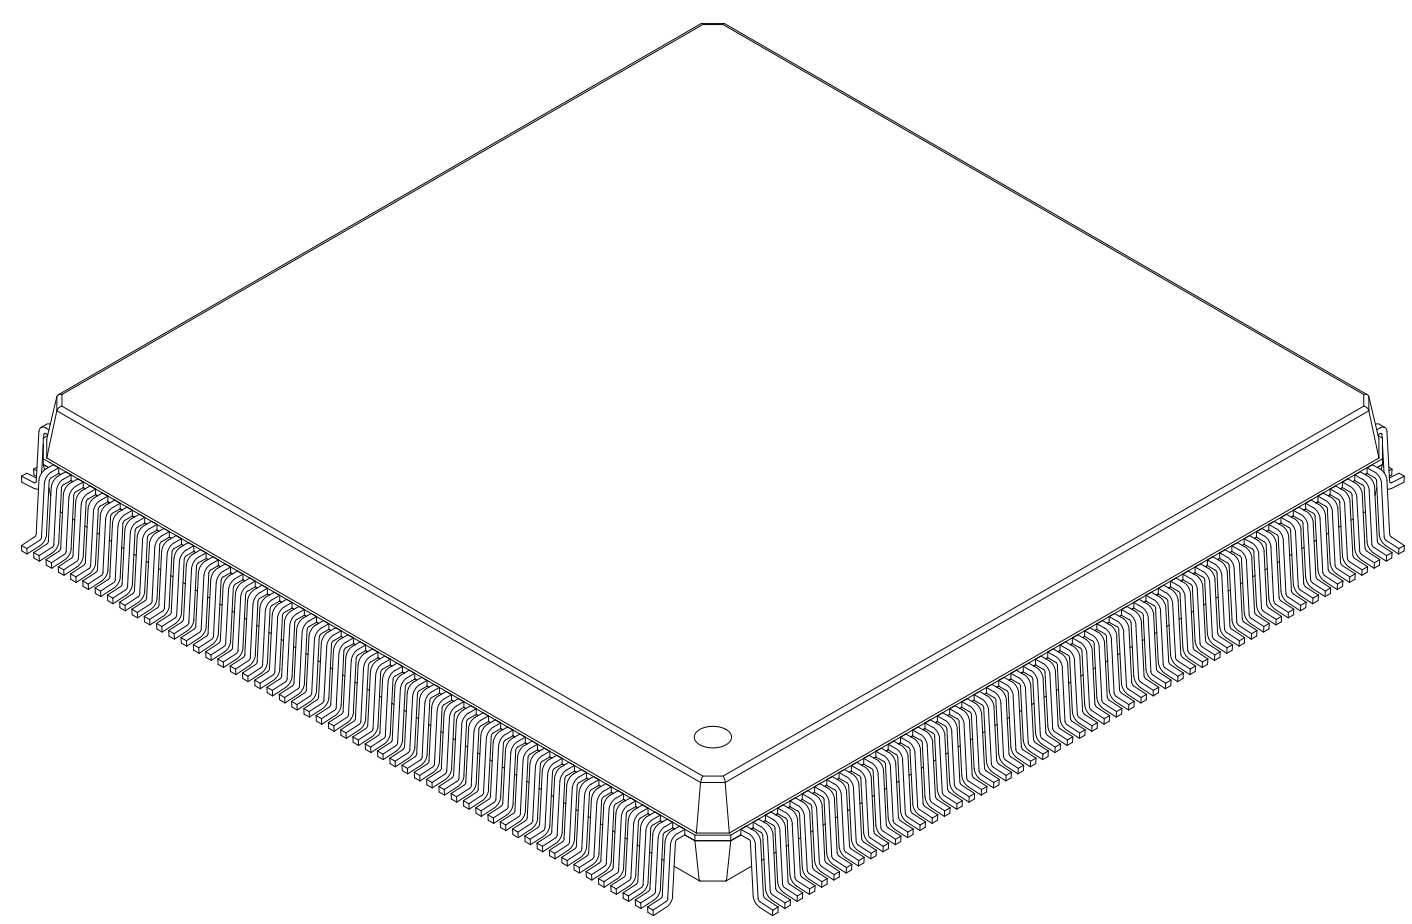

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	208		
Pitch	e	0.50 BSC		
Overall Height	A	–	–	4.10
Standoff	A1	0.25	–	0.50
Molded Package Thickness	A2	3.20	3.32	3.60
Overall Length	D	31.20 BSC		
Molded Package Length	D1	28.00 BSC		
Overall Width	E	31.20 BSC		
Molded Package Width	E1	28.00 BSC		
Terminal Width	b	0.17	0.20	0.27
Terminal Thickness	c	0.11	0.15	0.23
Terminal Length	L	0.73	0.88	1.03
Footprint	L1	1.60 REF		
Lead Bend Radius	R1	0.13	–	–
Lead Bend Radius	R2	0.13	–	0.30
Foot Angle	θ	0°	3.5°	7°
Lead Angle	θ1	0°	–	–
Mold Draft Angle	θ2	8° REF		
Mold Draft Angle	θ3	8° REF		

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.
   REF: Reference Dimension, usually without tolerance, is for information purposes only.

Microchip Technology Drawing C04-21300 Rev A Sheet 2 of 2

Land Pattern

208-Lead Plastic Quad Flat Pack (KXB) - 28x28x3.32 mm Body [PQFP] - 1.6mm Form Opt

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

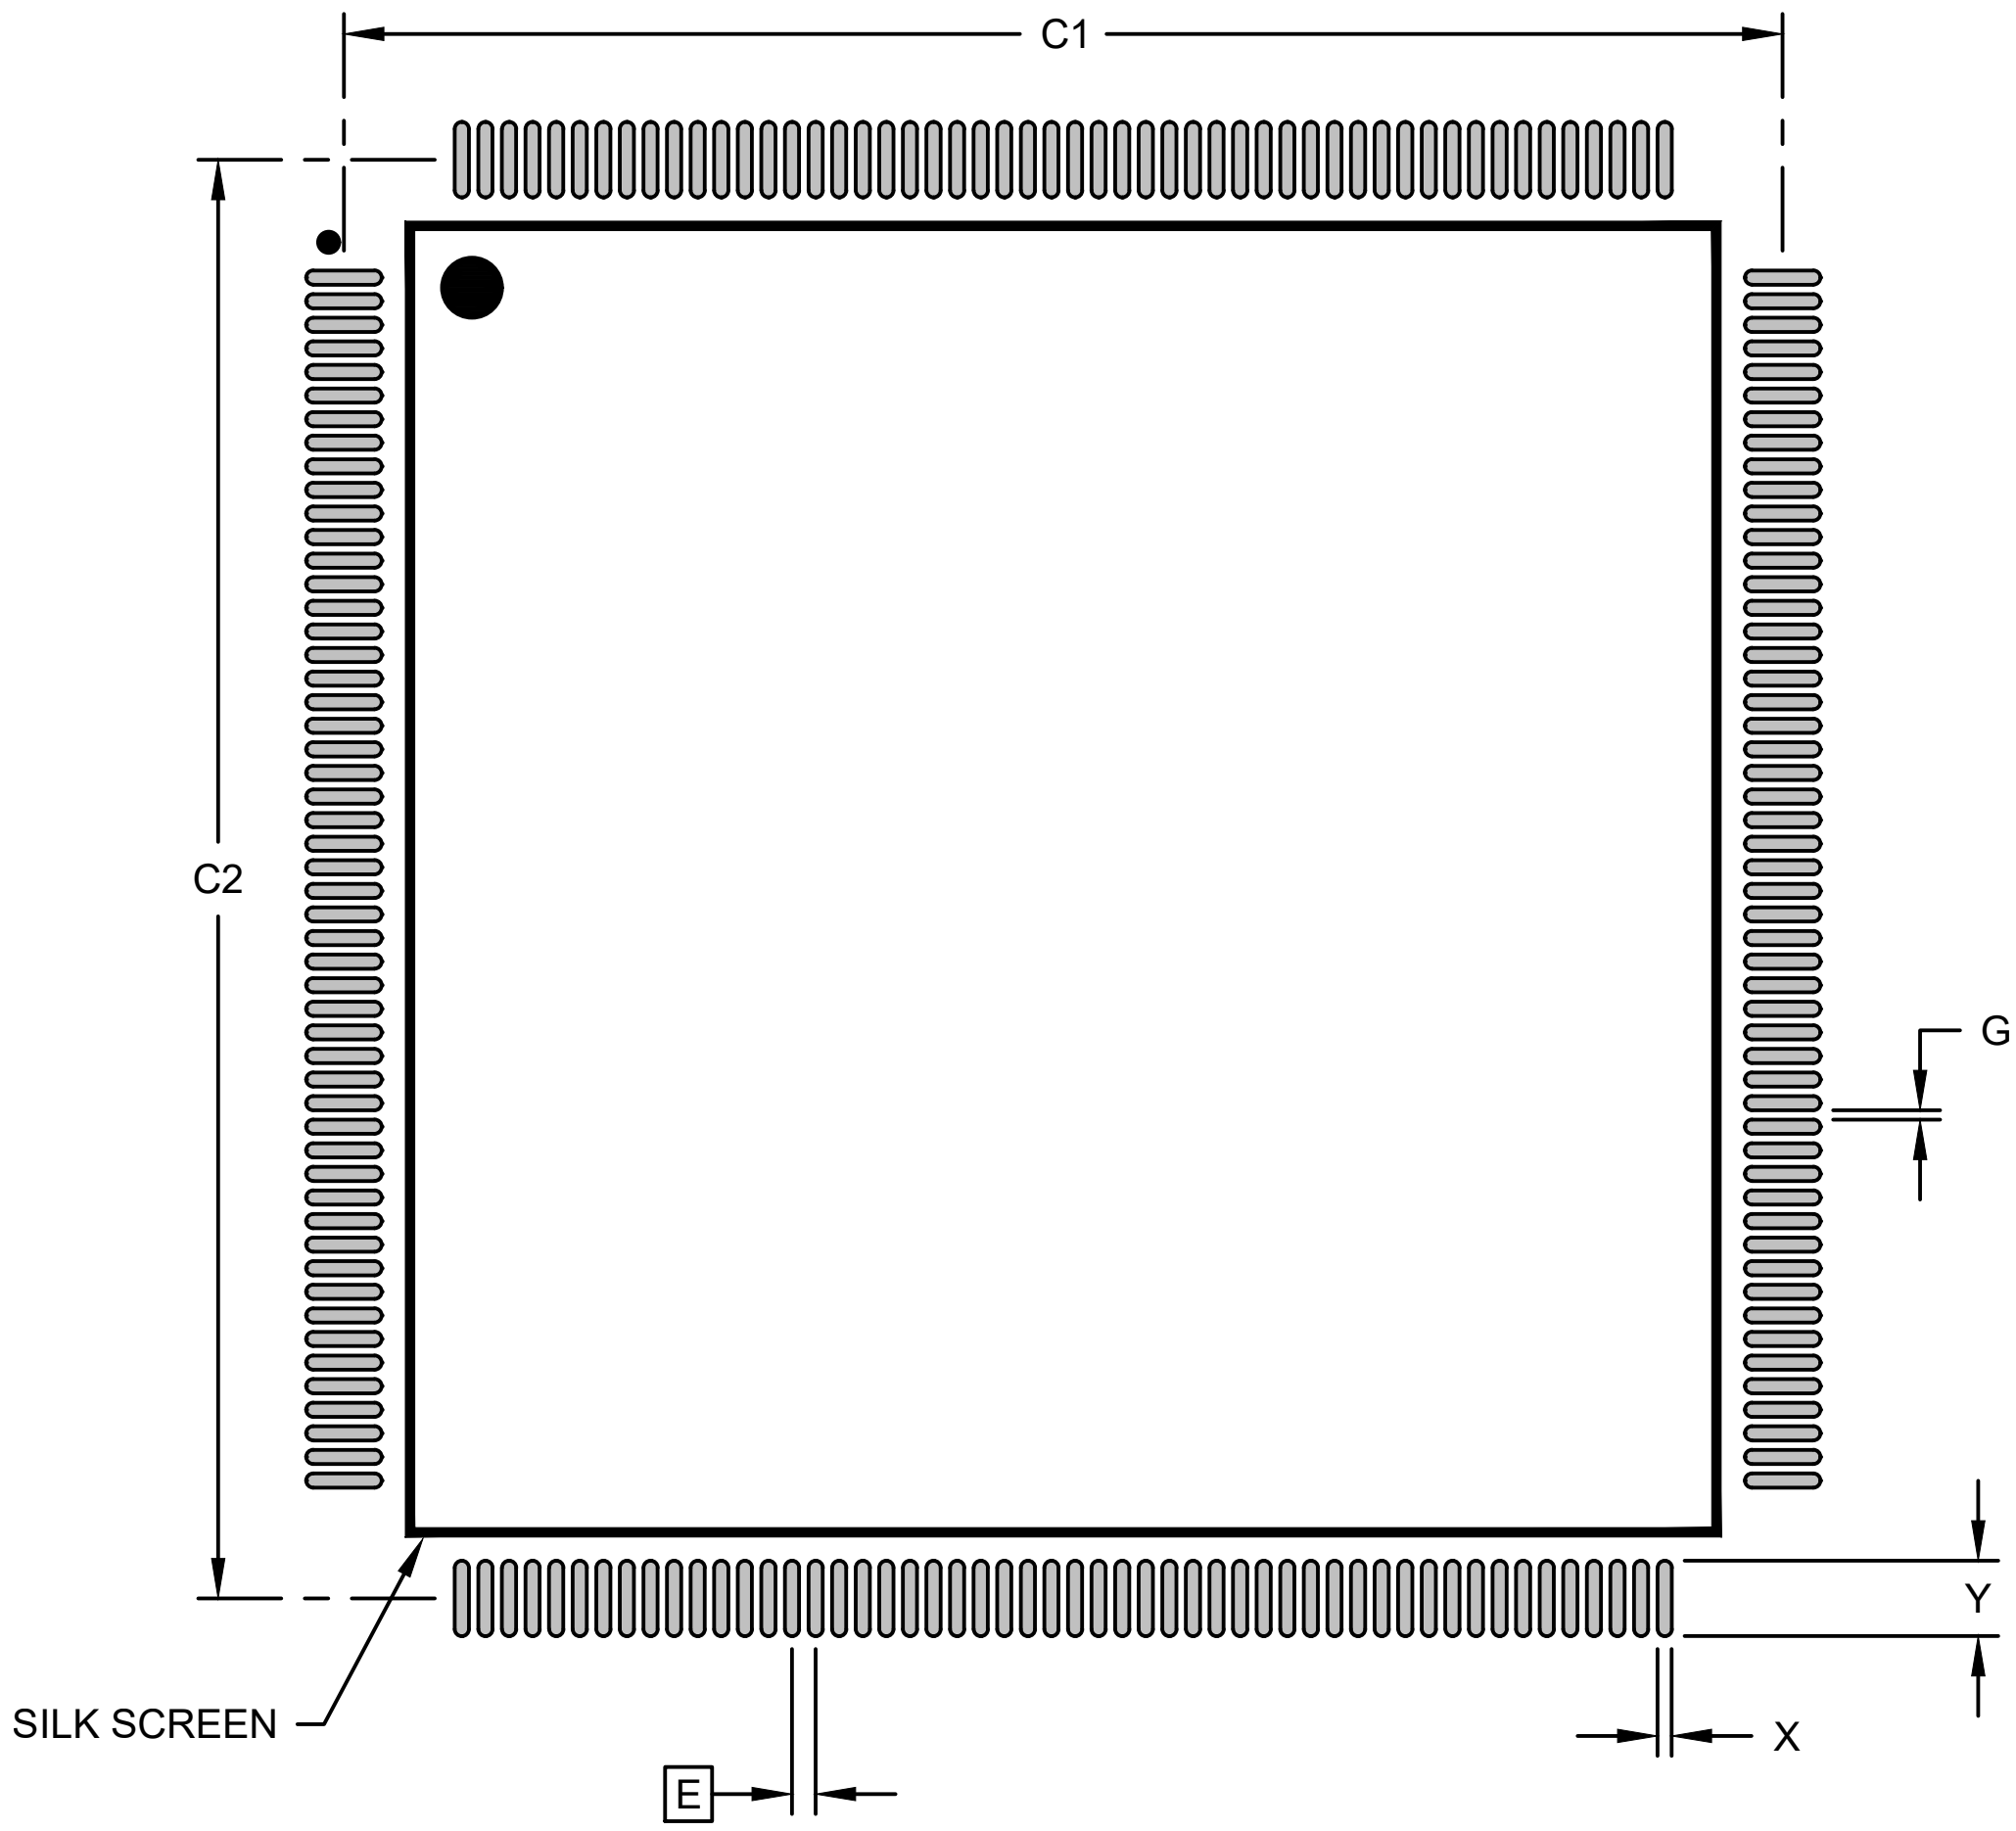

RECOMMENDED LAND PATTERN

		Units	MILLIMETERS	
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		30.50	
Contact Pad Spacing	C2		30.50	
Contact Pad Width (Xnn)	X			0.30
Contact Pad Length (Xnn)	Y			1.60
Contact Pad to Contact Pad (Xnn)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. The theoretically exact value is shown without tolerances.

Microchip Technology Drawing C04-23300 Rev A