## 20-Lead Very Thin Plastic Dual Flat, No Lead Package (JYA) - 4x5 mm Body [VDFN] With 4.3x2.6 mm Exposed Pad

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

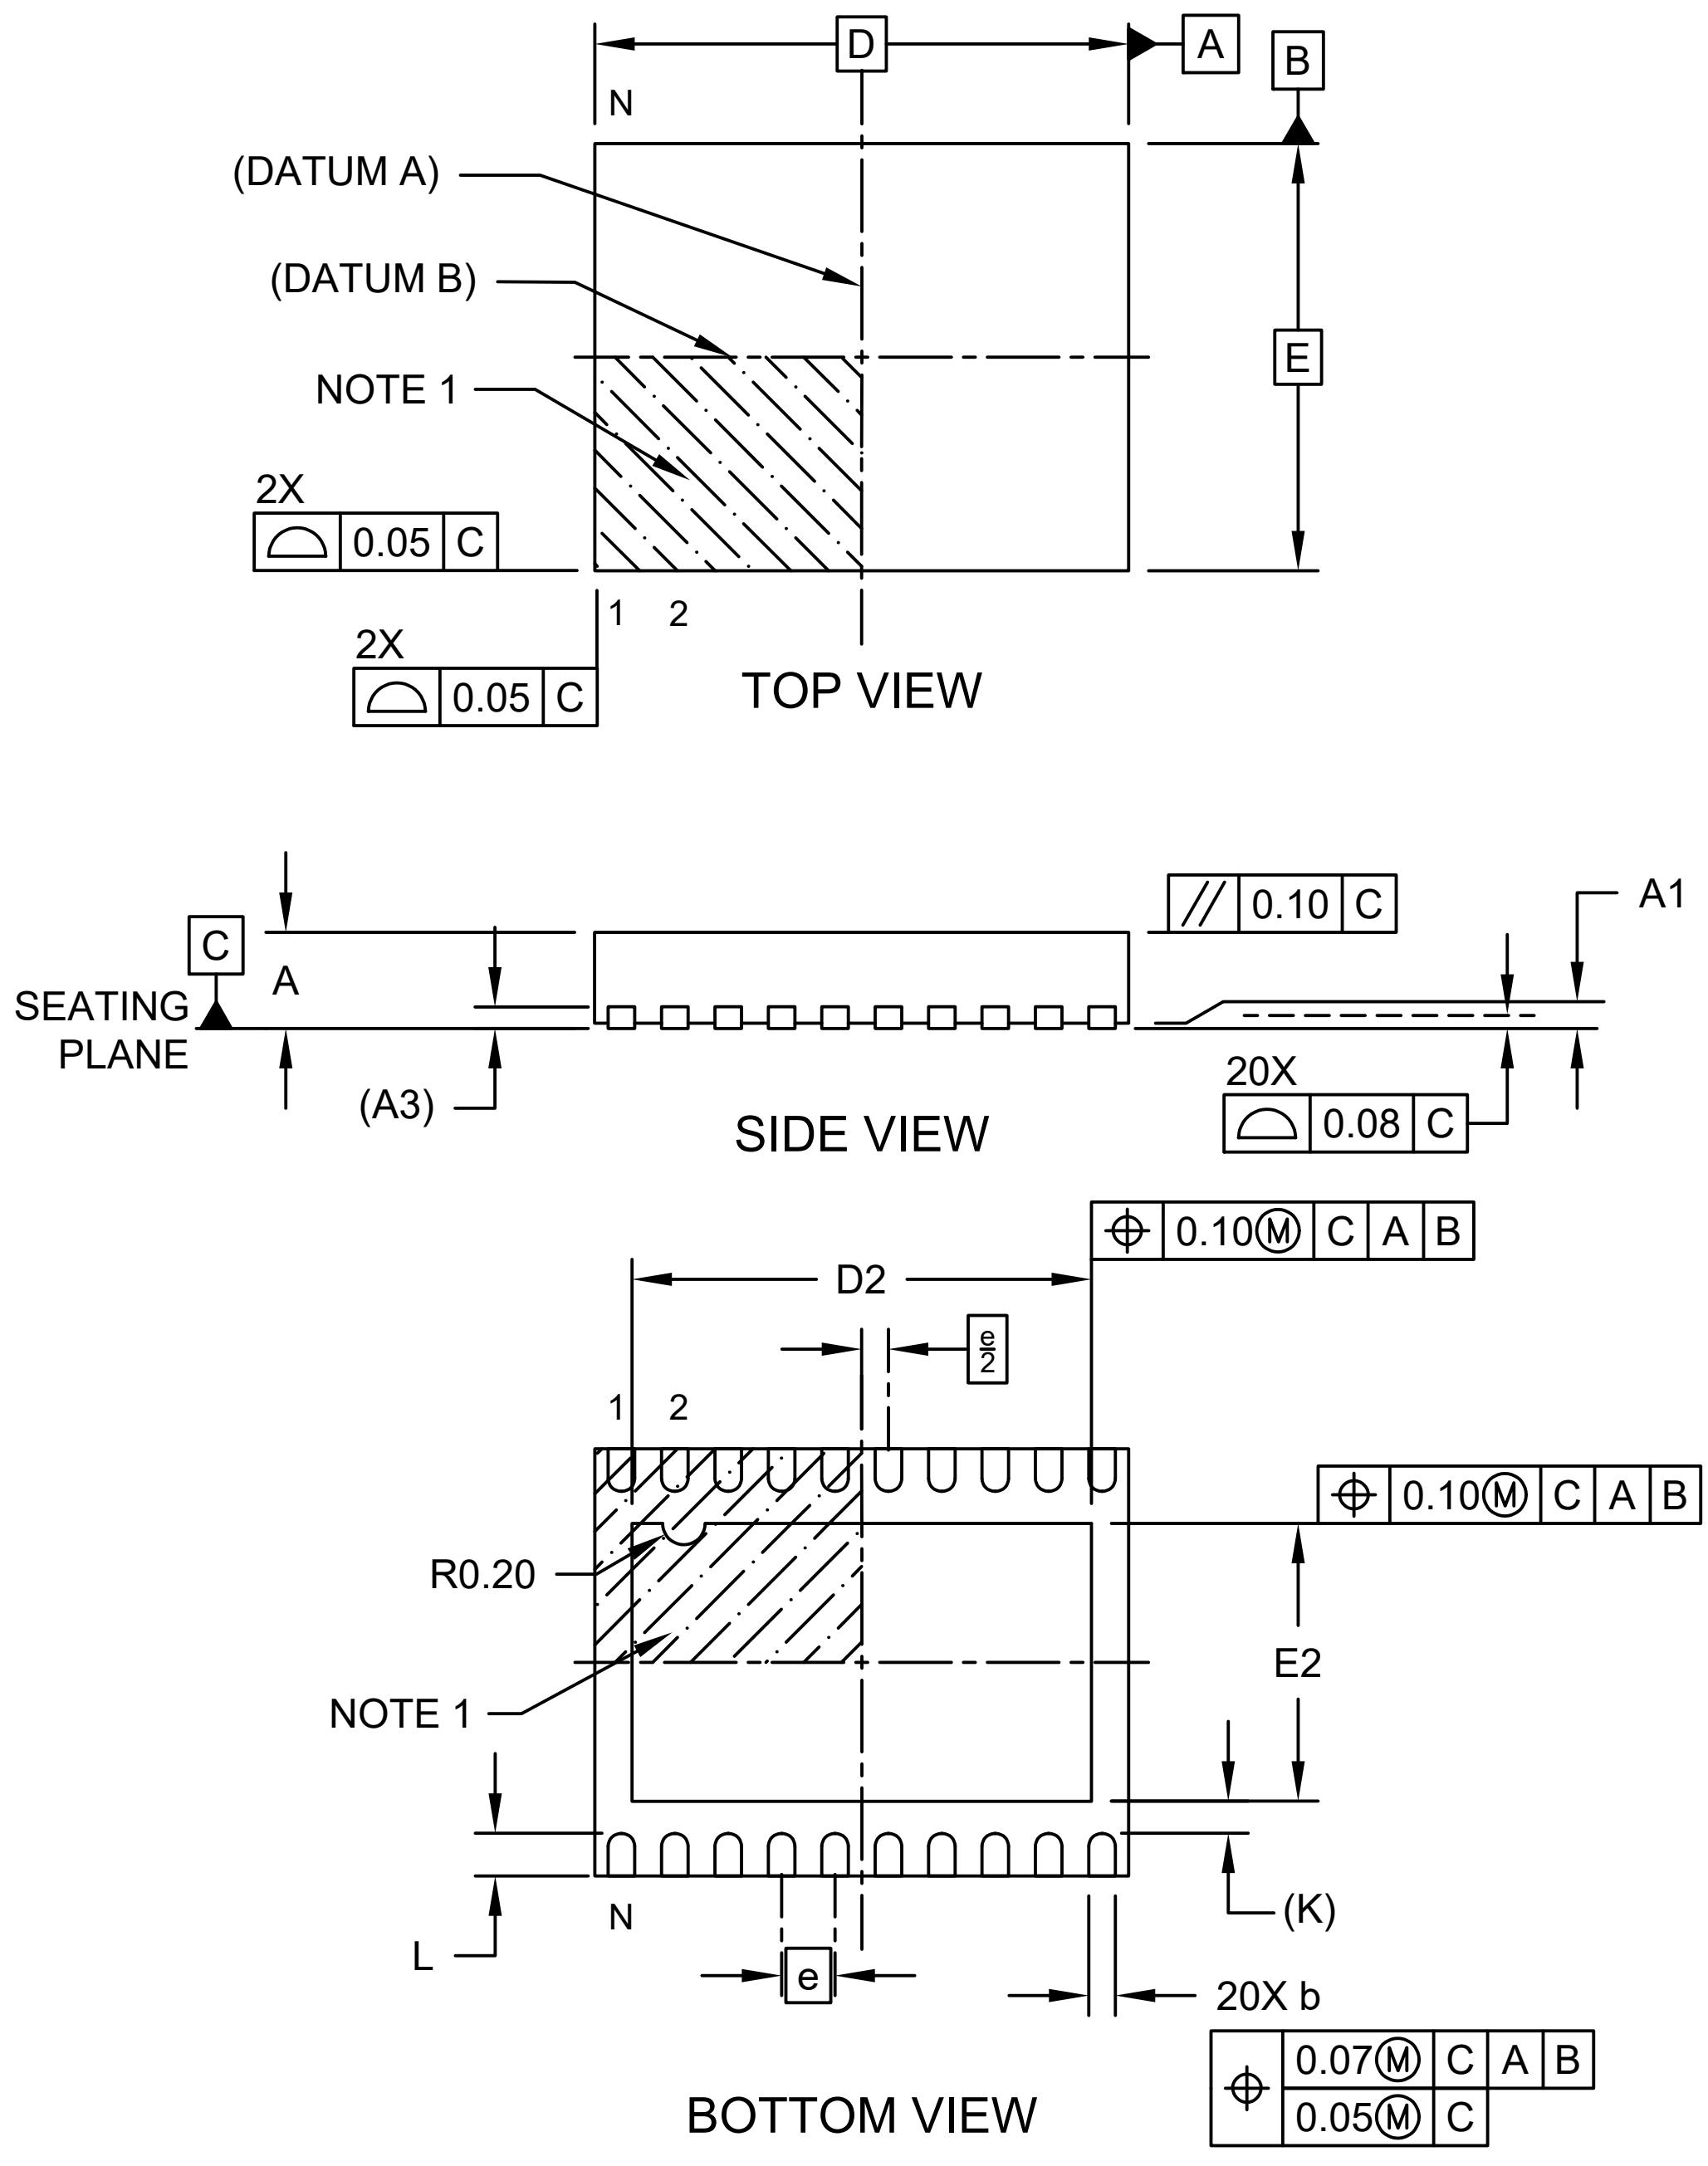


Microchip Technology Drawing C04-1024 Rev A Sheet 1 of 2

## 20-Lead Very Thin Plastic Dual Flat, No Lead Package (JYA) - 4x5 mm Body [VDFN] With 4.3x2.6 mm Exposed Pad

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

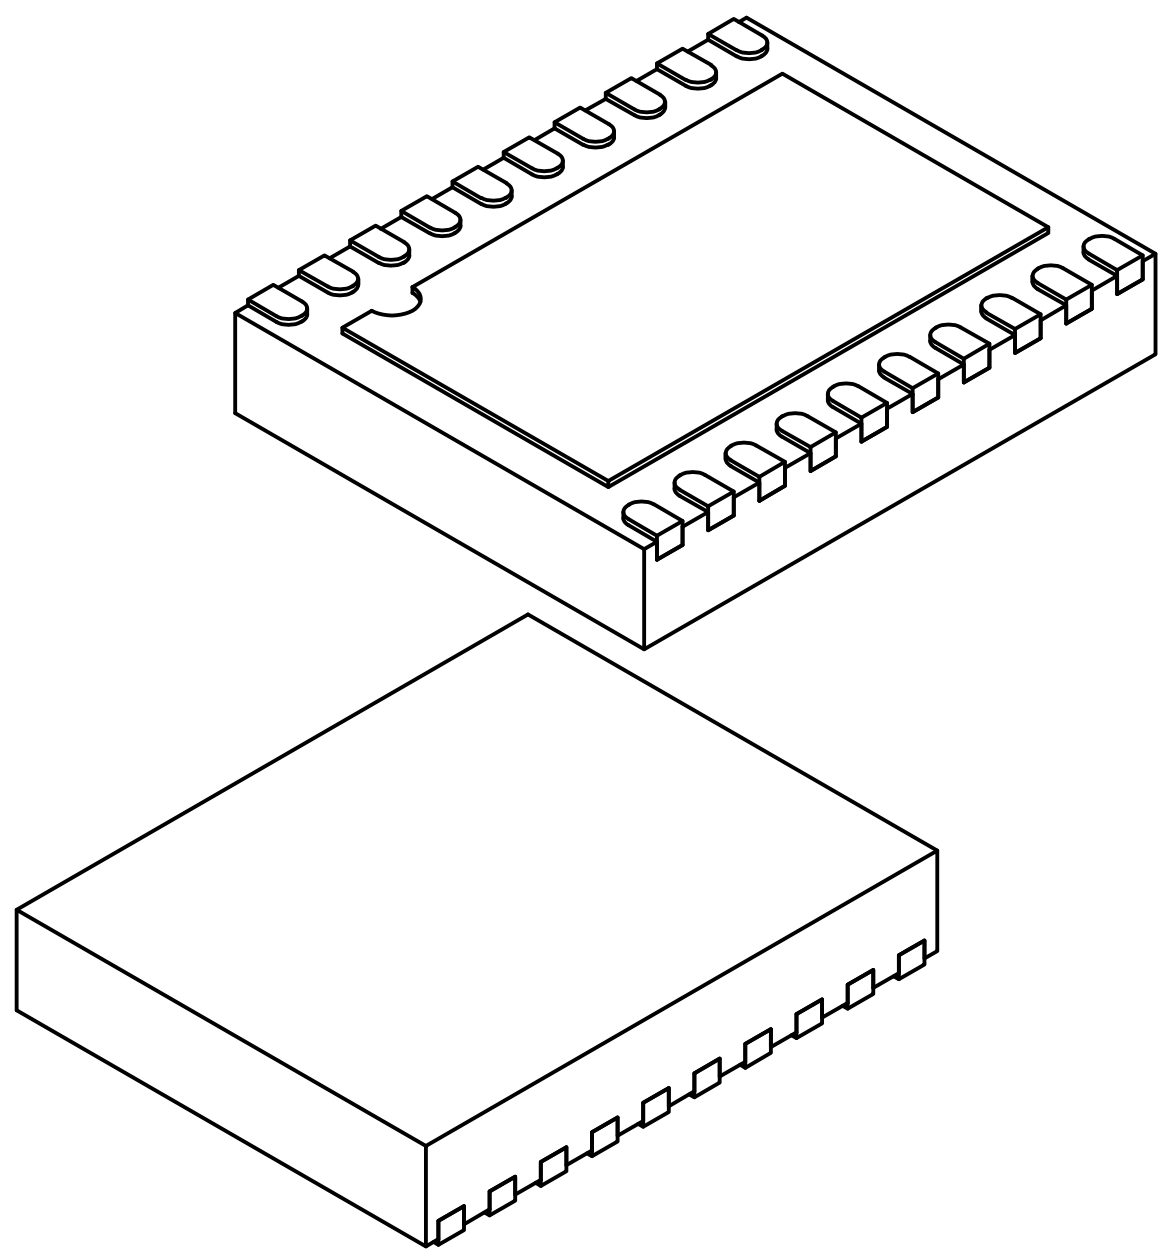

| | Units | MILLIMETERS | | |
|---|---|---|---|---|
| | Dimension Limits | MIN | NOM | MAX |
| Number of Terminals | N | | 20 | |
| Pitch | e | | 0.50 BSC | |
| Overall Height | A | 0.80 | 0.85 | 0.90 |
| Standoff | A1 | 0.00 | .025 | 0.05 |
| Terminal Thickness | A3 | | 0.203 REF | |
| Overall Length | D | | 5.0 BSC | |
| Exposed Pad Length | D2 | 4.25 | 4.30 | 4.35 |
| Overall Width | E | | 4.0 BSC | |
| Exposed Pad Width | E2 | 2.55 | 2.60 | 2.65 |
| Terminal Width | b | 0.20 | 0.25 | 0.30 |
| Terminal Length | L | 0.35 | 0.40 | 0.45 |
| Terminal-to-Exposed-Pad | K | | 0.30 REF | |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1024 Rev A Sheet 2 of 2

## 20-Lead Very Thin Plastic Quad Flat, No Lead Package (JYA) - 4x5 mm Body [VDFN] With 2.6 x 4.3 mm Exposed Pad; Micrel Legacy Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

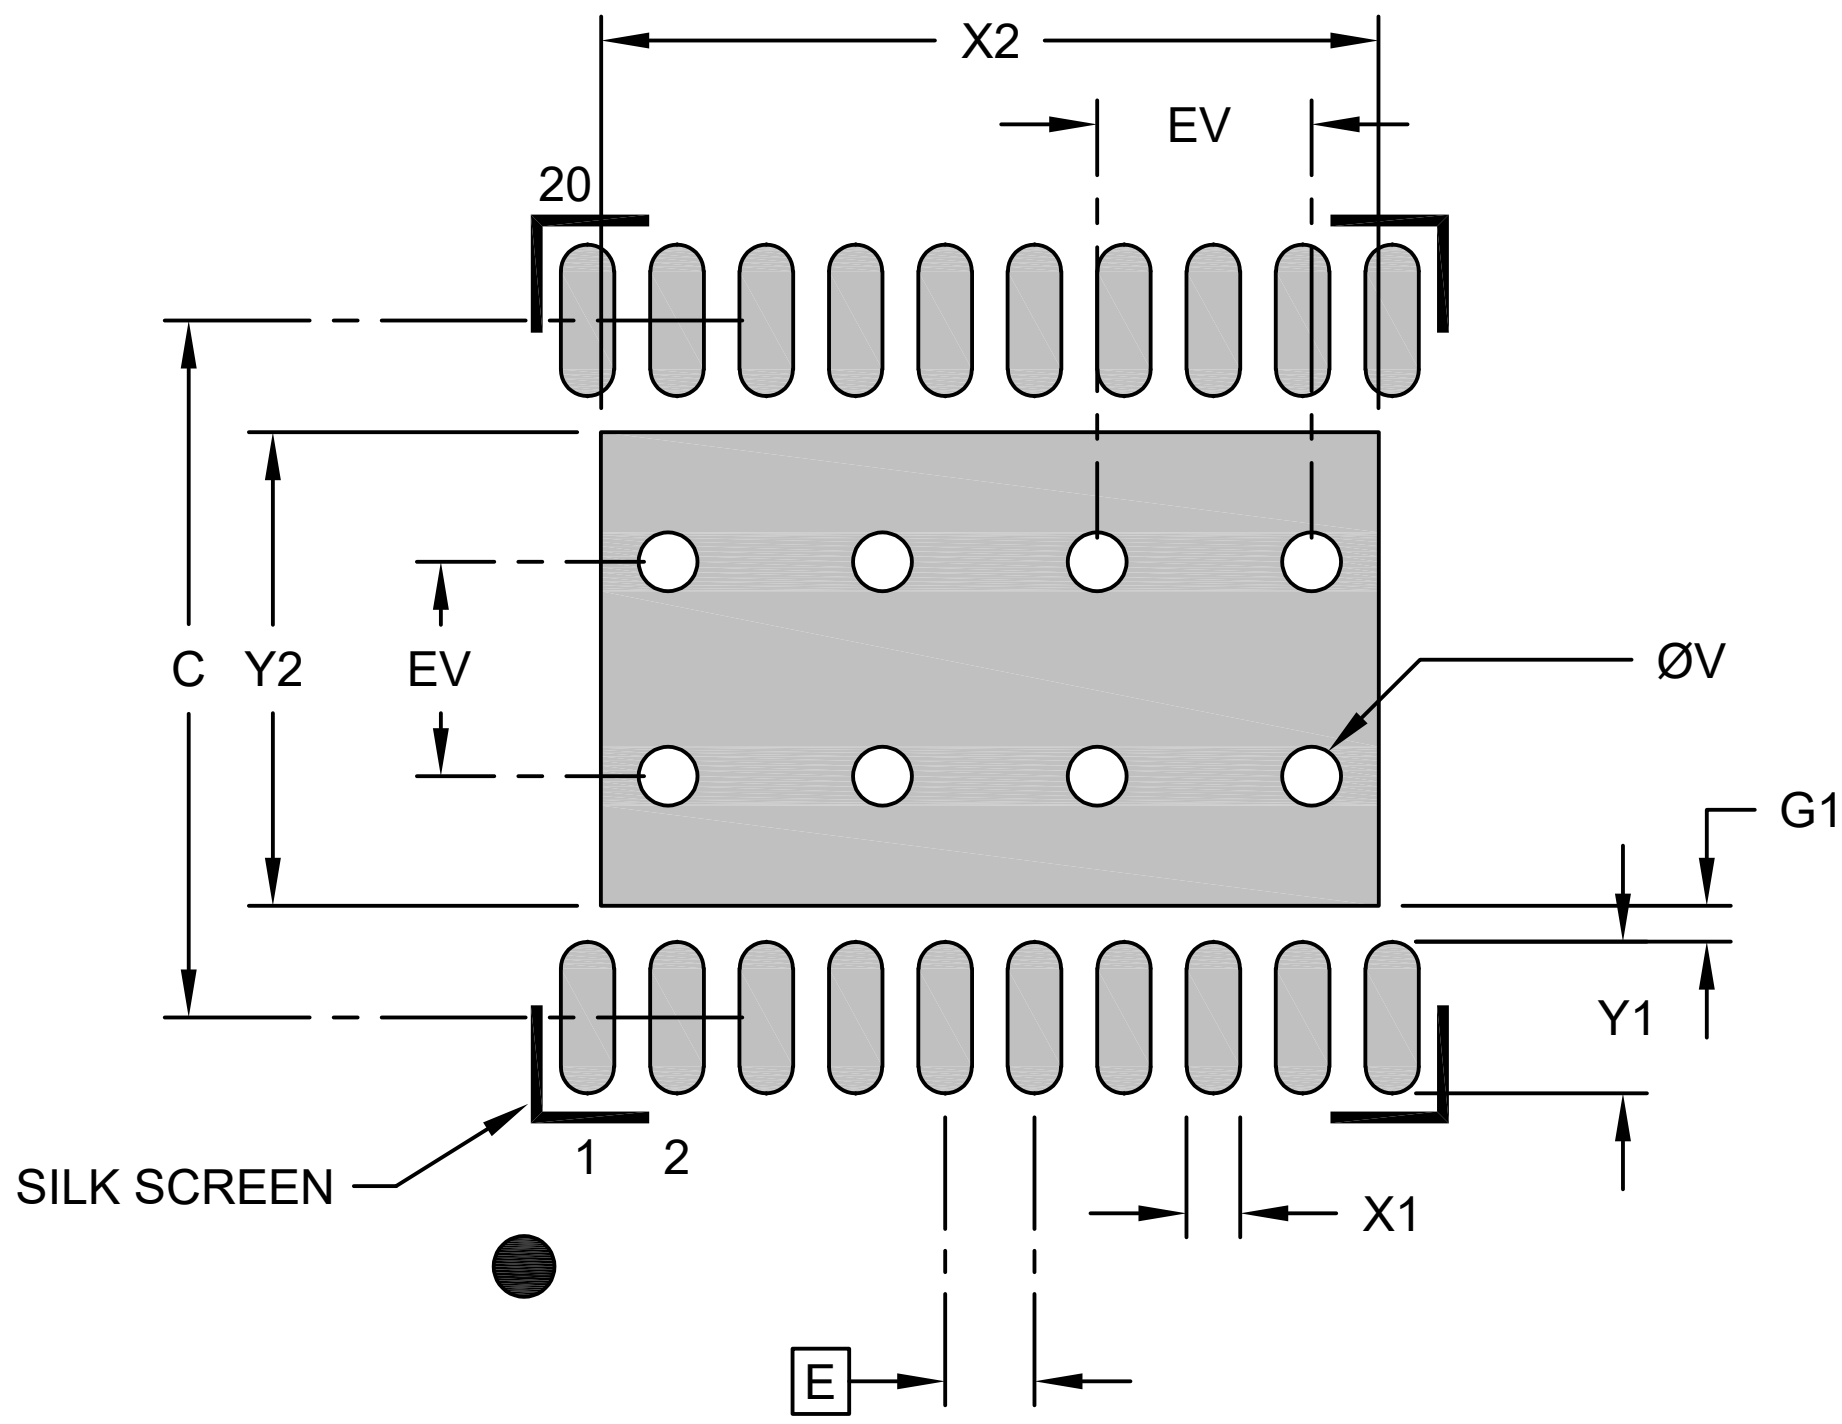


RECOMMENDED LAND PATTERN

| | Units | MILLIMETERS | | |
|---|---|---|---|---|
| | Dimension Limits | MIN | NOM | MAX |
| Contact Pitch | E | 0.50 BSC | | |
| Optional Center Pad Width | X2 | | | 4.35 |
| Optional Center Pad Length | Y2 | | | 2.65 |
| Contact Pad Spacing | C | | 3.90 | |
| Contact Pad Width (X20) | X1 | | | 0.30 |
| Contact Pad Length (X20) | Y1 | | | 0.85 |
| Contact Pad to Center Pad (X20) | G1 | 0.20 | | |
| Thermal Via Diameter | V | | 0.33 | |
| Thermal Via Pitch | EV | | 1.20 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3024 Rev. A