64-Lead Very Thin Grid Array Quad Flat Pack No-Lead (M8) - 9x9x0.927 mm Body [VGQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

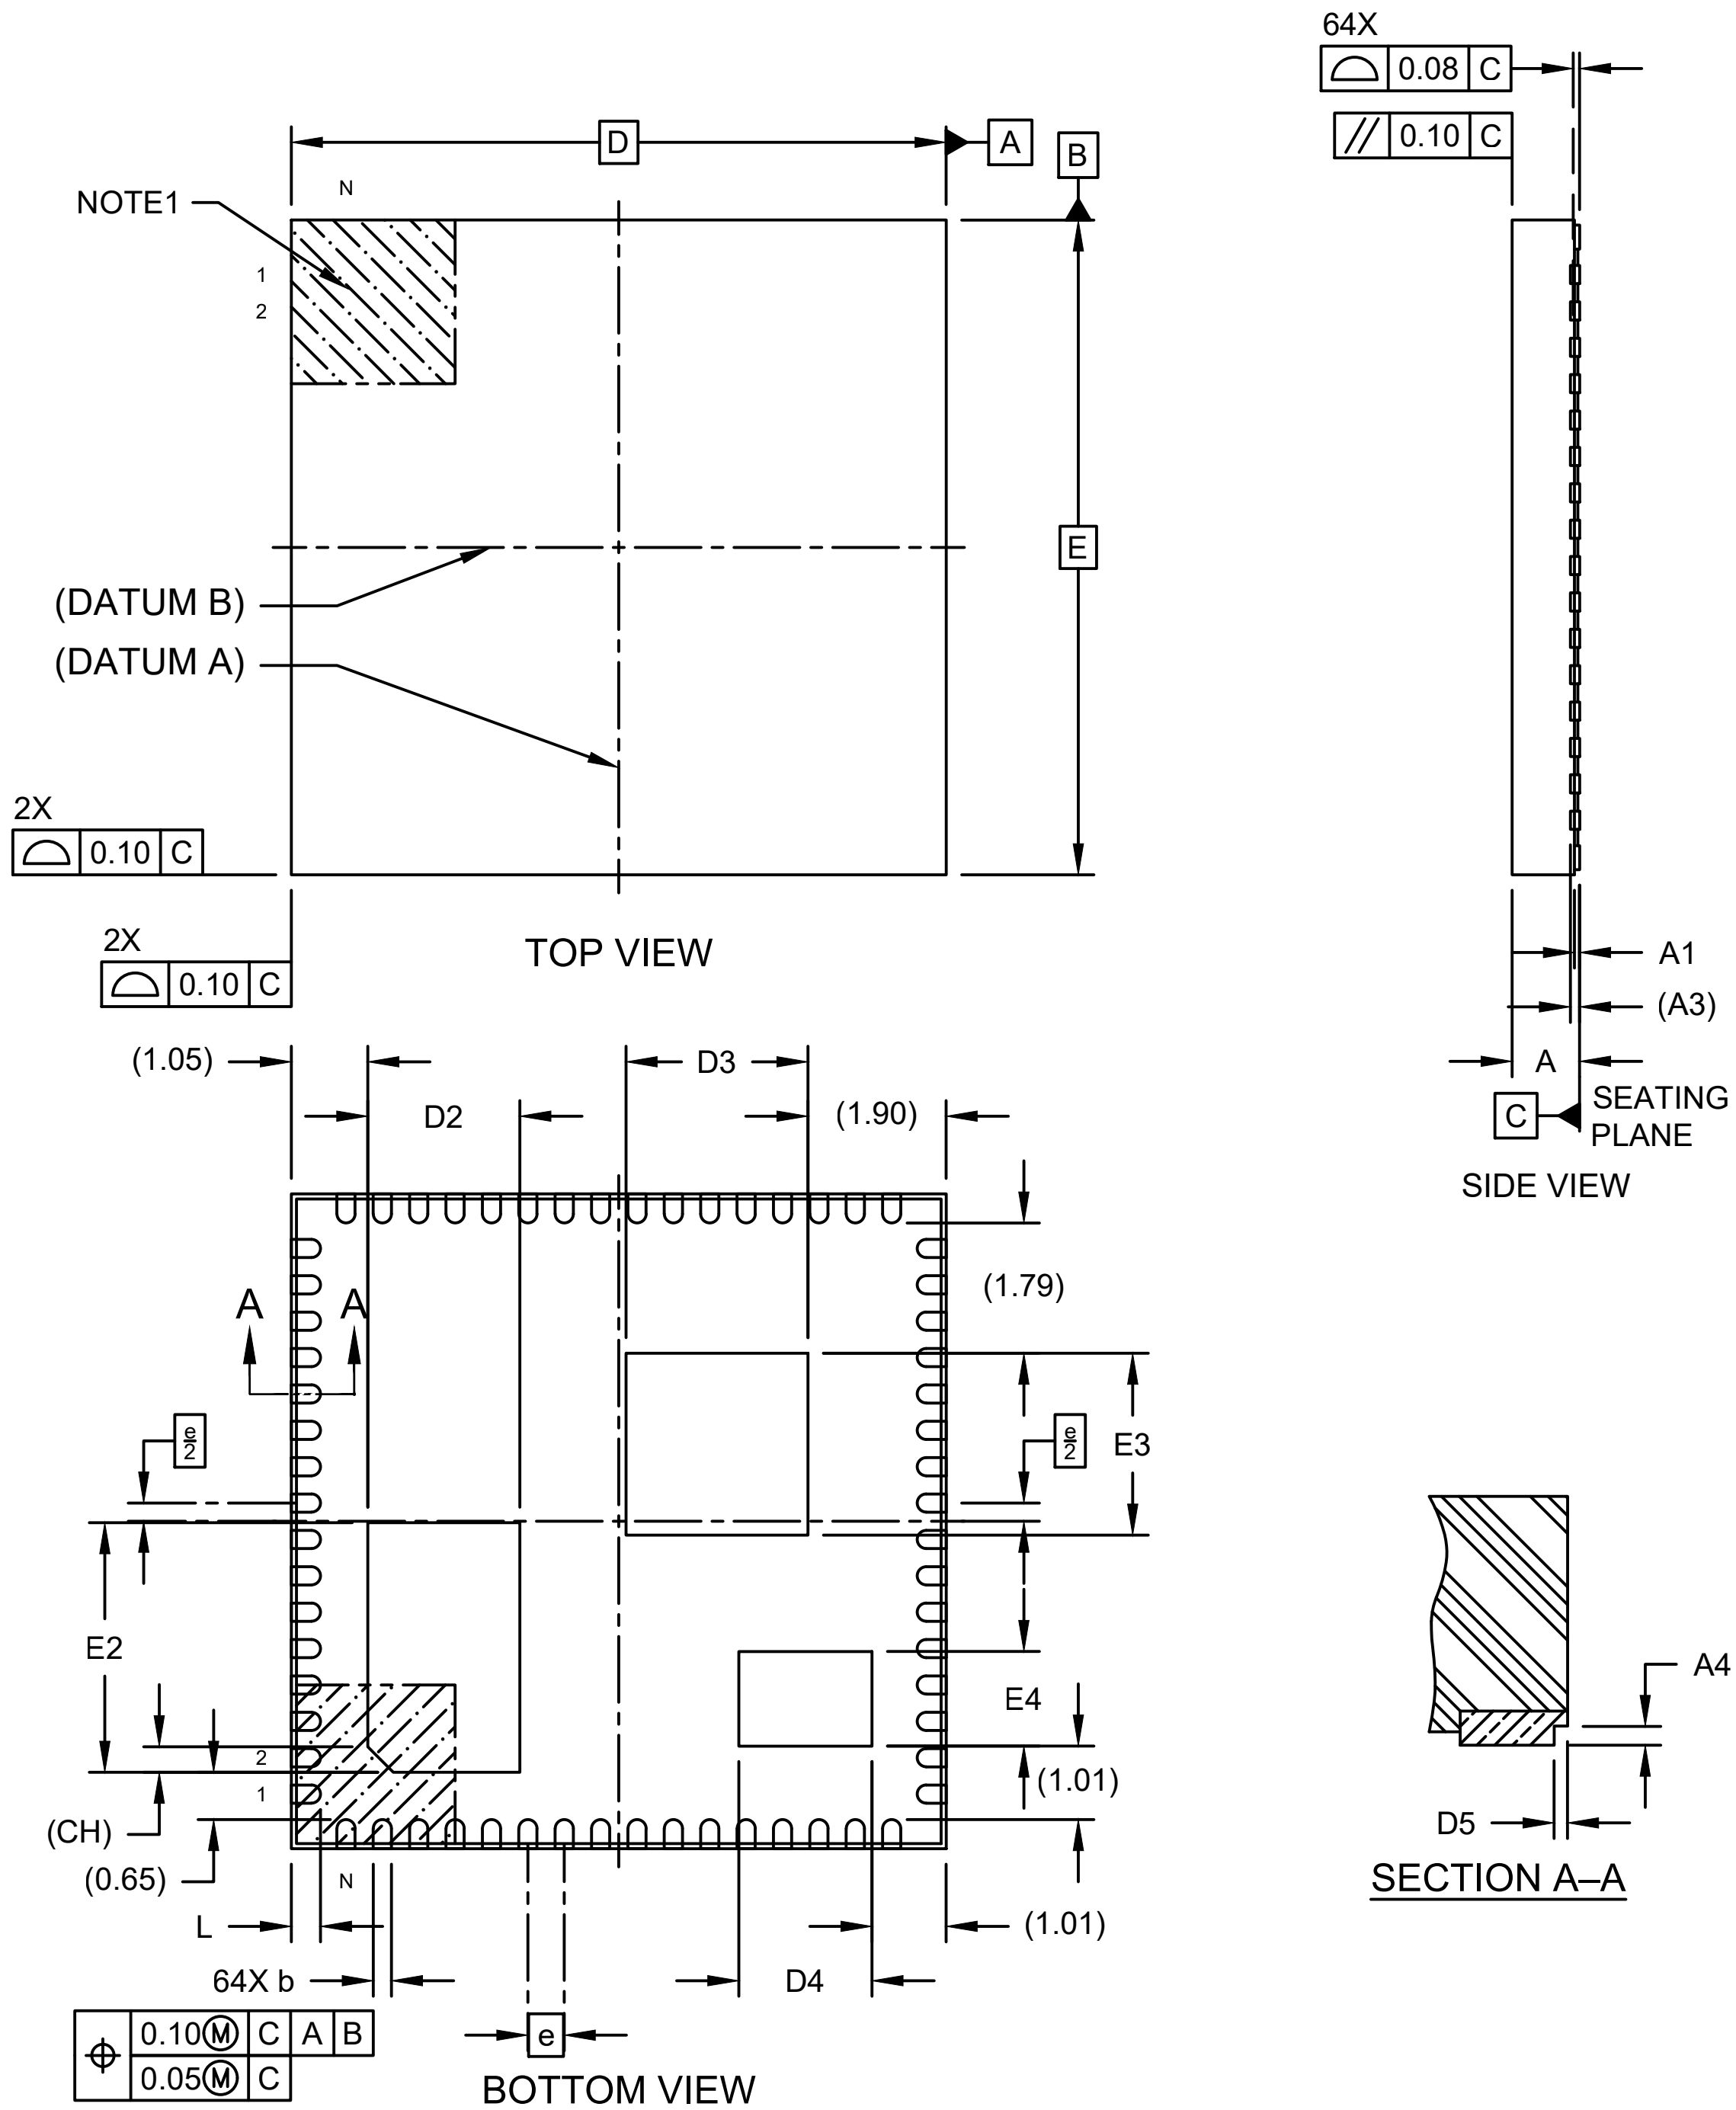

Microchip Technology Drawing C04-00530-M8 Rev D Sheet 1 of 2

64-Lead Very Thin Grid Array Quad Flat Pack No-Lead (M8) - 9x9x0.927 mm Body [VGQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

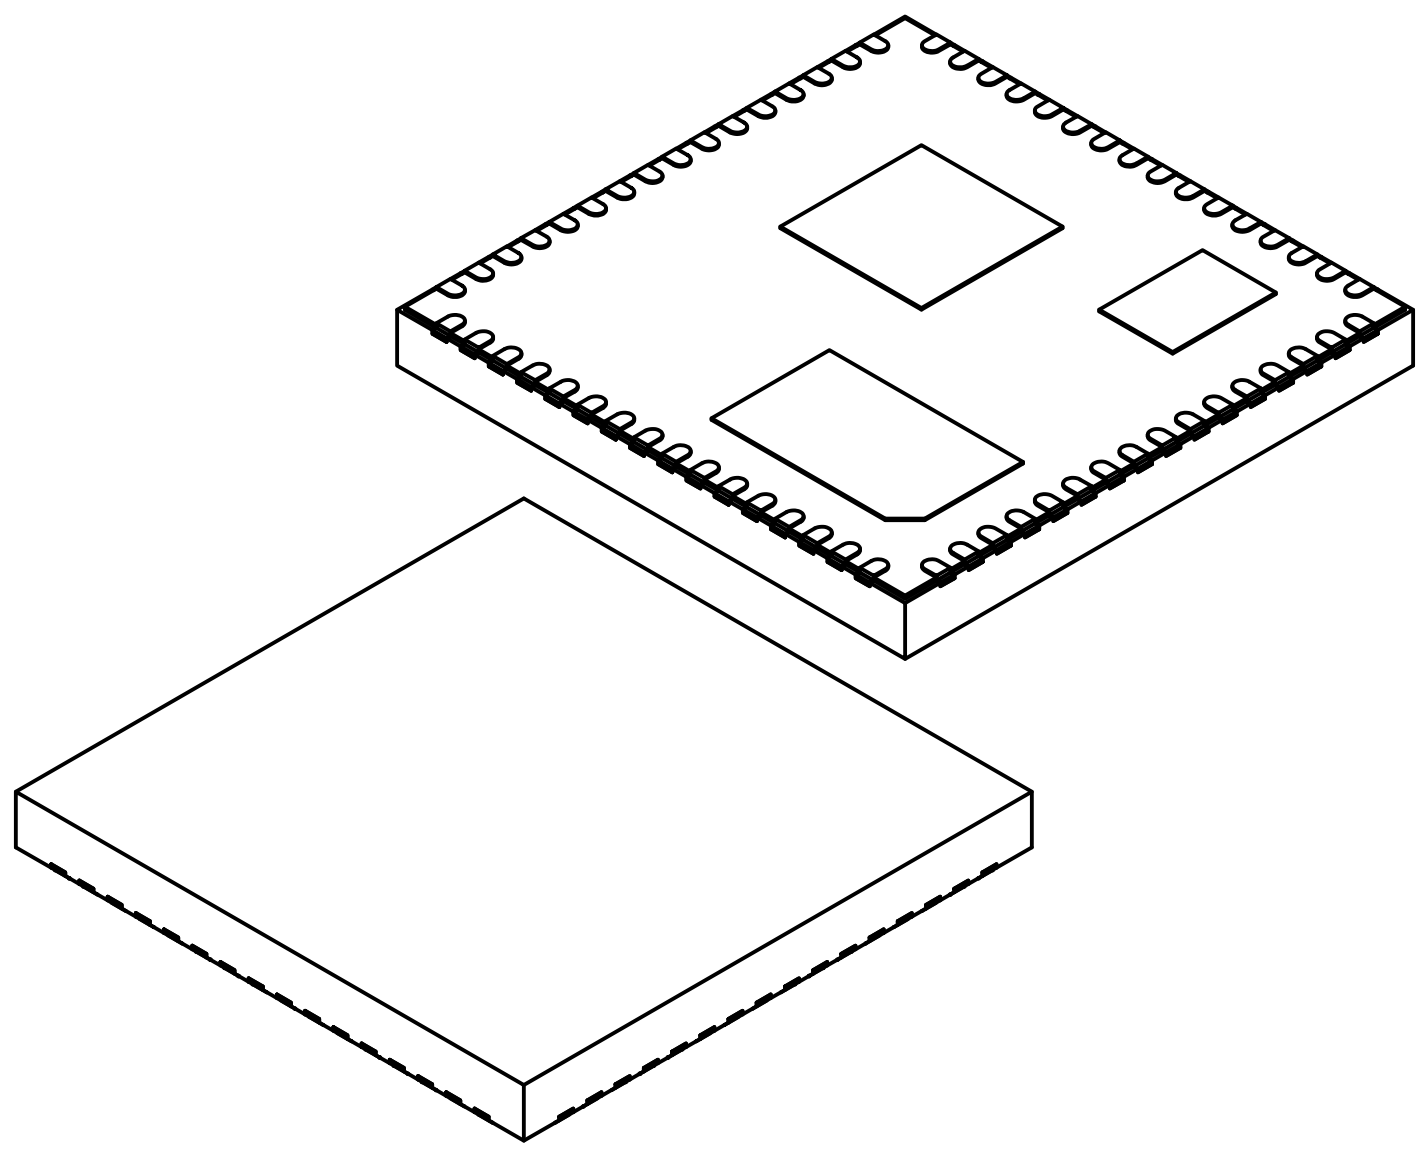

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N		64	
Pitch	e		0.50 BSC	
Overall Height	A	0.827	0.877	0.927
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.127 REF	
Overall Length	D		9.00 BSC	
Exposed Pad Length	D2	1.99	2.09	2.19
Exposed Pad Length	D3	2.40	2.50	2.60
Exposed Pad Length	D4	1.73	1.83	1.93
Overall Width	E		9.00 BSC	
Exposed Pad Width	E2	3.33	3.43	3.53
Exposed Pad Width	E3	2.40	2.50	2.60
Exposed Pad Width	E4	1.20	1.30	1.40
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Exposed Pad Corner Chamfer	CH		0.35 REF	
Wettable Flank Step Cut Length	D5	0.01	0.05	0.09
Wettable Flank Step Cut Height	A4	0.03	-	-

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00530-M8 Rev D Sheet 2 of 2

Land Pattern

64-Lead Very Thin Grid Array Quad Flat Pack No-Lead (M8) - 9x9x0.927 mm Body [VGQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

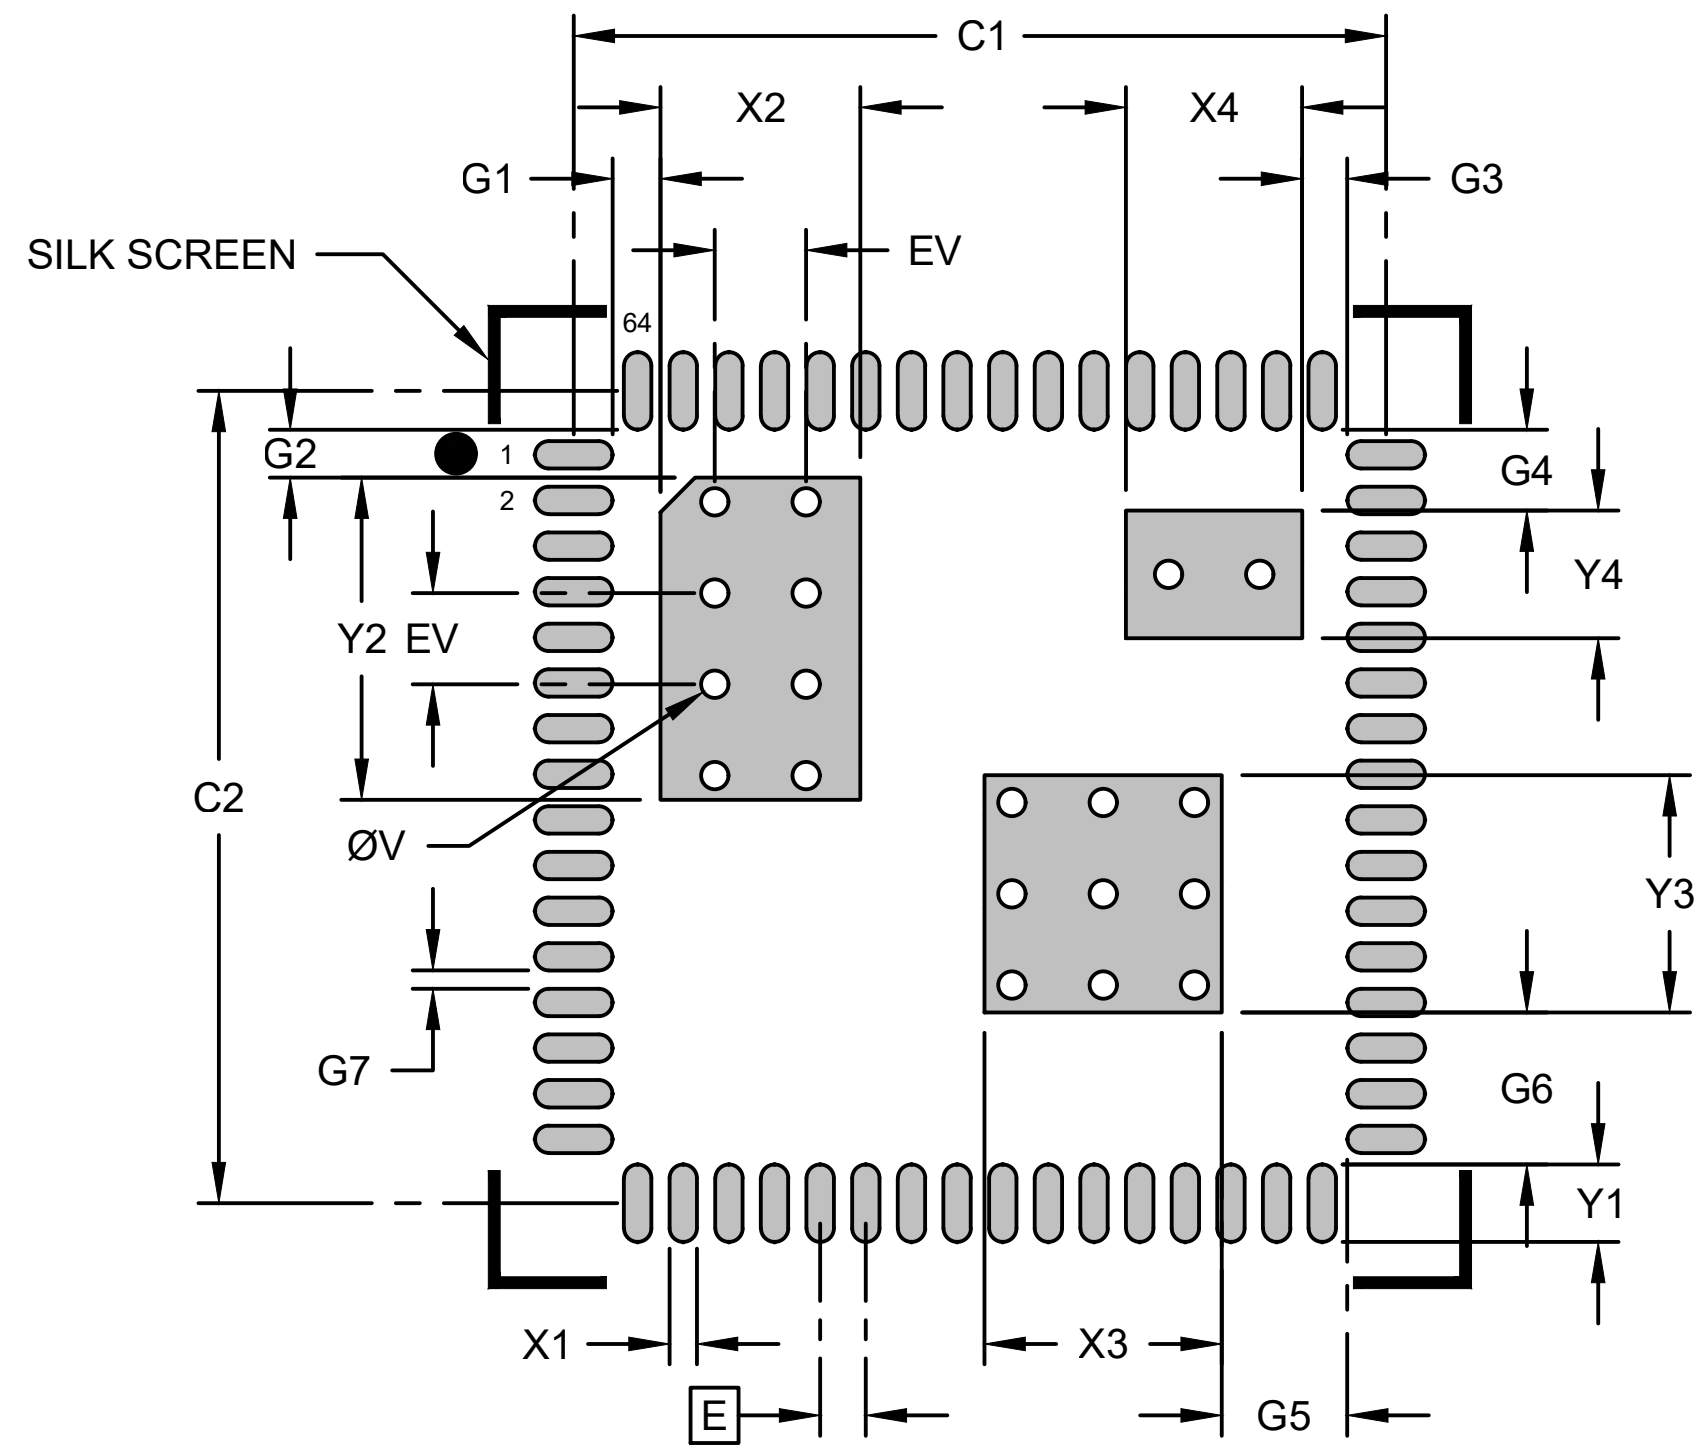

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Center Pad Width	X2			2.19
Center Pad Length	Y2			3.53
Center Pad Width	X3			2.60
Center Pad Length	Y3			2.60
Center Pad Width	X4			1.93
Center Pad Length	Y4			1.40
Contact Pad Spacing	C1		8.90	
Contact Pad Spacing	C2		8.90	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.85
Contact Pad to Center Pad	G1	0.53		
Contact Pad to Center Pad	G2	0.53		
Contact Pad to Center Pad	G3	0.50		
Contact Pad to Center Pad	G4	0.86		
Contact Pad to Center Pad	G5	1.38		
Contact Pad to Center Pad	G6	1.67		
Contact Pad to Contact Pad	G7	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-02530-M8 Rev D

64-Lead Very Thin Grid Array Quad Flat Pack No-Lead (PSX) - 9x9x0.927 mm Body [VGQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

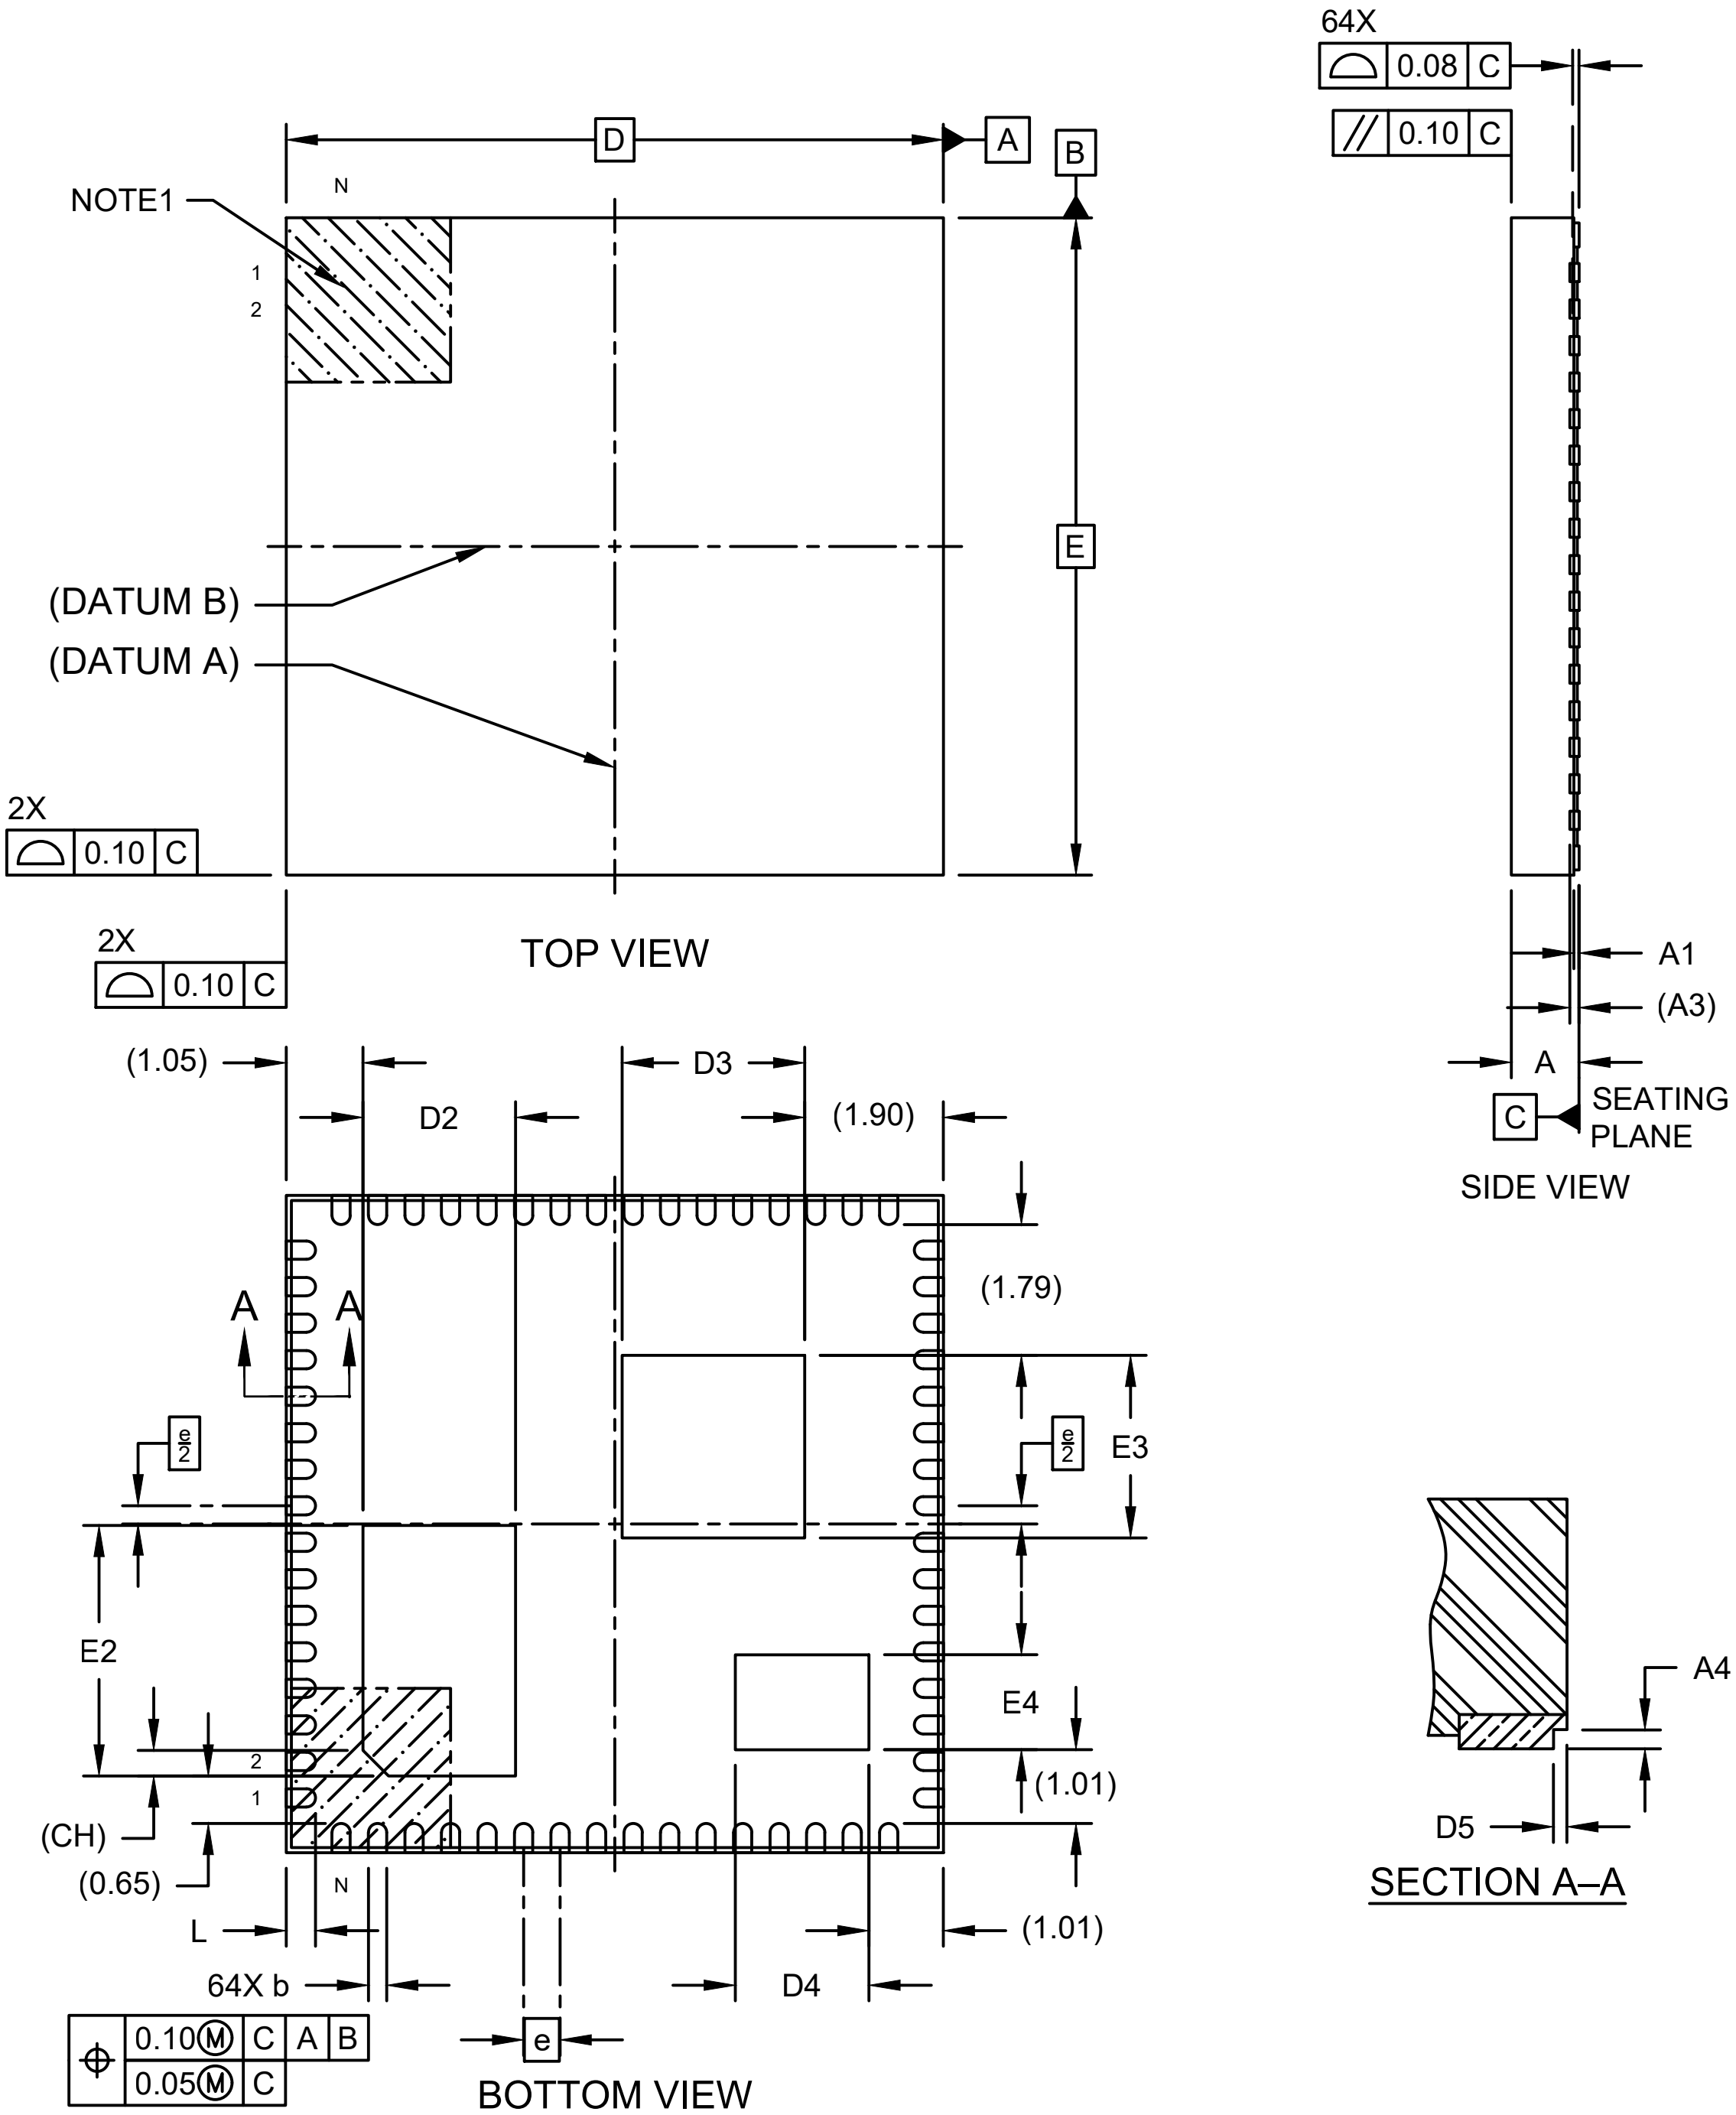

Microchip Technology Drawing C04-00530-PSX Rev D Sheet 1 of 2

64-Lead Very Thin Grid Array Quad Flat Pack No-Lead (PSX) - 9x9x0.927 mm Body [VGQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

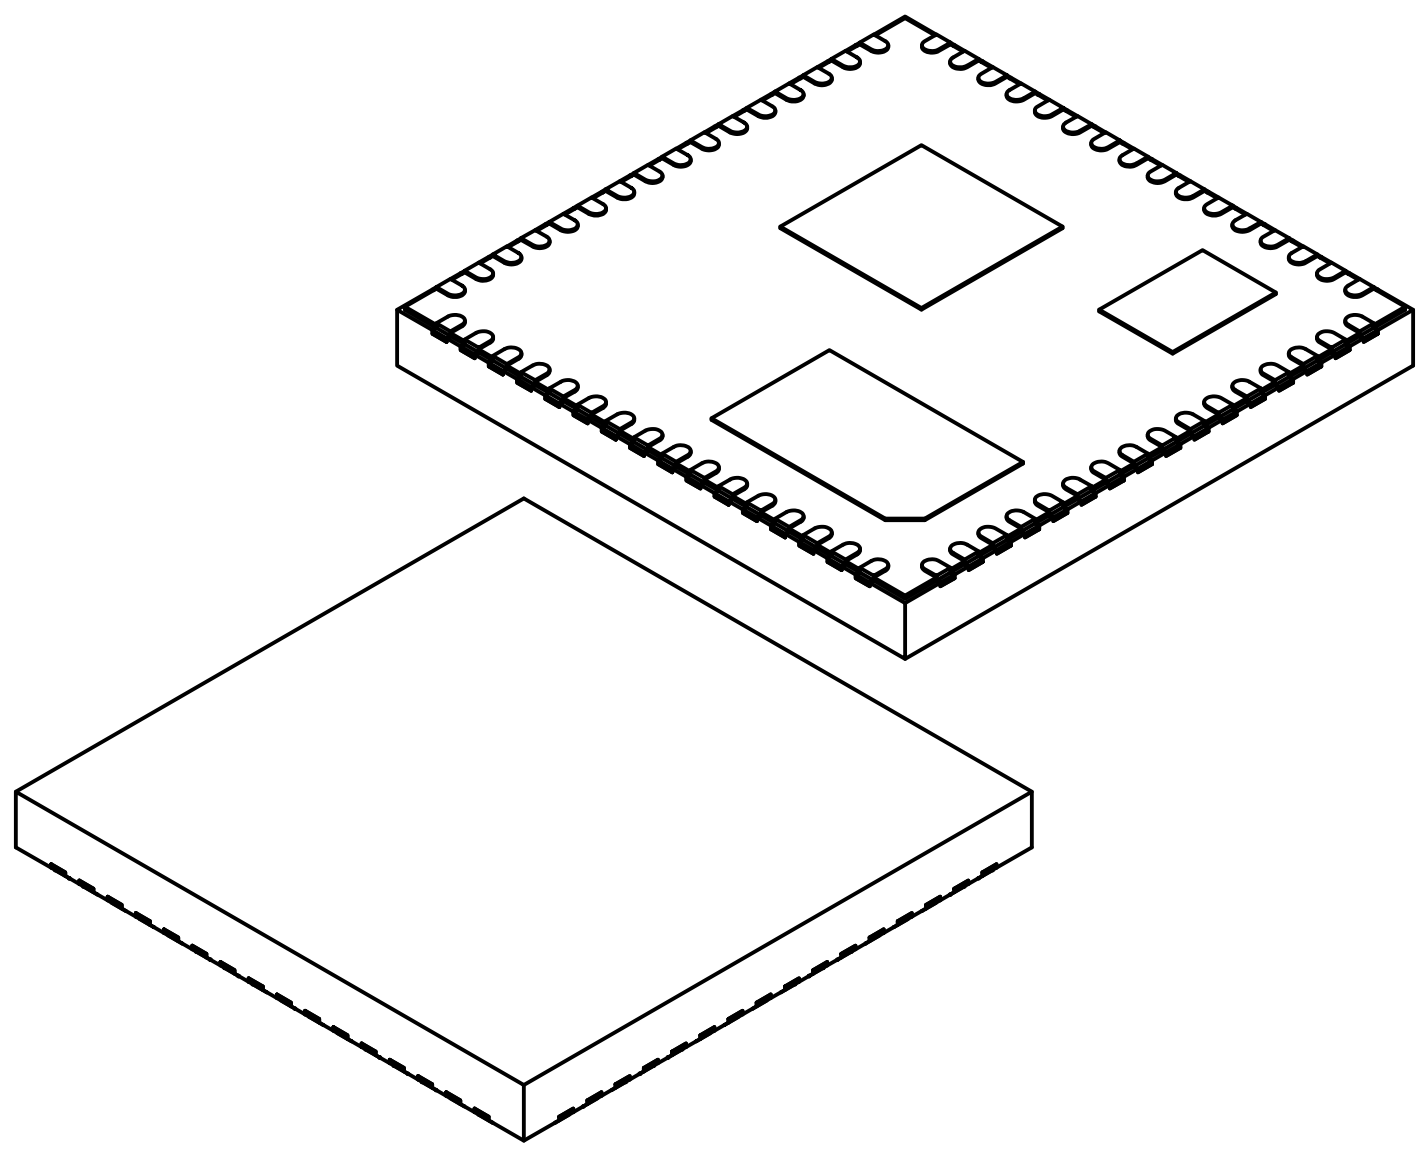

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		64	
Pitch	e		0.50 BSC	
Overall Height	A	0.827	0.877	0.927
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.127 REF	
Overall Length	D		9.00 BSC	
Exposed Pad Length	D2	1.99	2.09	2.19
Exposed Pad Length	D3	2.40	2.50	2.60
Exposed Pad Length	D4	1.73	1.83	1.93
Overall Width	E		9.00 BSC	
Exposed Pad Width	E2	3.33	3.43	3.53
Exposed Pad Width	E3	2.40	2.50	2.60
Exposed Pad Width	E4	1.20	1.30	1.40
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.30	0.40	0.50
Exposed Pad Corner Chamfer	CH		0.35 REF	
Wettable Flank Step Cut Length	D5	0.01	0.05	0.09
Wettable Flank Step Cut Height	A4	0.03	-	-

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00530-PSX Rev D Sheet 2 of 2

Land Pattern

64-Lead Very Thin Grid Array Quad Flat Pack No-Lead (PSX) - 9x9x0.927 mm Body [VGQFN] With Multiple Exposed Pads and Stepped Wettable Flanks

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

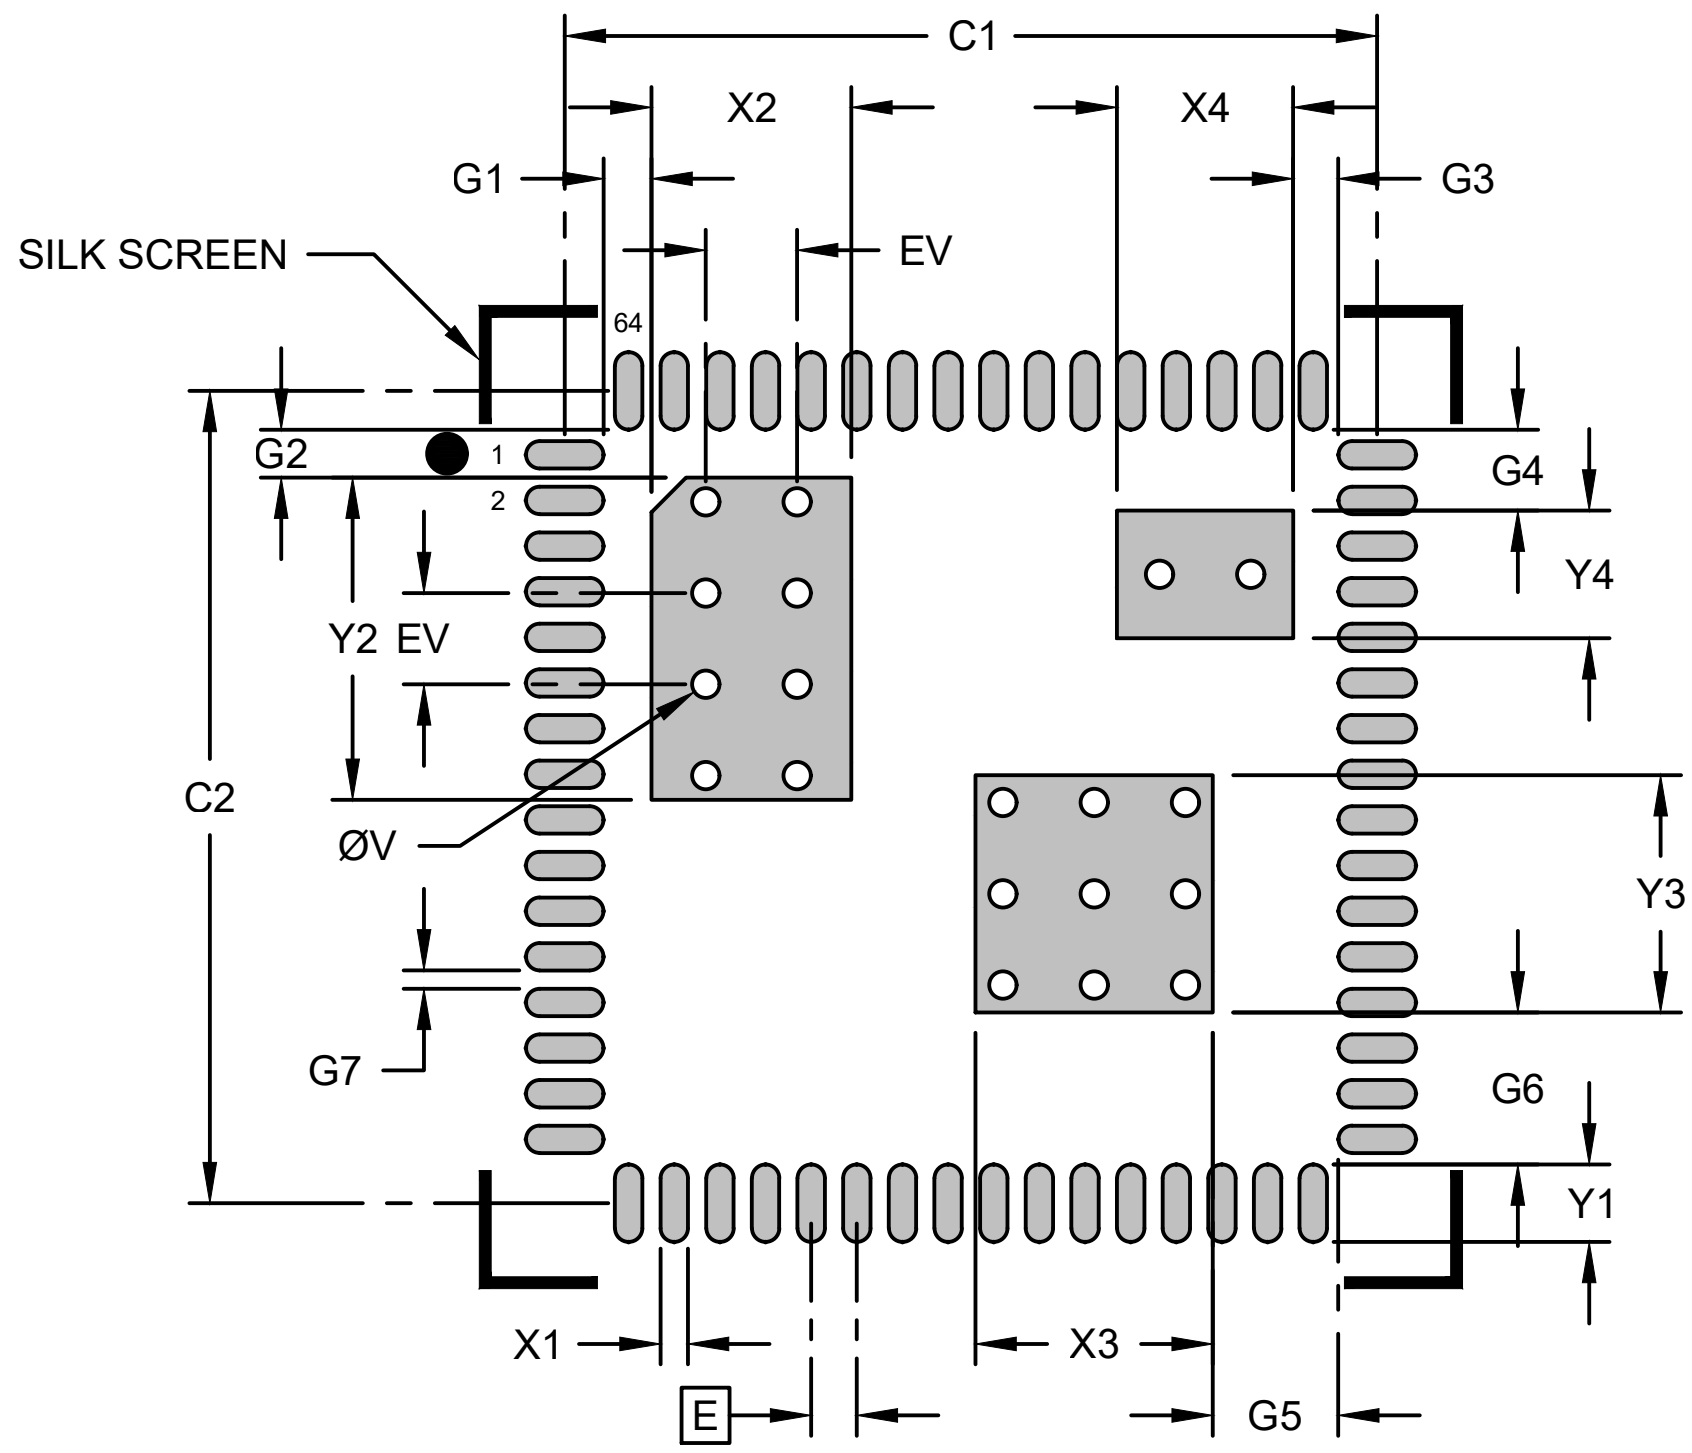

RECOMMENDED LAND PATTERN

		Units	MILLIMETERS	
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			2.19
Center Pad Length	Y2			3.53
Center Pad Width	X3			2.60
Center Pad Length	Y3			2.60
Center Pad Width	X4			1.93
Center Pad Length	Y4			1.40
Contact Pad Spacing	C1		8.90	
Contact Pad Spacing	C2		8.90	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.85
Contact Pad to Center Pad	G1	0.53		
Contact Pad to Center Pad	G2	0.53		
Contact Pad to Center Pad	G3	0.50		
Contact Pad to Center Pad	G4	0.86		
Contact Pad to Center Pad	G5	1.38		
Contact Pad to Center Pad	G6	1.67		
Contact Pad to Contact Pad	G7	0.20		
Thermal Via Diameter	V		0.30	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-02530-PSX Rev D