44-Lead Plastic Metric Quad Flatpack (PQ) - 10x10x2.0 mm Body [MQFP]
3.20 mm Footprint

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

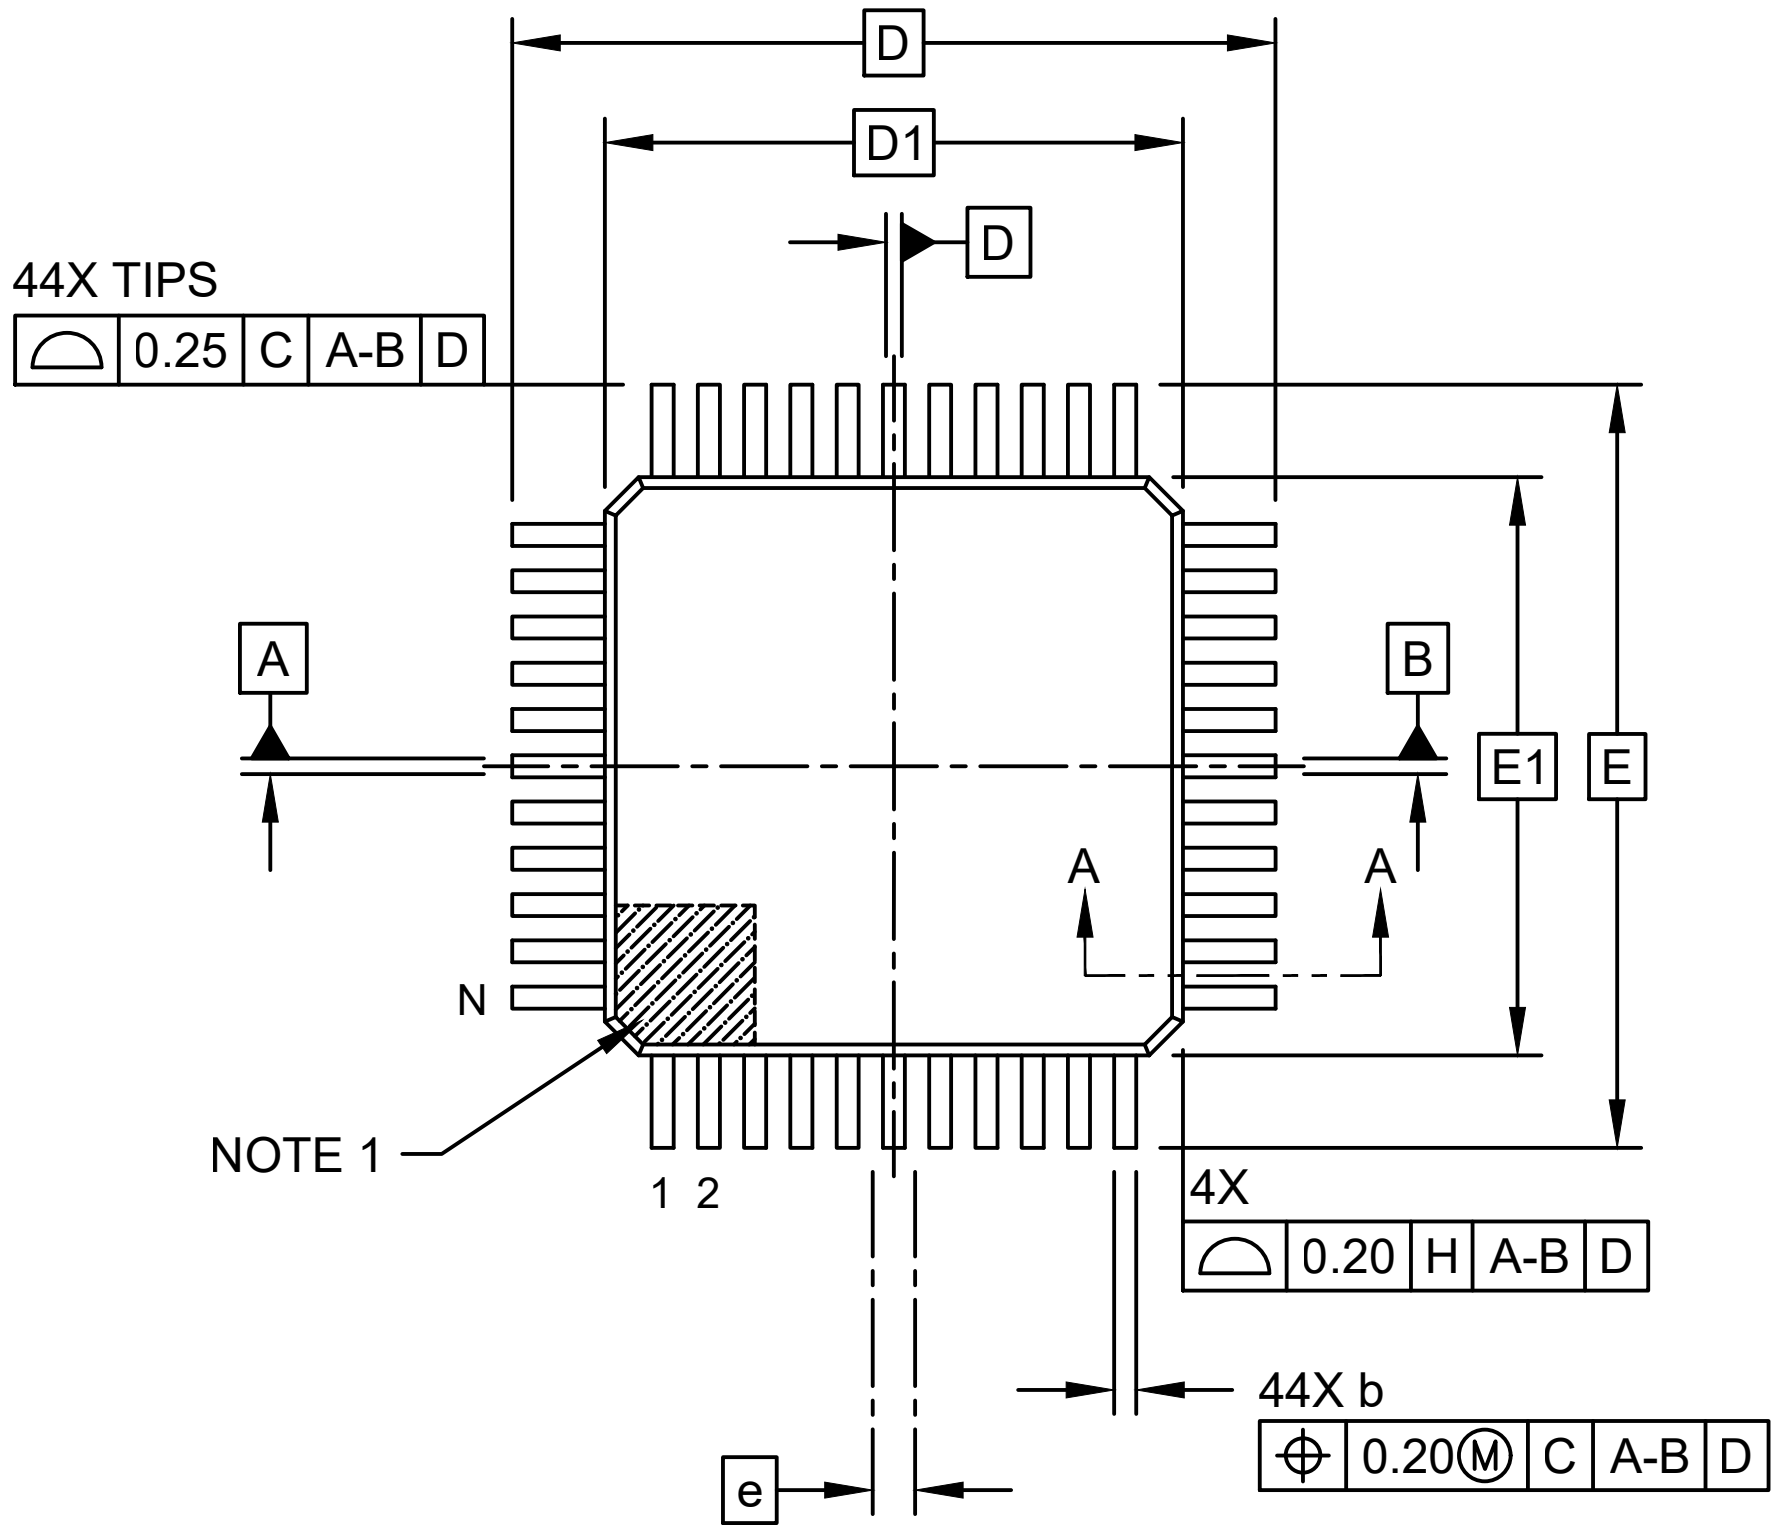

TOP VIEW

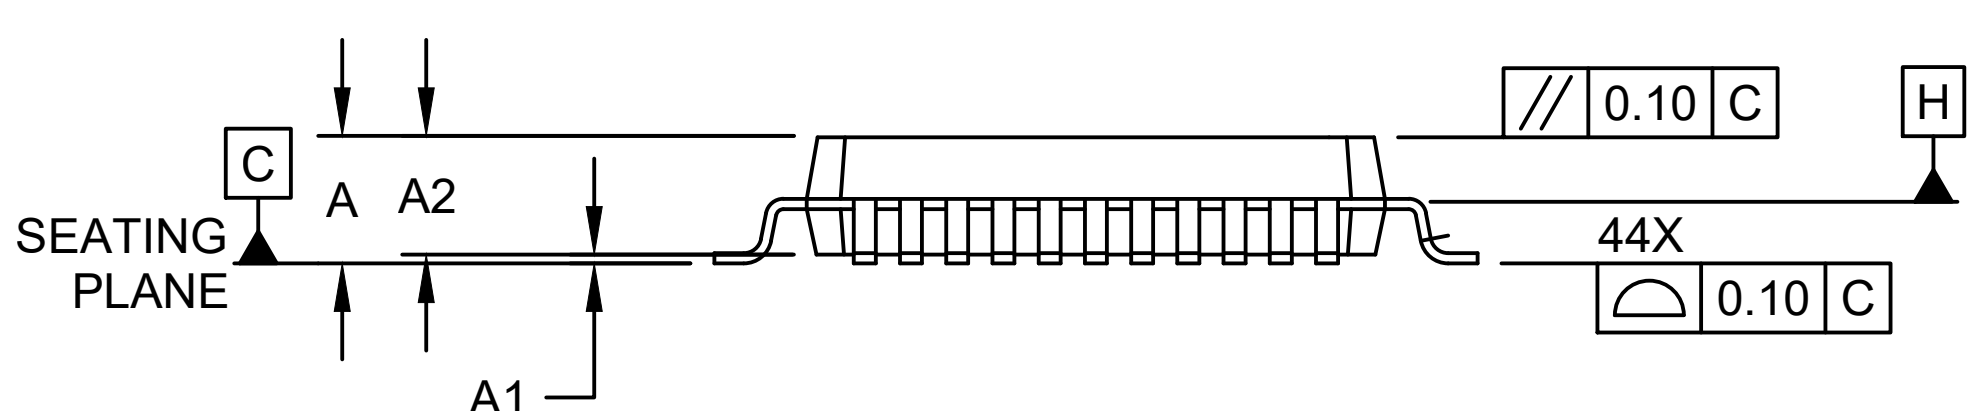

SIDE VIEW

Microchip Technology Drawing C04-00071 Rev C Sheet 1 of 2

44-Lead Plastic Metric Quad Flatpack (PQ) - 10x10x2.0 mm Body [MQFP]
3.20 mm Footprint

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

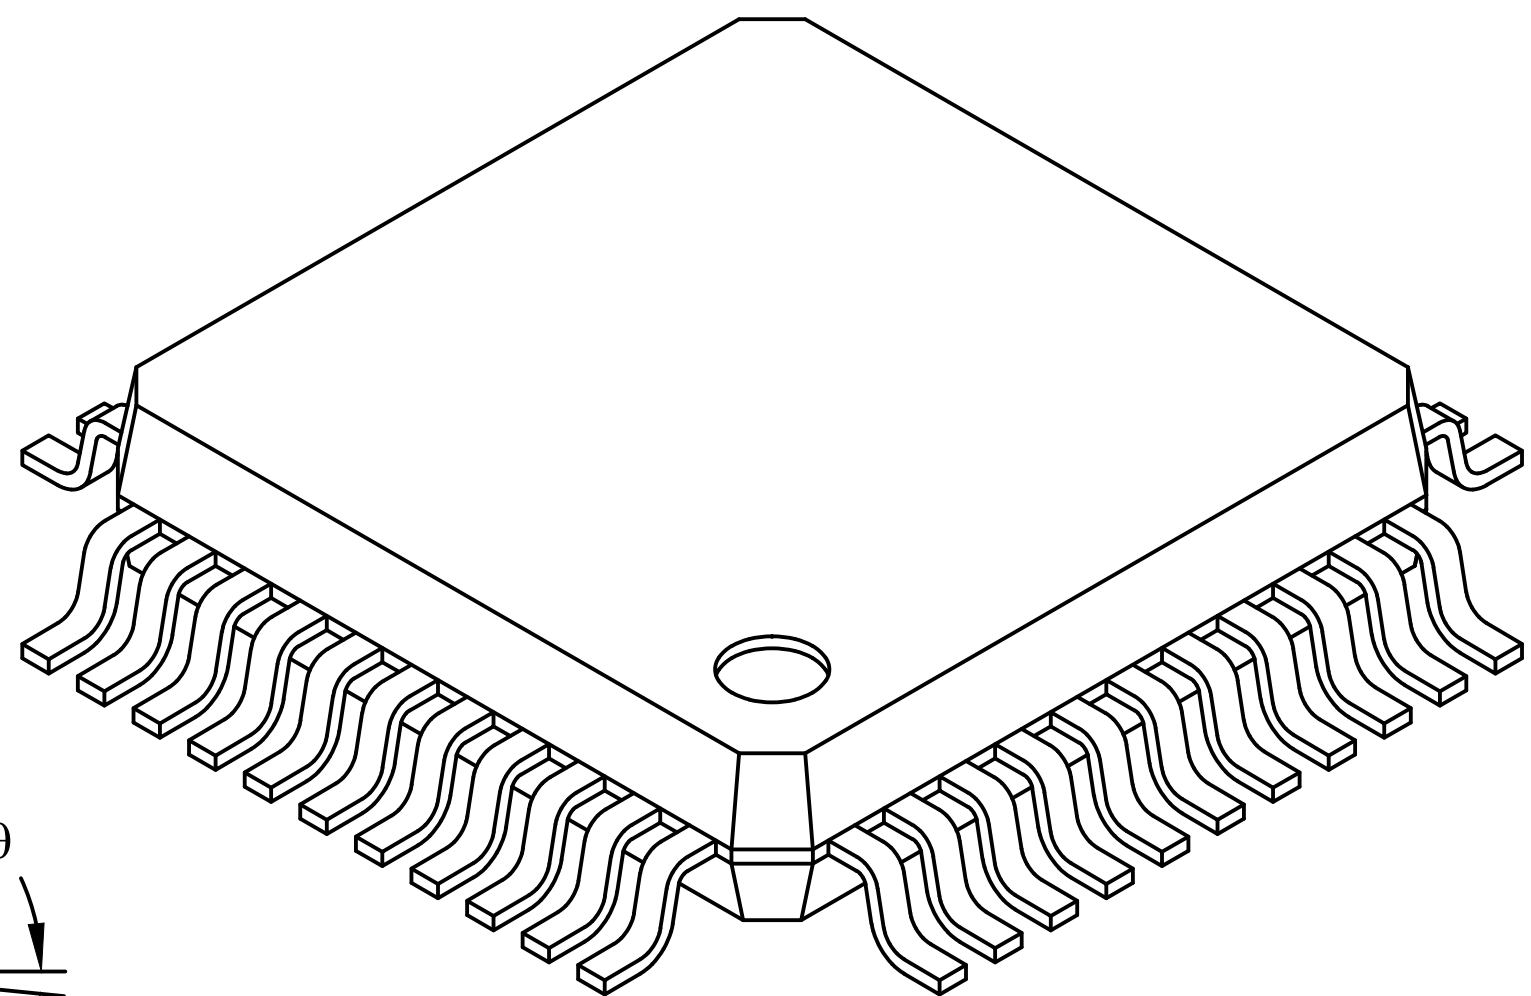

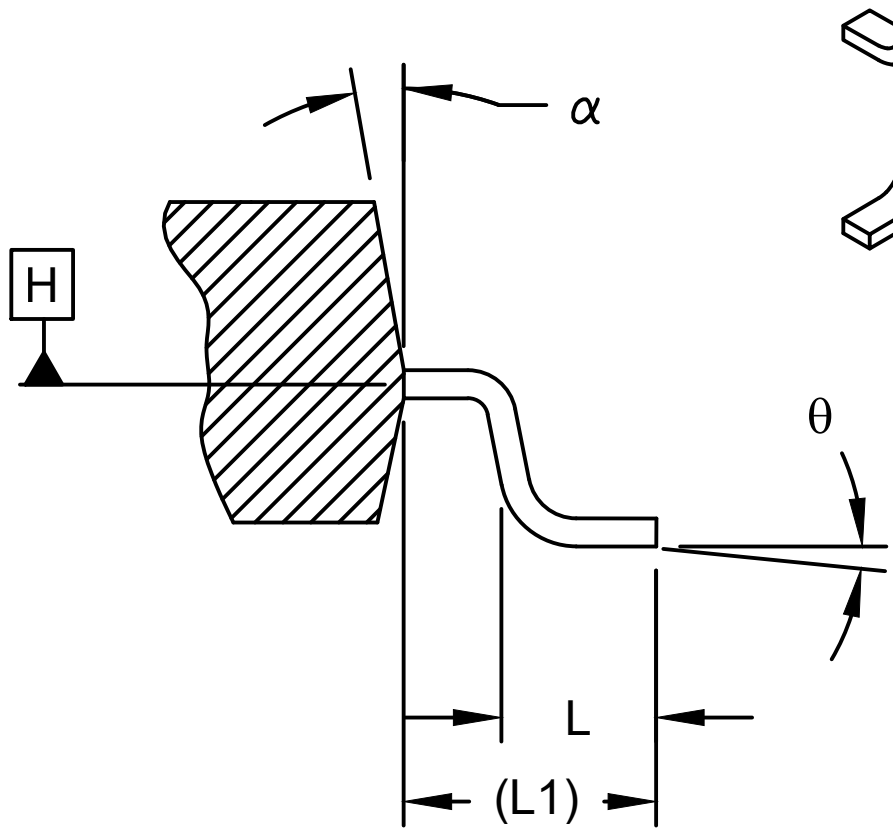

SECTION A-A

		Units	MILLIMETERS	
Dimension Limits		MIN	NOM	MAX
Number of Leads	N		44	
Lead Pitch	e		0.80 BSC	
Overall Height	A	-	-	2.45
Standoff	A1	0.00	-	0.25
Molded Package Thickness	A2	1.80	2.00	2.20
Foot Length	L	0.73	0.88	1.03
Footprint	L1		1.60 REF	
Foot Angle	θ	0°	-	7°
Overall Width	E		13.20 BSC	
Overall Length	D		13.20 BSC	
Molded Package Width	E1		10.00 BSC	
Molded Package Length	D1		10.00 BSC	
Lead Width	b	0.29	-	0.45
Mold Draft Angle Top	α	5°	-	16°

Notes:
1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00071 Rev C Sheet 2 of 2

44-Lead Plastic Metric Quad Flatpack (PQ) - 10x10x2.0 mm Body [MQFP]
3.20 mm Footprint

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

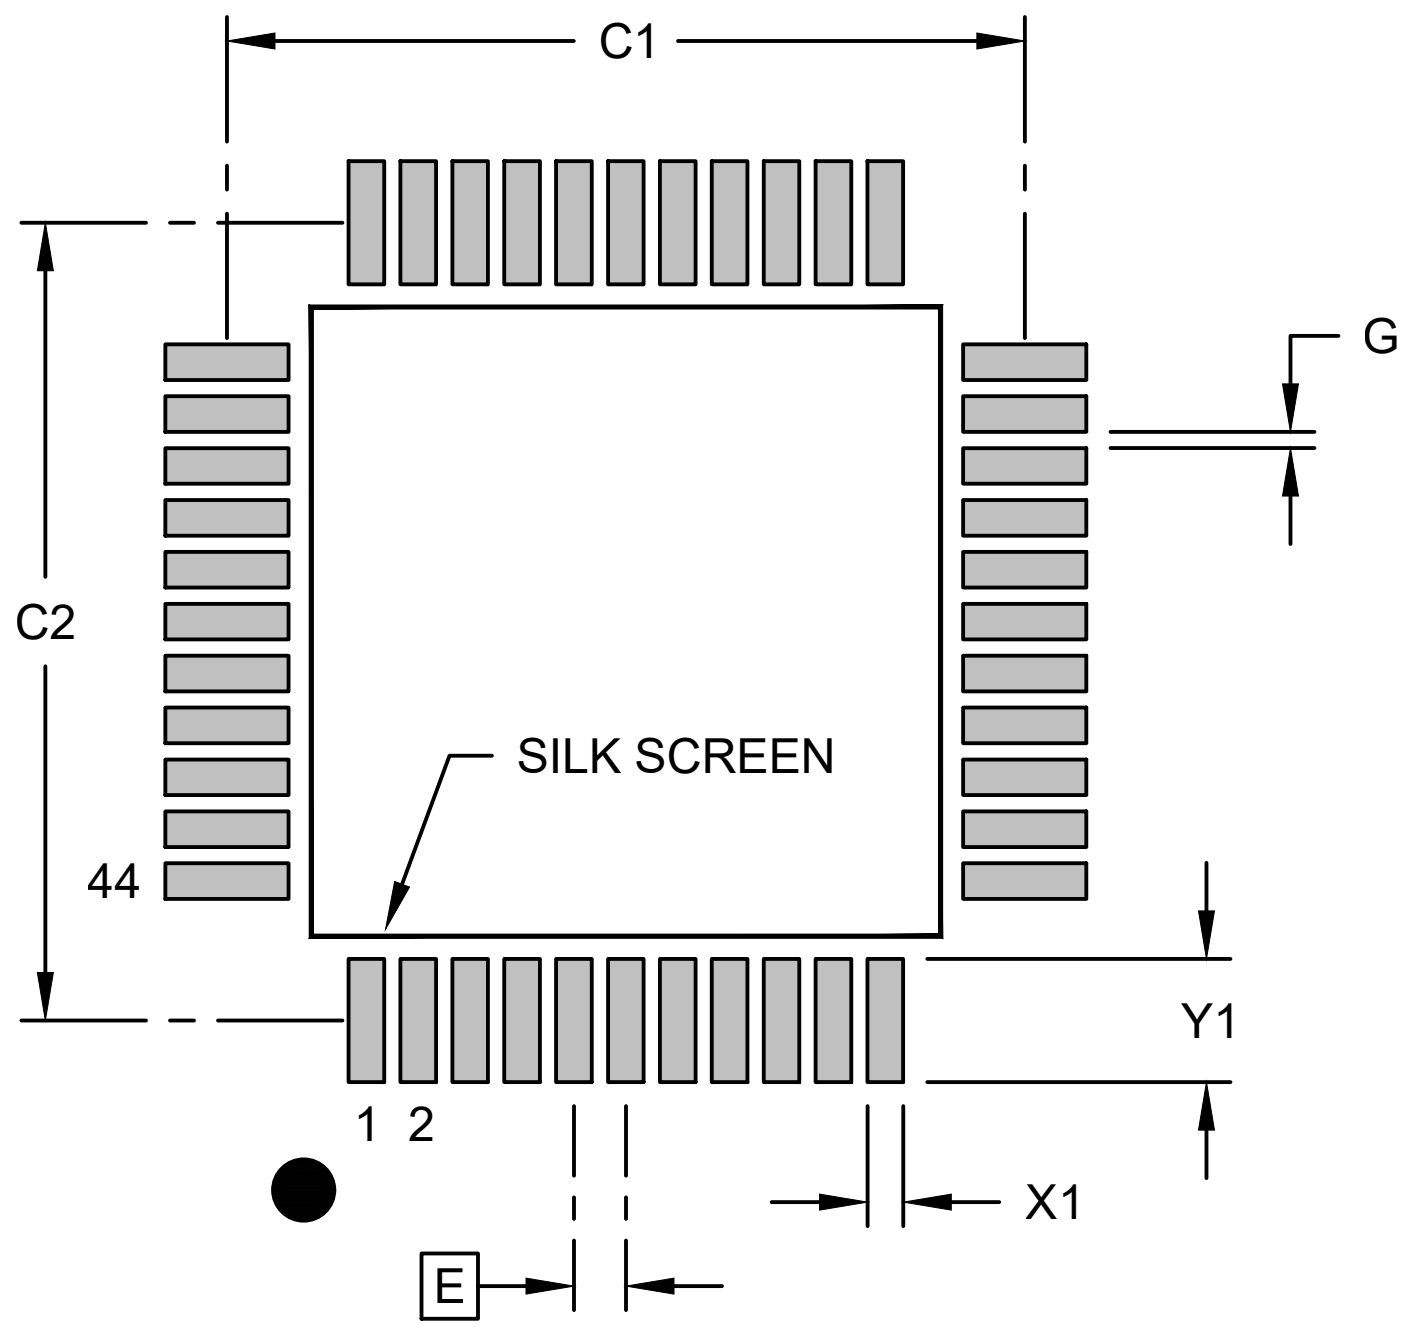

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		12.30	
Contact Pad Spacing	C2		12.30	
Contact Pad Width (X44)	X1			0.55
Contact Pad Length (X44)	Y1			1.90
Contact Pad to Contact Pad (X40)	G	0.20		

Notes:
1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-02071 Rev C

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2.0 mm Body [MQFP]
3.20 mm Footprint

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

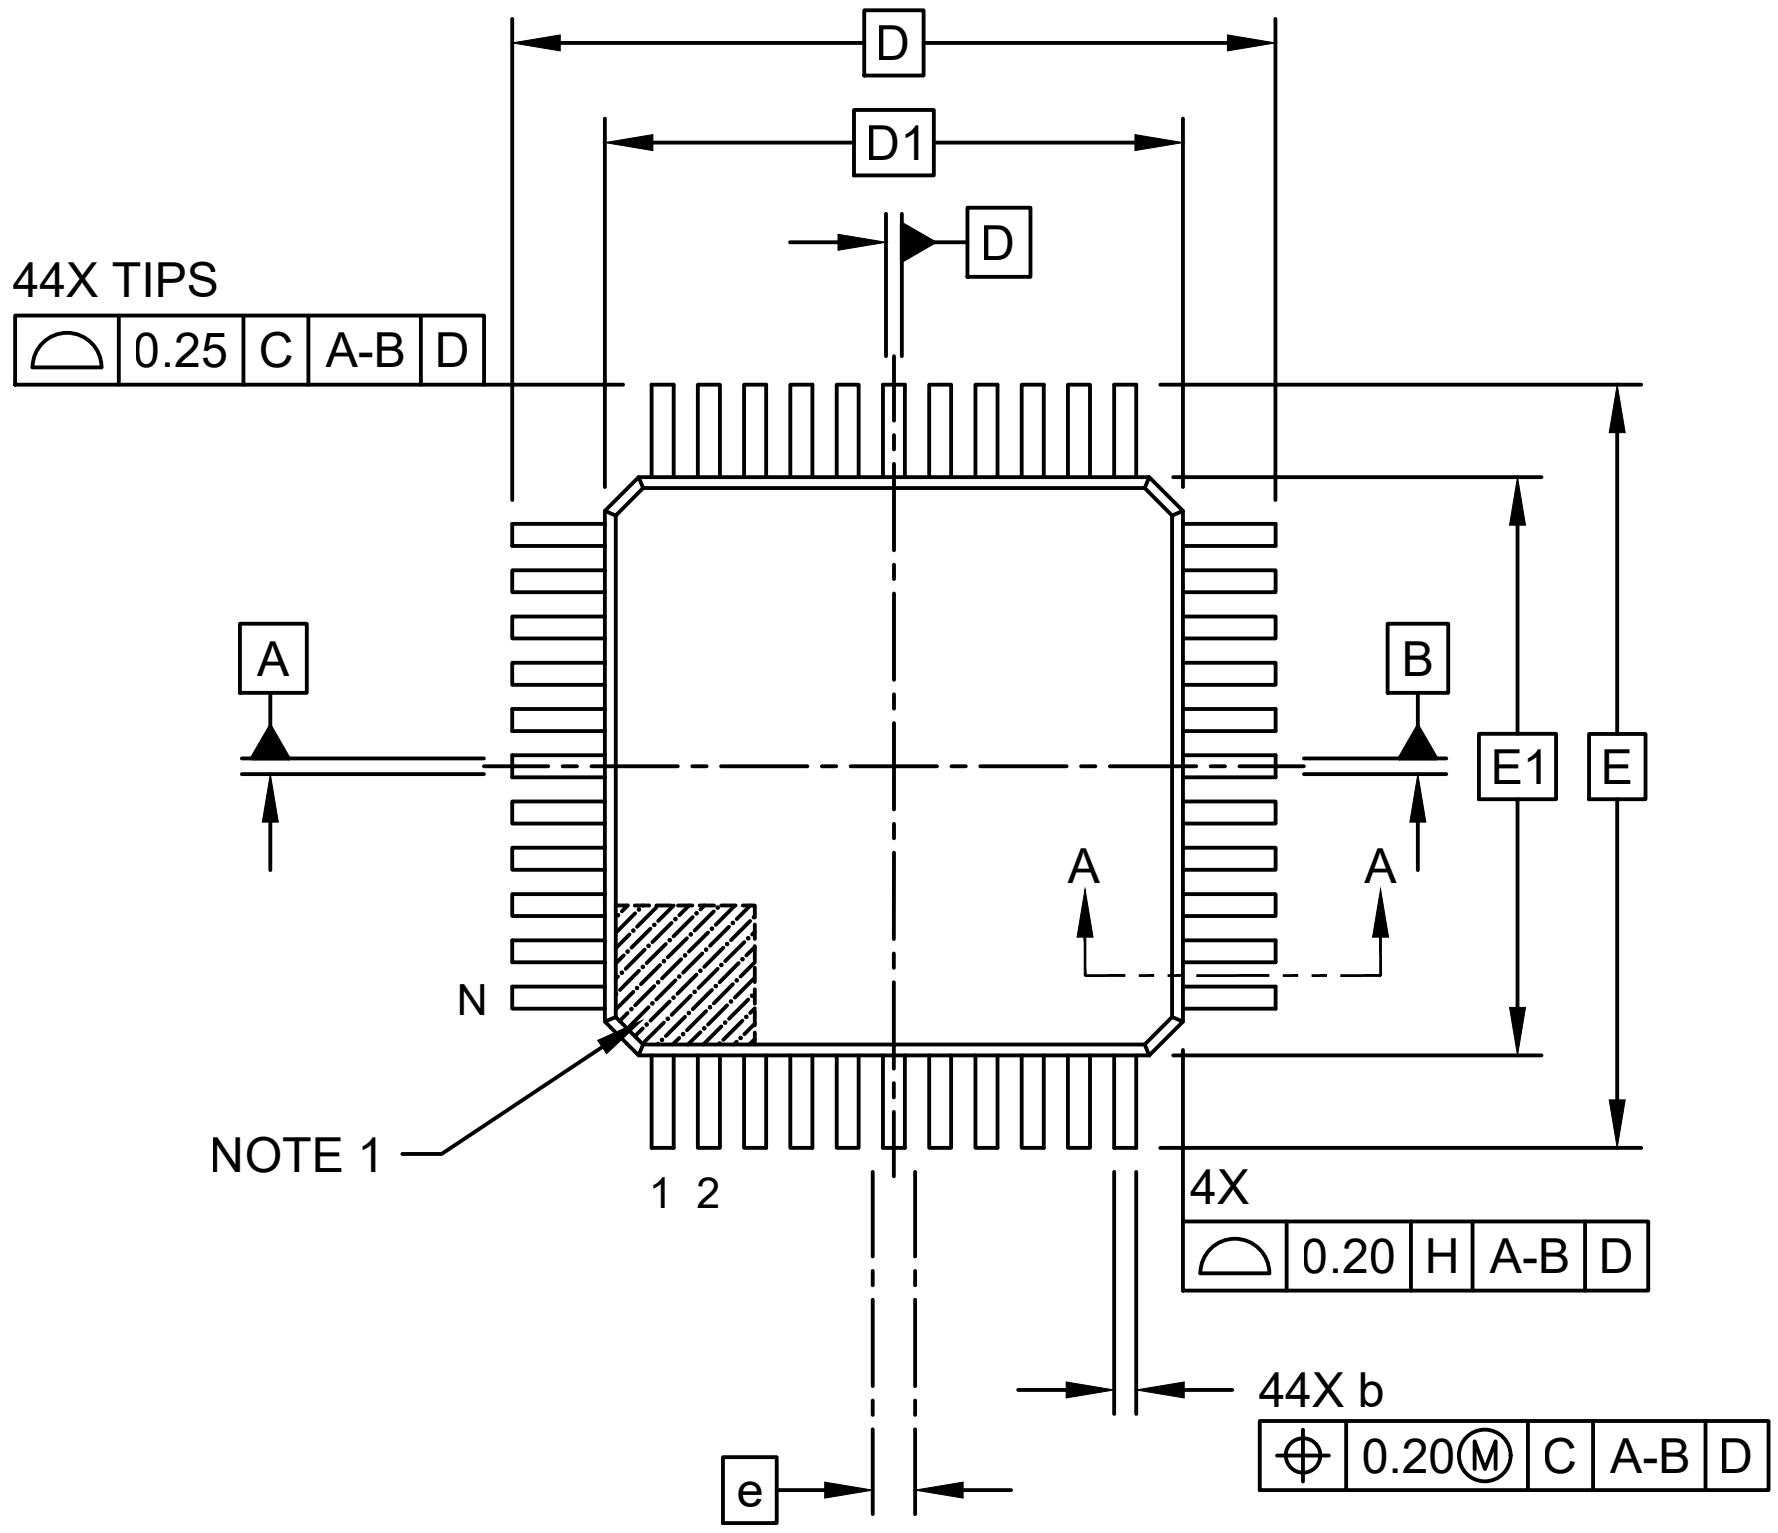

TOP VIEW

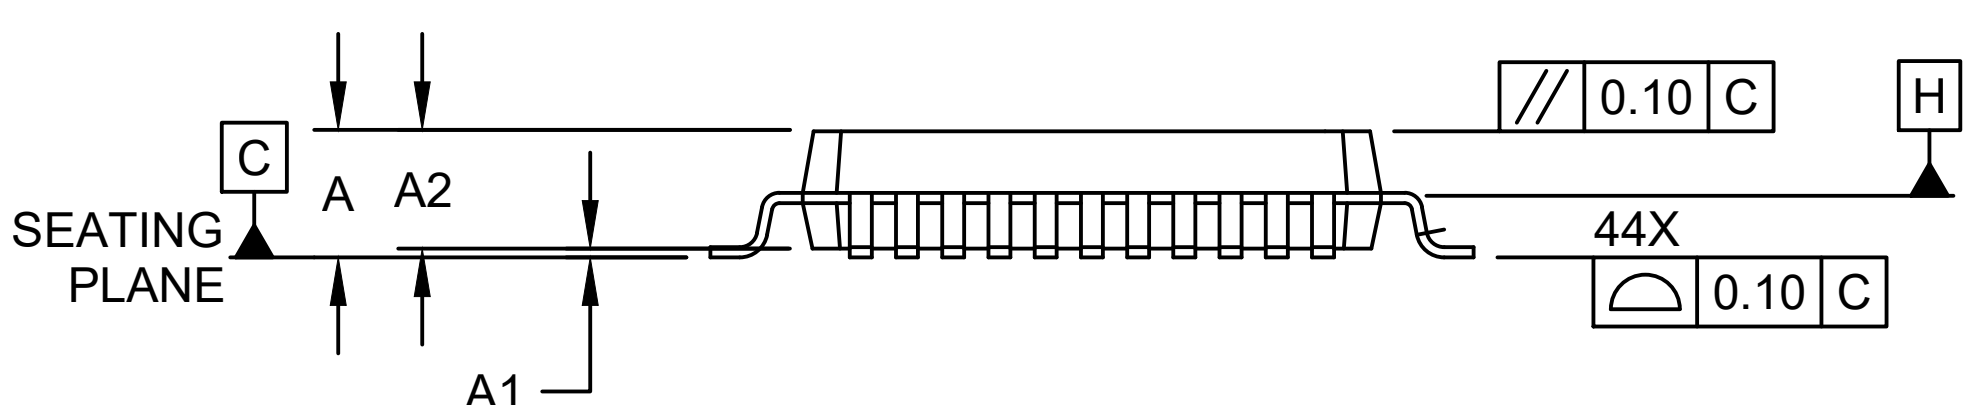

SIDE VIEW

Microchip Technology Drawing C04-00071 Rev C Sheet 1 of 2

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2.0 mm Body [MQFP]
3.20 mm Footprint

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

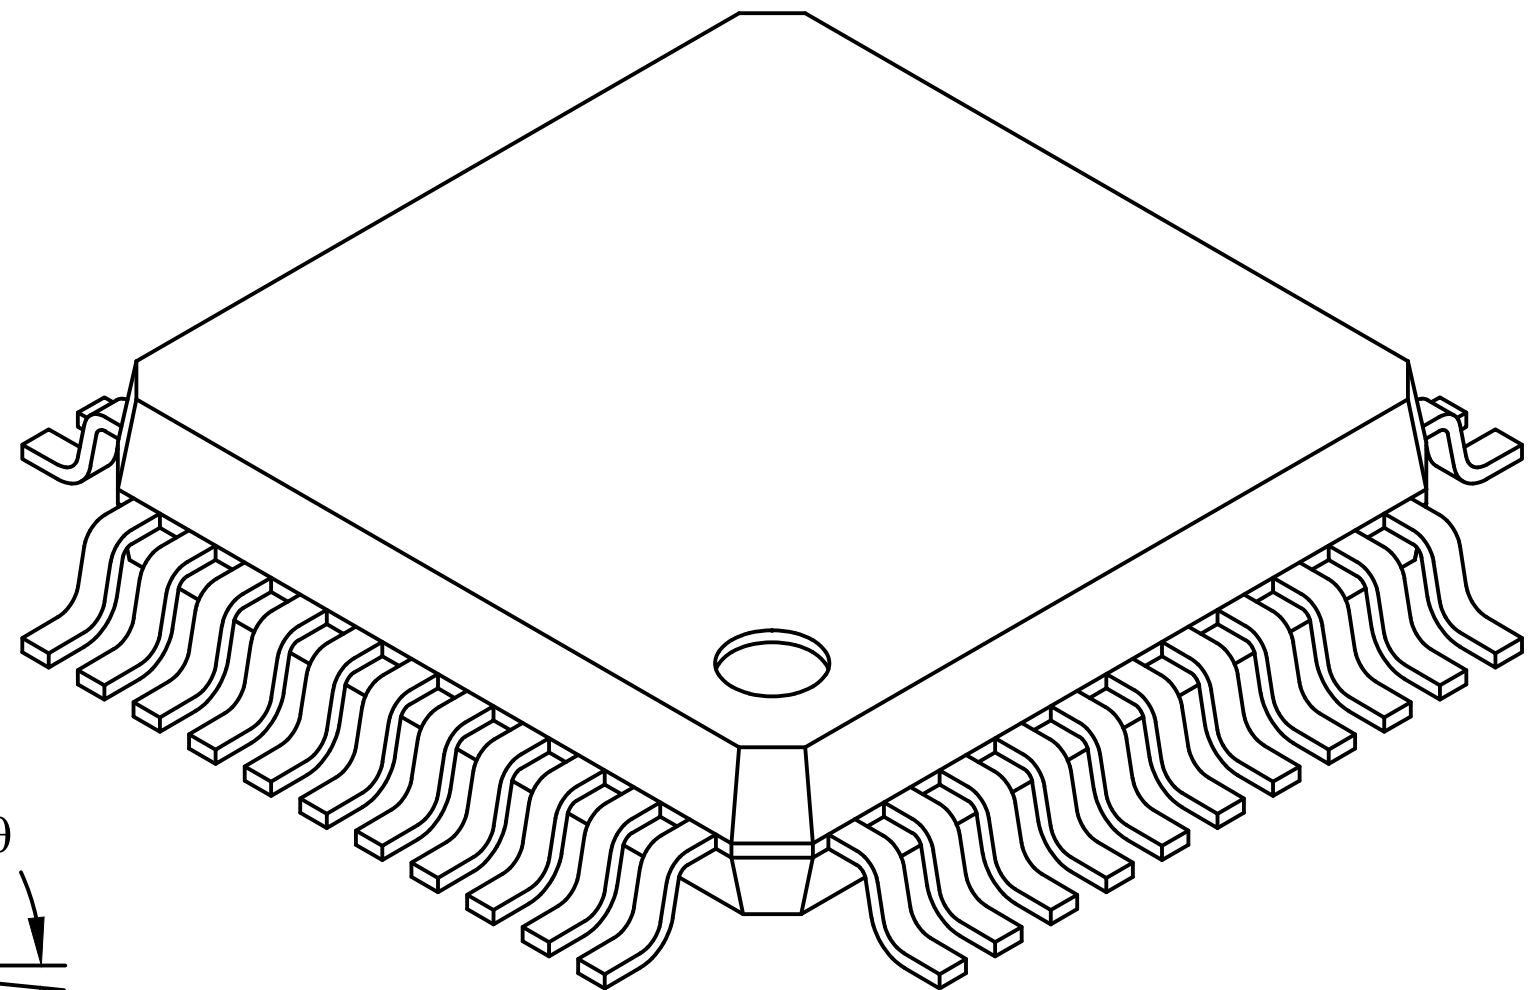

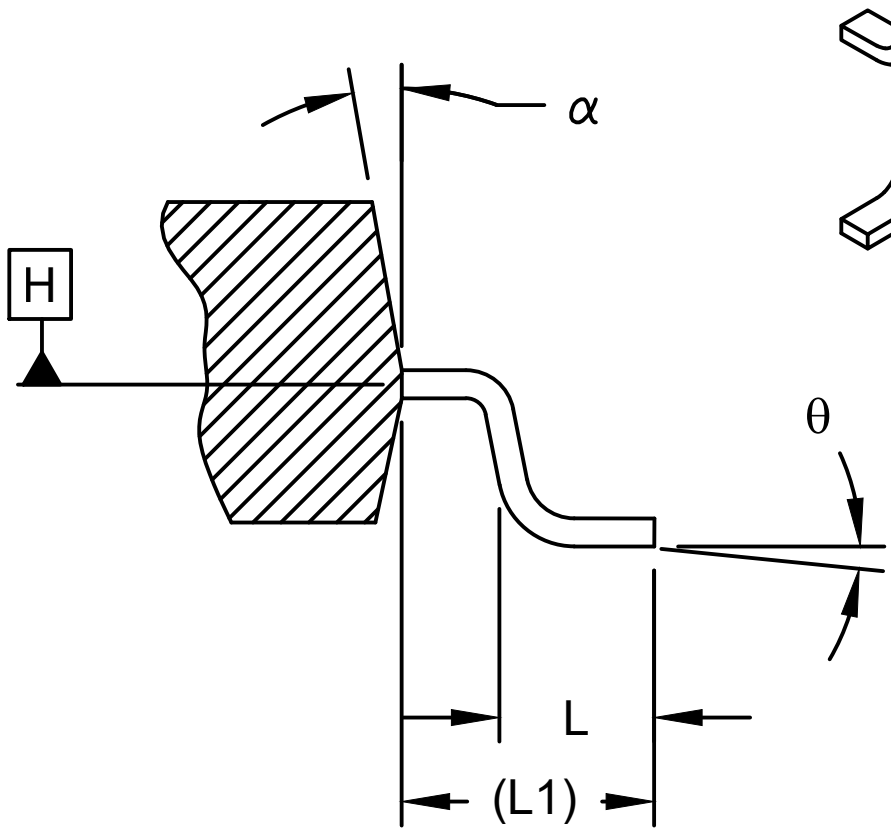

SECTION A-A

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Leads	N	44		
Lead Pitch	e	0.80 BSC		
Overall Height	A	-	-	2.45
Standoff	A1	0.00	-	0.25
Molded Package Thickness	A2	1.80	2.00	2.20
Foot Length	L	0.73	0.88	1.03
Footprint	L1	1.60 REF		
Foot Angle	θ	0°	-	7°
Overall Width	E	13.20 BSC		
Overall Length	D	13.20 BSC		
Molded Package Width	E1	10.00 BSC		
Molded Package Length	D1	10.00 BSC		
Lead Width	b	0.29	-	0.45
Mold Draft Angle Top	α	5°	-	16°

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M

    BSC: Basic Dimension. Theoretically exact value shown without tolerances.

    REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-00071 Rev C Sheet 2 of 2

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2.0 mm Body [MQFP] 3.20 mm Footprint

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

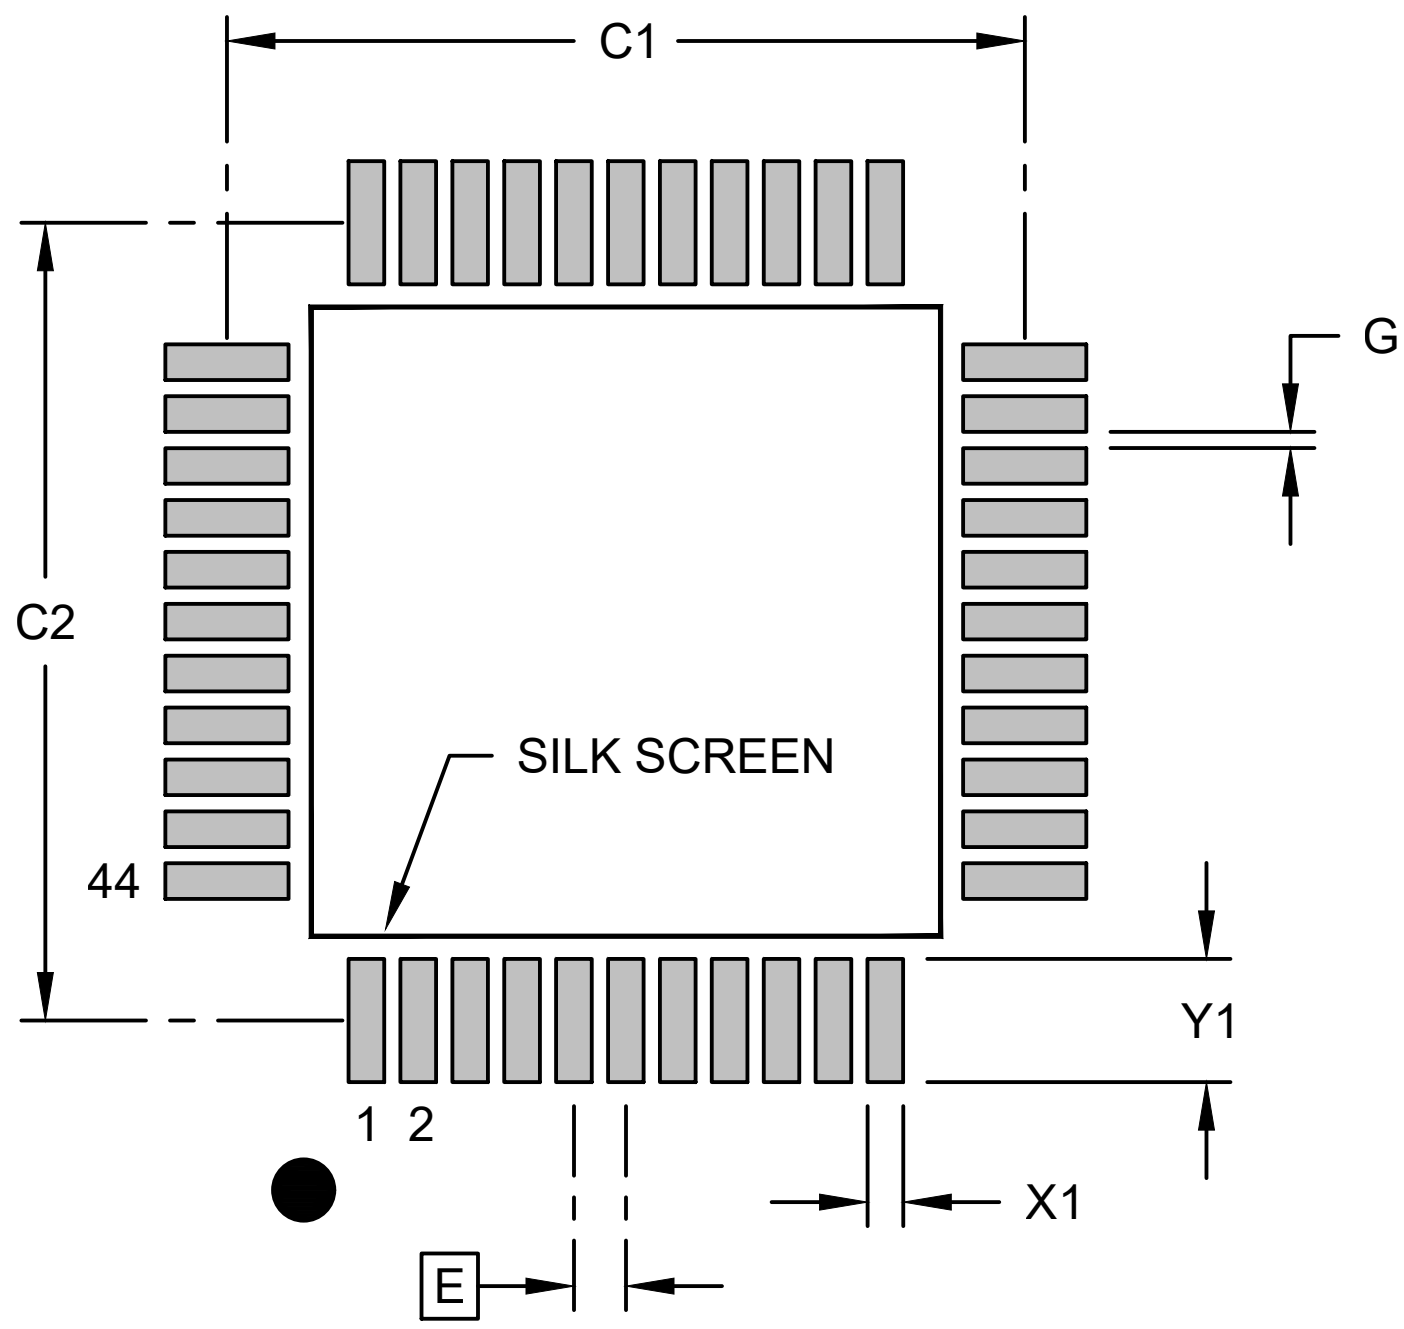

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		12.30	
Contact Pad Spacing	C2		12.30	
Contact Pad Width (X44)	X1			0.55
Contact Pad Length (X44)	Y1			1.90
Contact Pad to Contact Pad (X40)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-02071 Rev C