32-Lead Very Thin Plastic Quad Flat, No Lead Package (QJA) - 6x6x0.9 mm Body [VQFN] With Fused Leads, Multiple Exposed Pads and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

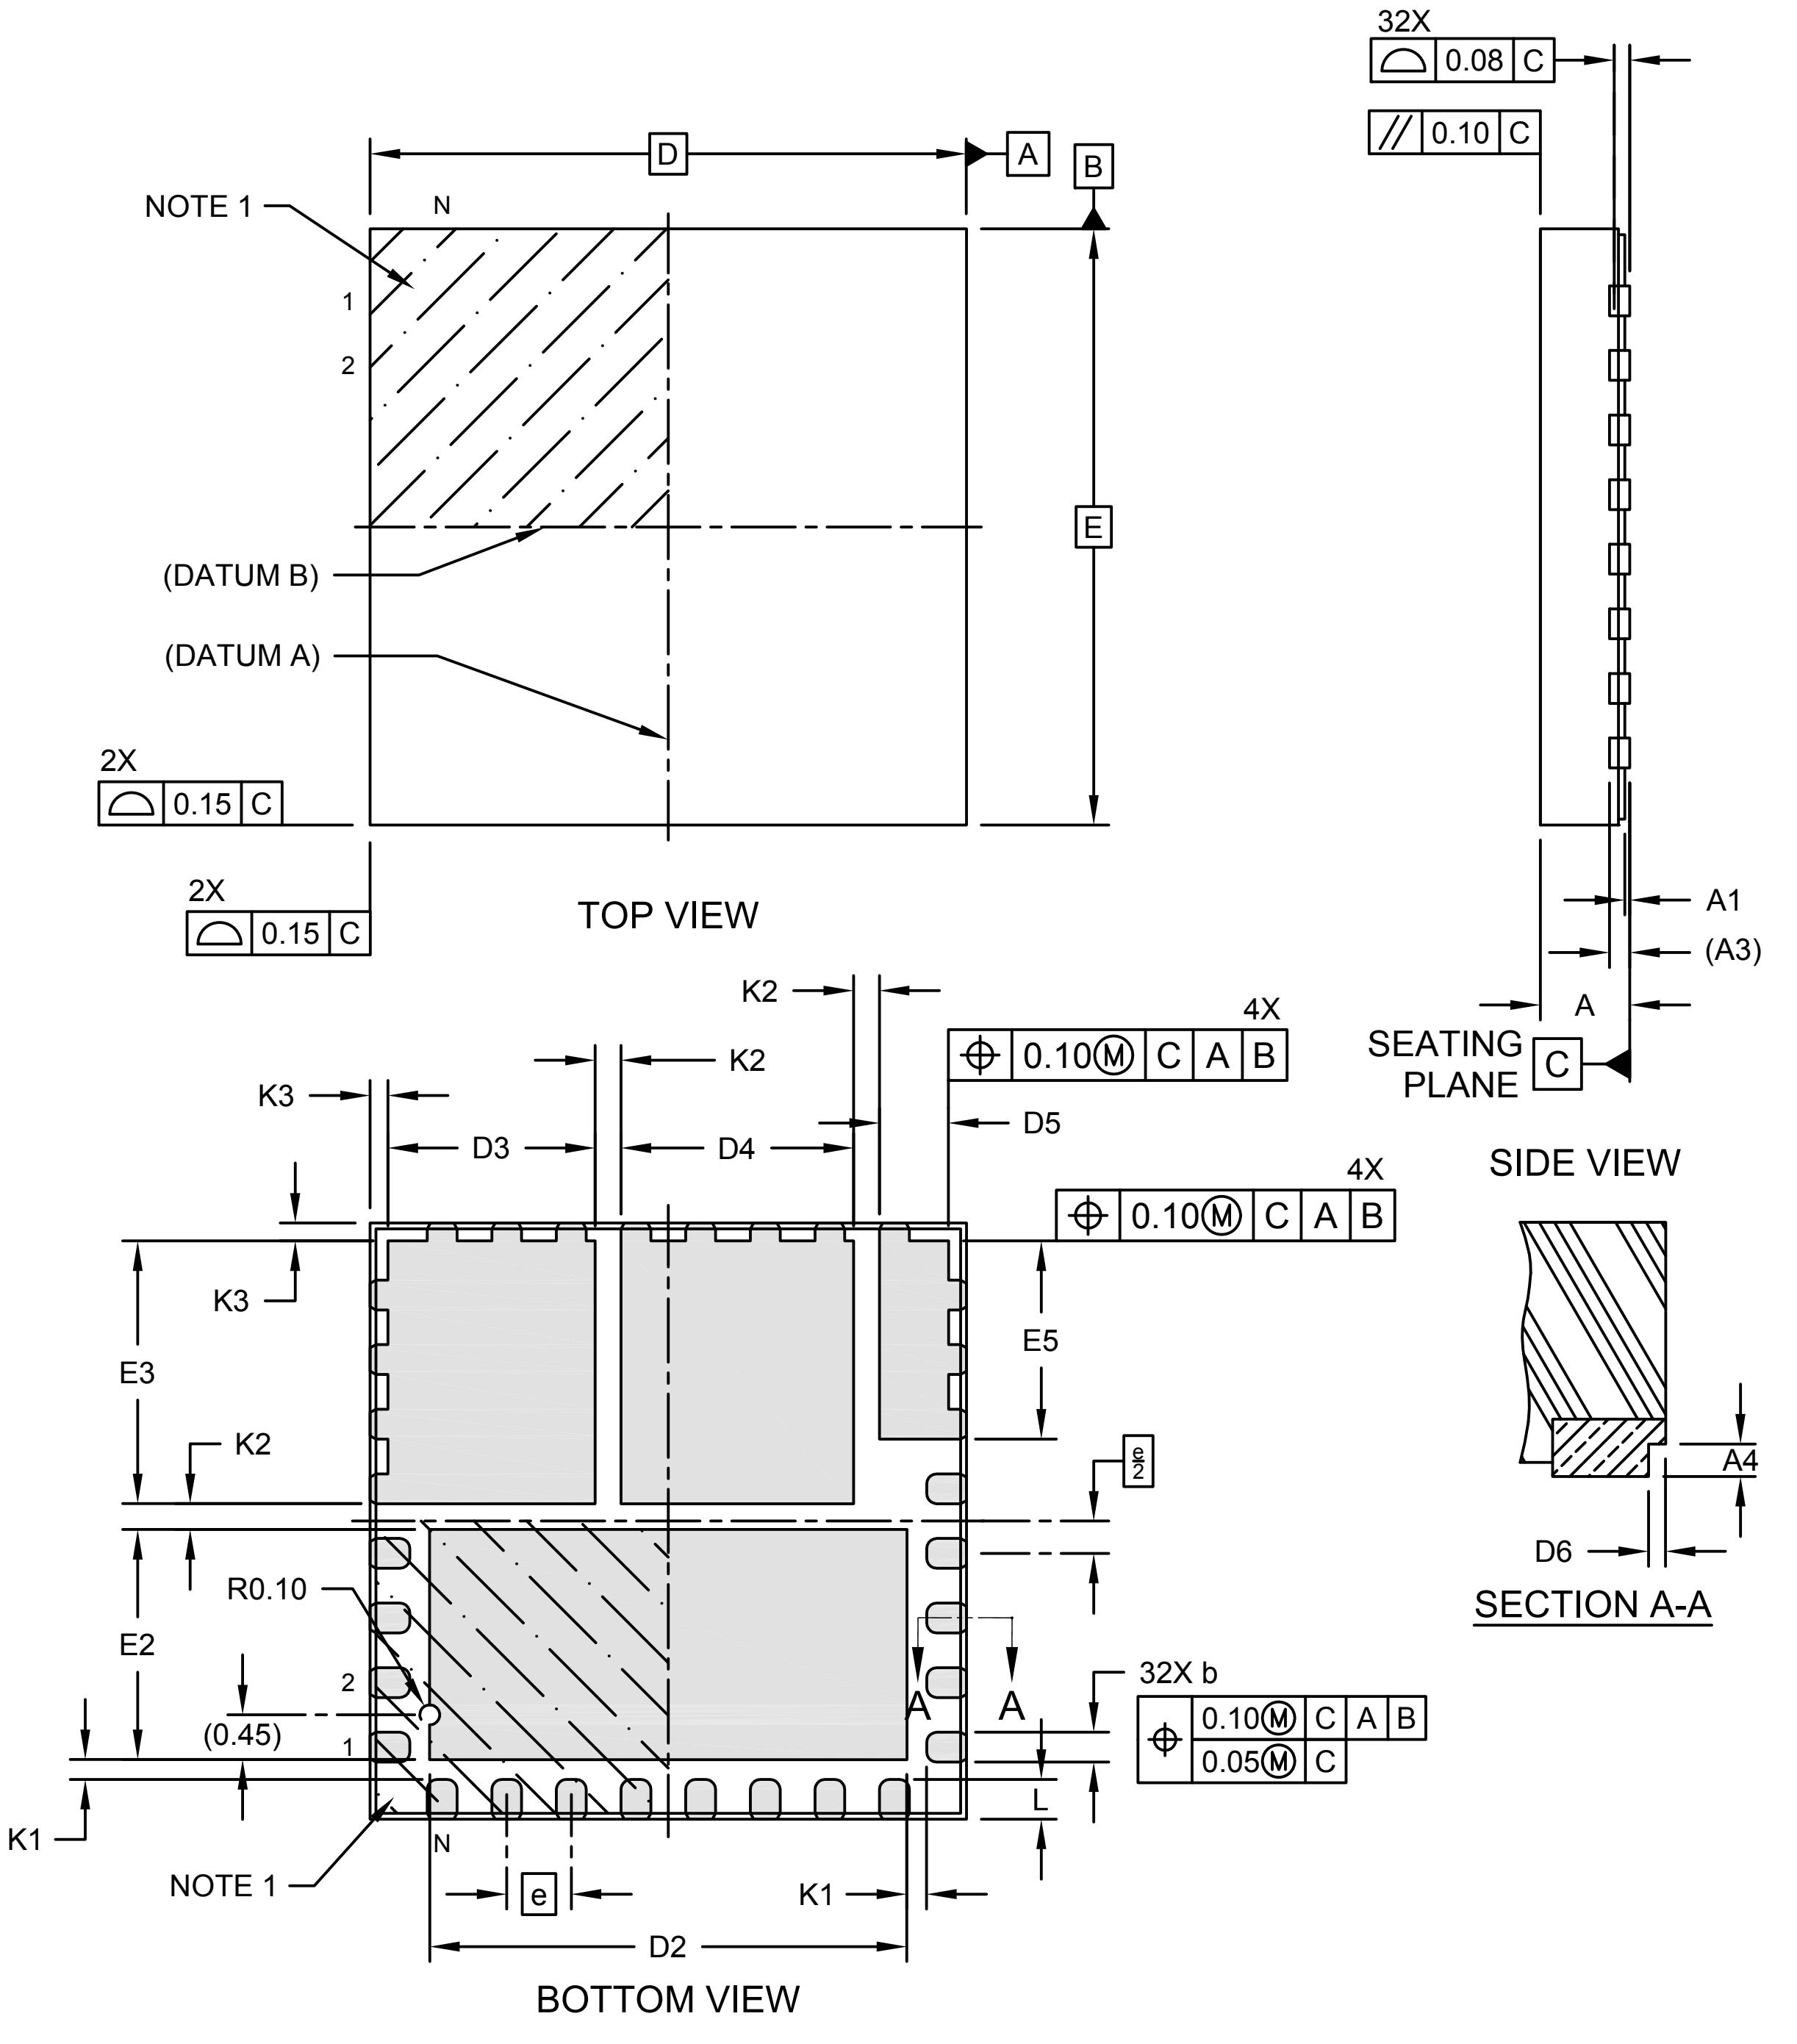

Microchip Technology Drawing C04-1280 Rev A Sheet 1 of 2

32-Lead Very Thin Plastic Quad Flat, No Lead Package (QJA) - 6x6x0.9 mm Body [VQFN] With Fused Leads, Multiple Exposed Pads and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

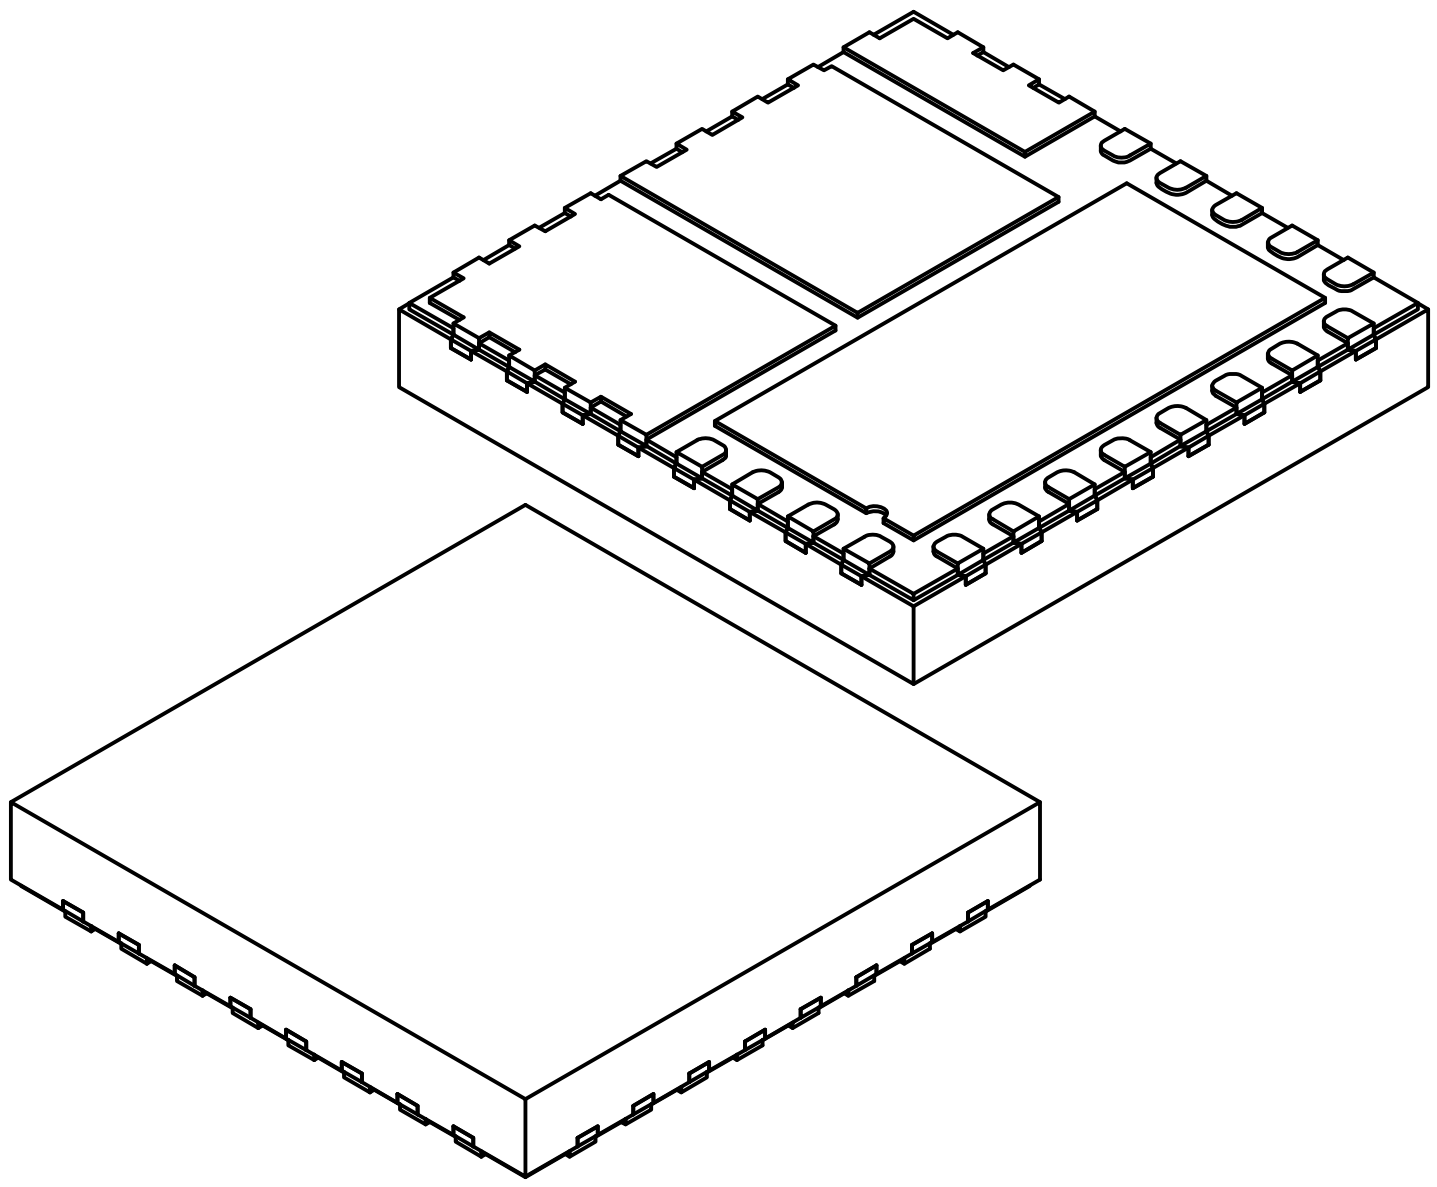

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N		000	
Pitch	e		0.65 BSC	
Overall Height	A	-	-	0.90
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.203 REF	
Overall Length	D		6.00 BSC	
Overall Width	E		6.00 BSC	
Exposed Pad Length	D2	4.70	4.80	4.90
Exposed Pad Width	E2	2.215	2.315	2.415
Exposed Pad Length	D3	1.985	2.085	2.185
Exposed Pad Length	D4	2.240	2.340	2.440
Exposed Pad Width	E3	2.545	2.645	2.745
Exposed Pad Length	D5	0.595	0.695	0.795
Exposed Pad Width	E5	1.895	1.995	2.095
Terminal Width	b	0.25	0.30	0.35
Terminal Length	L	0.30	0.40	0.50
Terminal-to-Exposed Pad	K1	0.20	-	-
Exposed Padl-to-Exposed Pad	K2	0.26	-	-
Package Edge-to-Exposed Pad	K3	0.18	-	-
Step Height	A4	0.10	-	-
Step Length	D6	0.01	-	0.06

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-1280 Rev A Sheet 2 of 2

32-Lead Very Thin Plastic Quad Flat, No Lead Package (QJA) - 6x6x0.9 mm Body [VQFN] With Fused Leads, Multiple Exposed Pads and Stepped Wettable Flanks

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

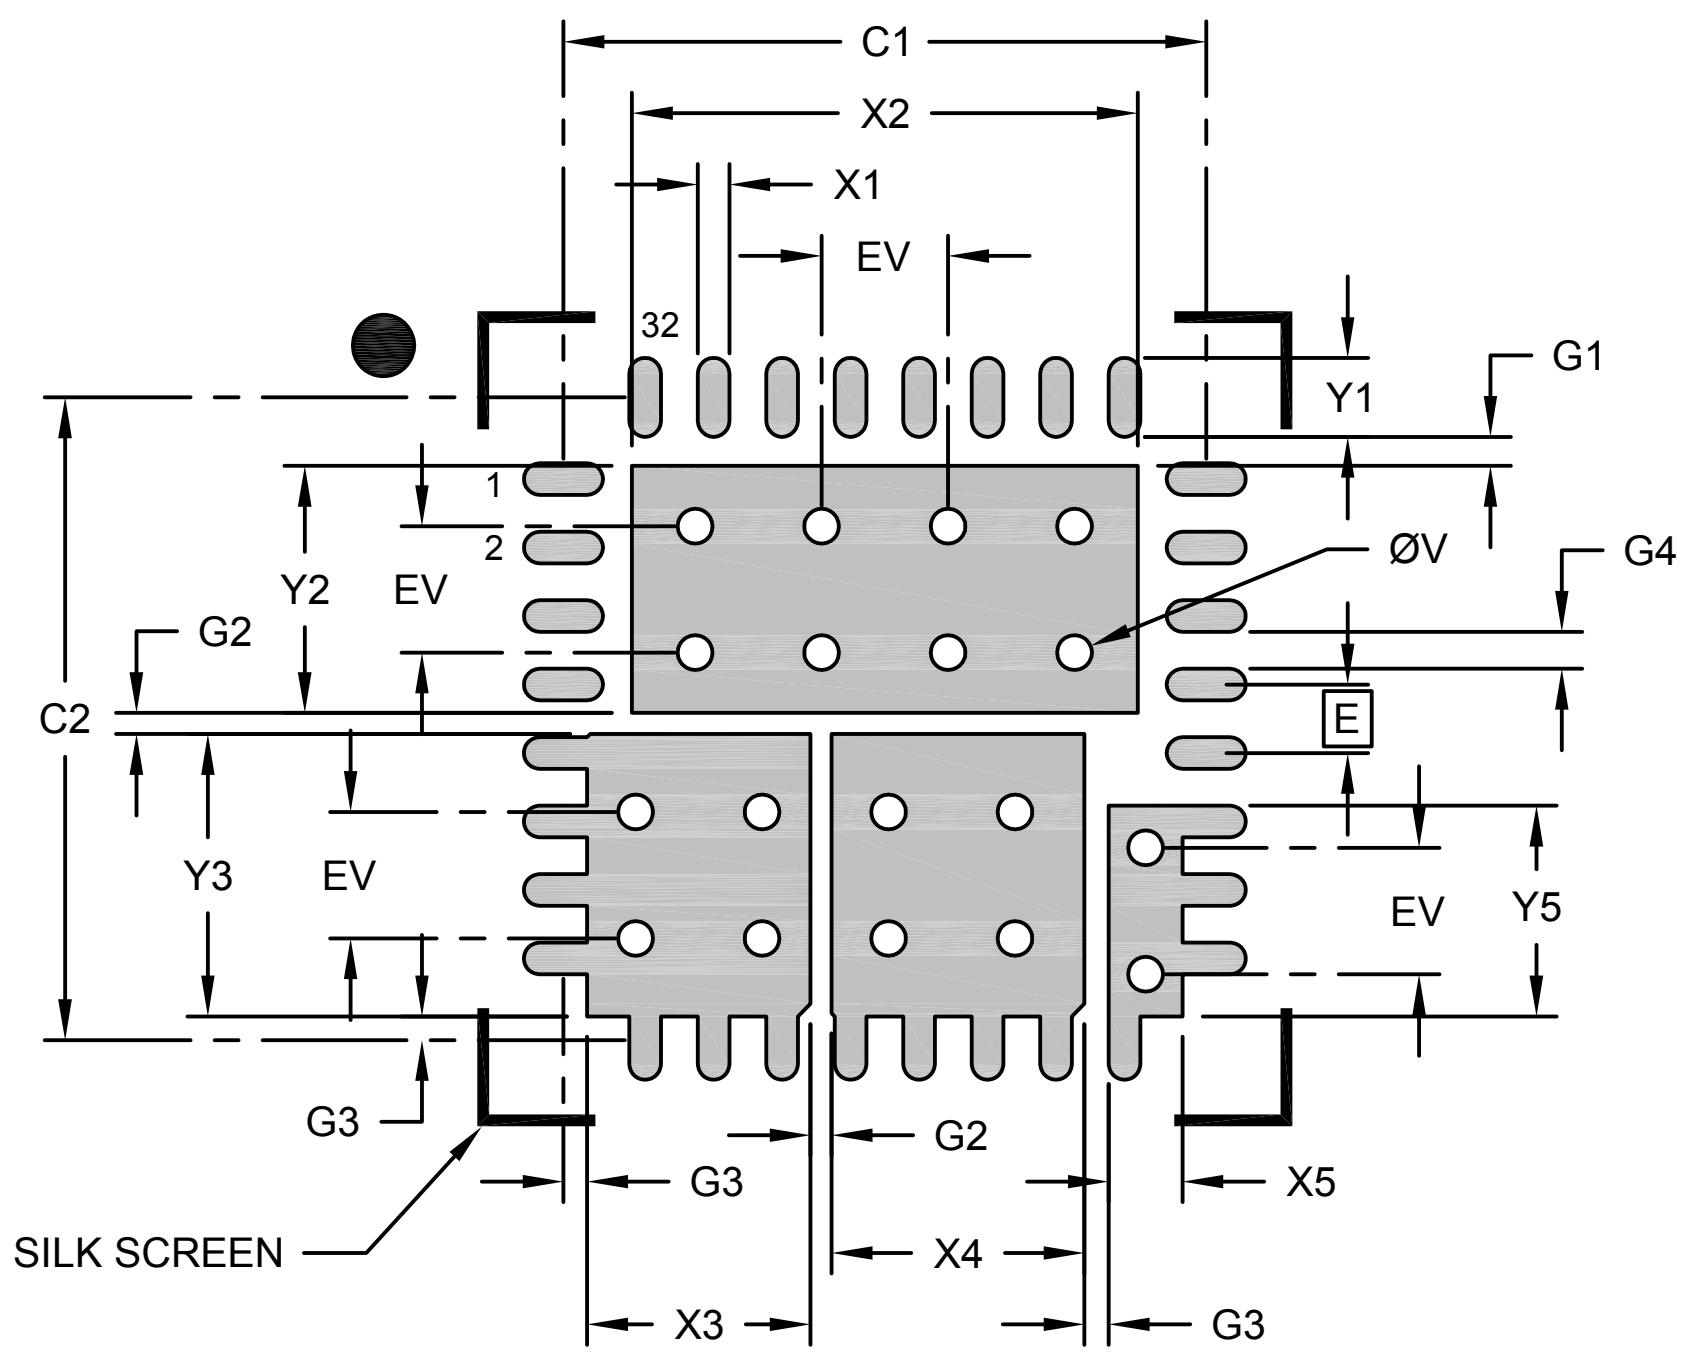

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65BSC	
Contact Pad Spacing	C1		6.10	
Contact Pad Spacing	C2		6.10	
Contact Pad Width (X32)	X1			0.30
Contact Pad Length (X17)	Y1			0.75
Center Pad Width	X2			4.80
Center Pad Length	Y2			2.35
Center Pad Width	X3			2.12
Center Pad Length	Y3			2.68
Center Pad Width	X4			4.20
Center Pad Width	X5			0.70
Center Pad Length	Y5			2.00
Pad Spacing	G1	0.28		
Pad Spacing	G2	0.20		
Pad Spacing	G3	0.23		
Pad Spacing	G4	0.35		
Thermal Via Diameter (X18)	V		0.33	
Thermal Via Pitch	EV		1.20	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-3280 Rev A