80-Lead Metric Plastic Quad Flat Pack (U7) - 20x14 mm Body [PQFP]
Supertex Legacy Package

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

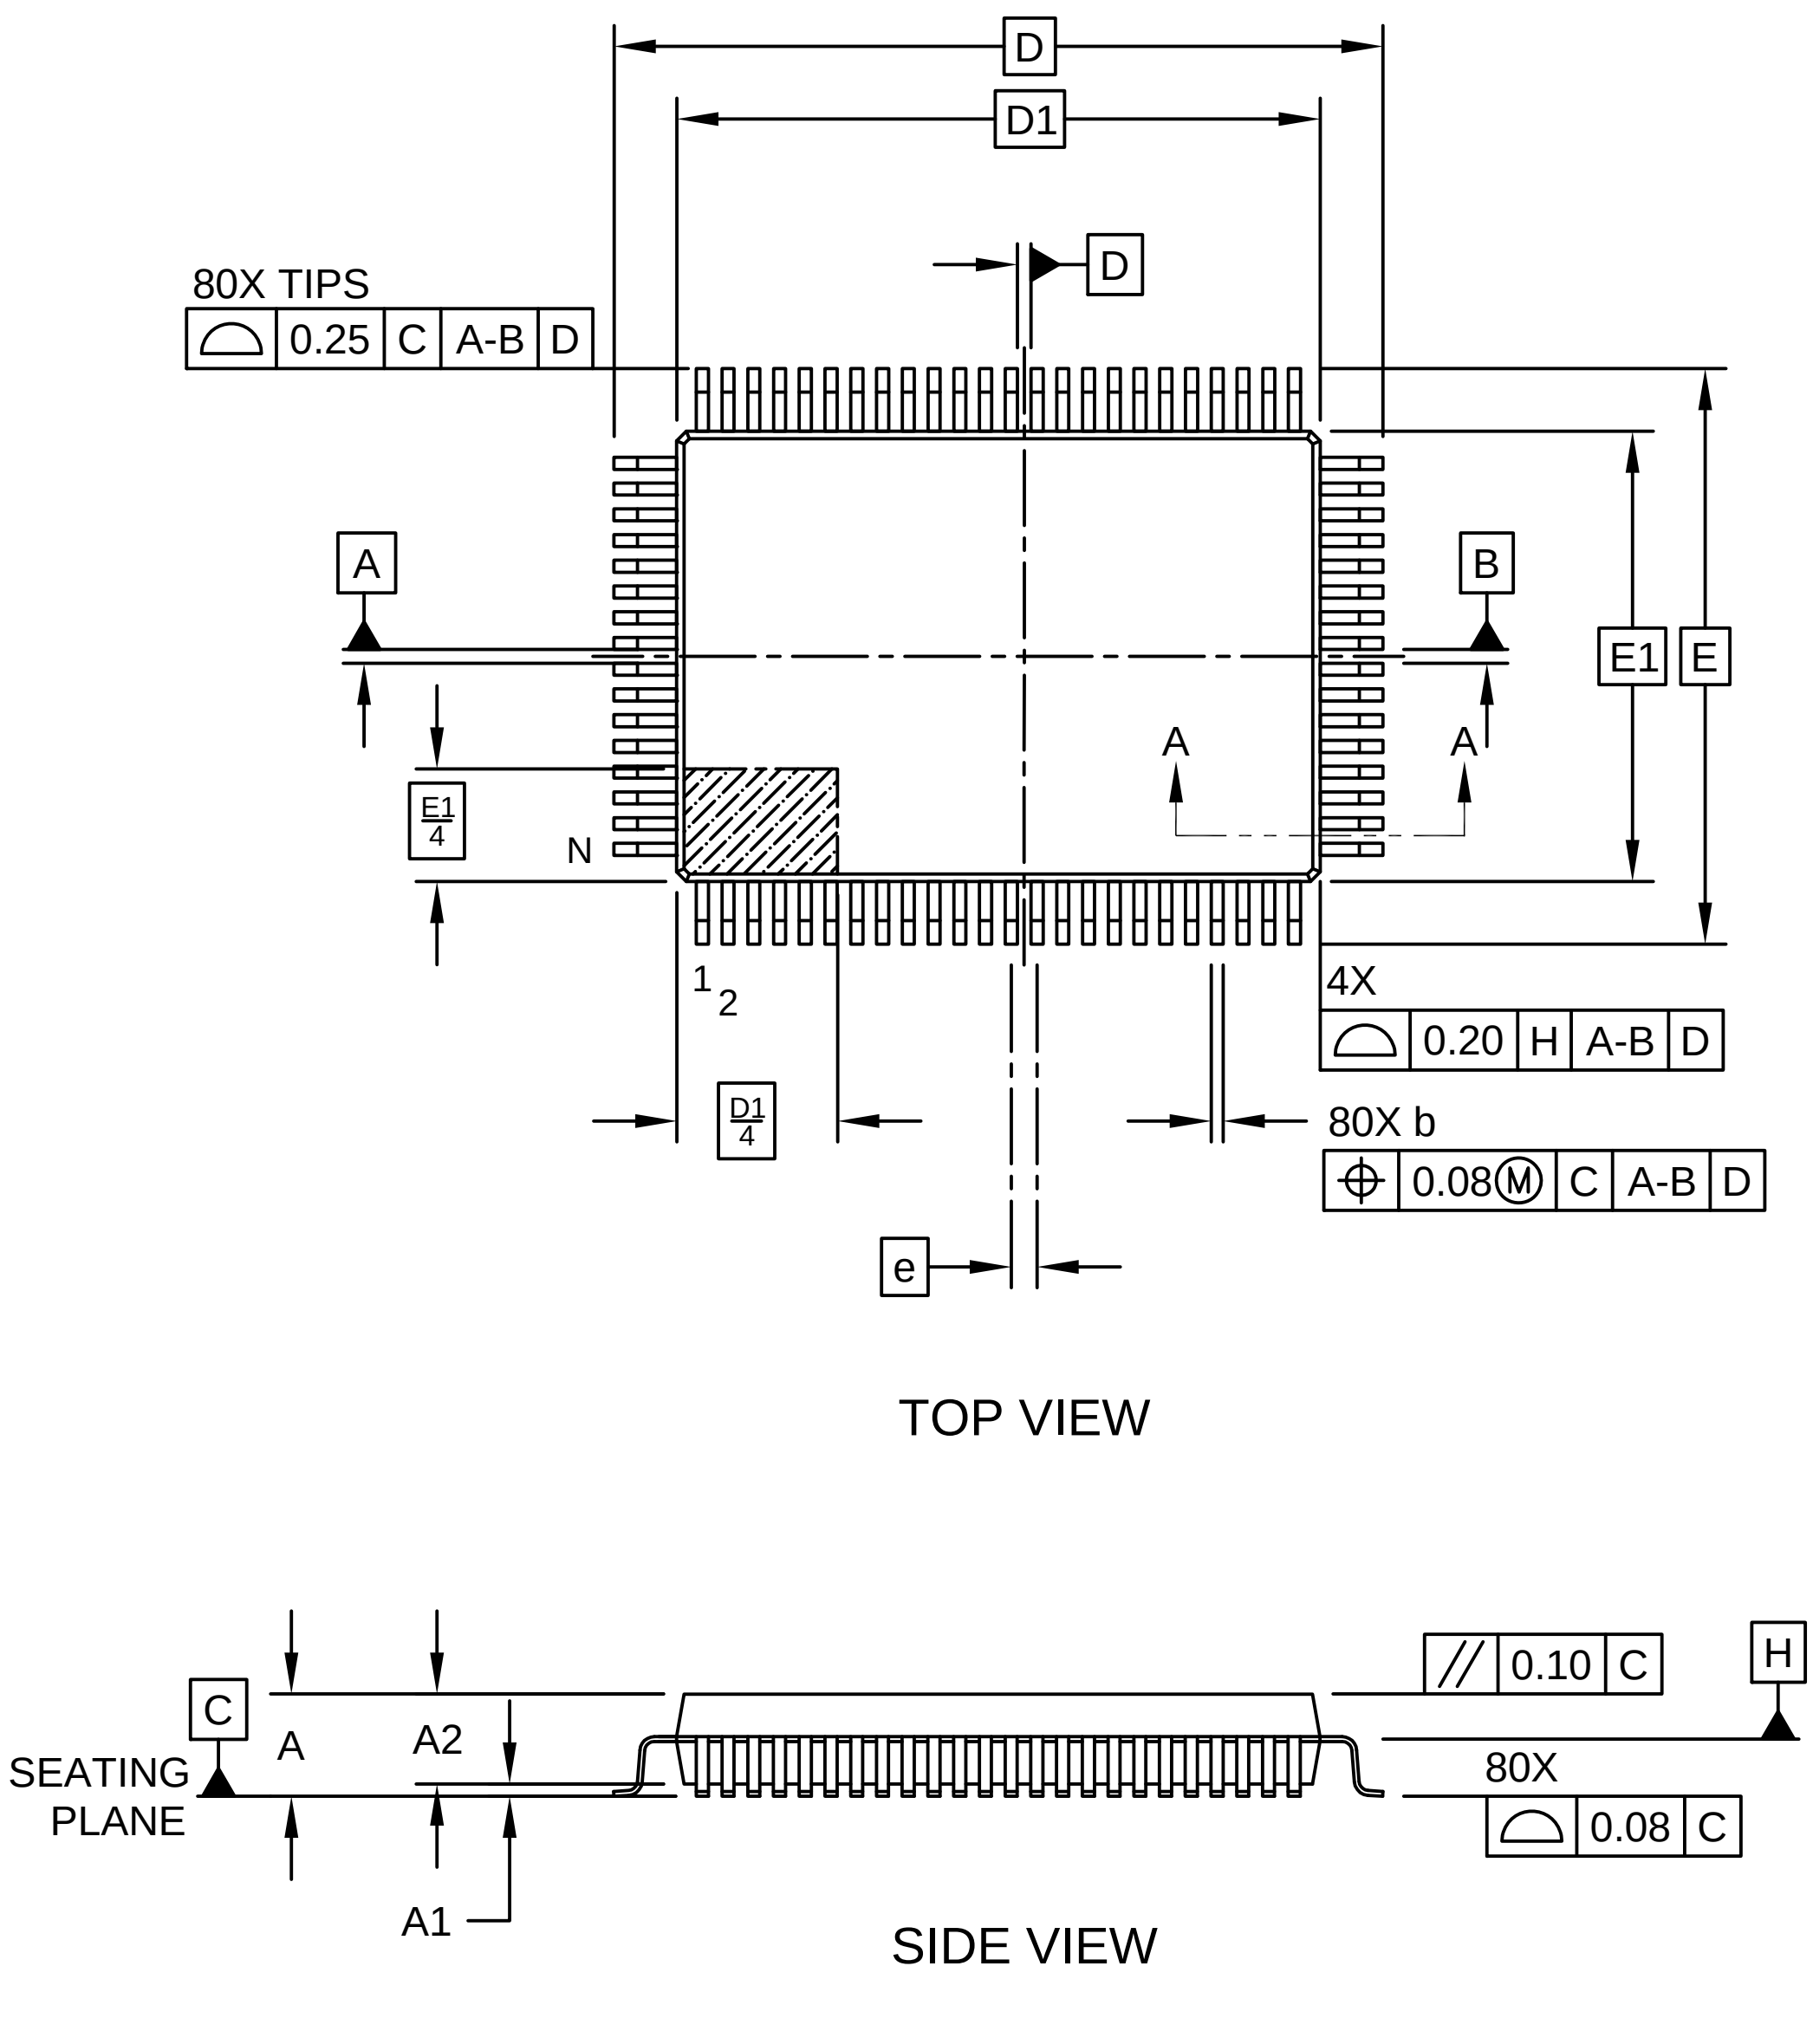

80-Lead Metric Plastic Quad Flat Pack (U7) - 20x14 mm Body [PQFP]
Supertex Legacy Package

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

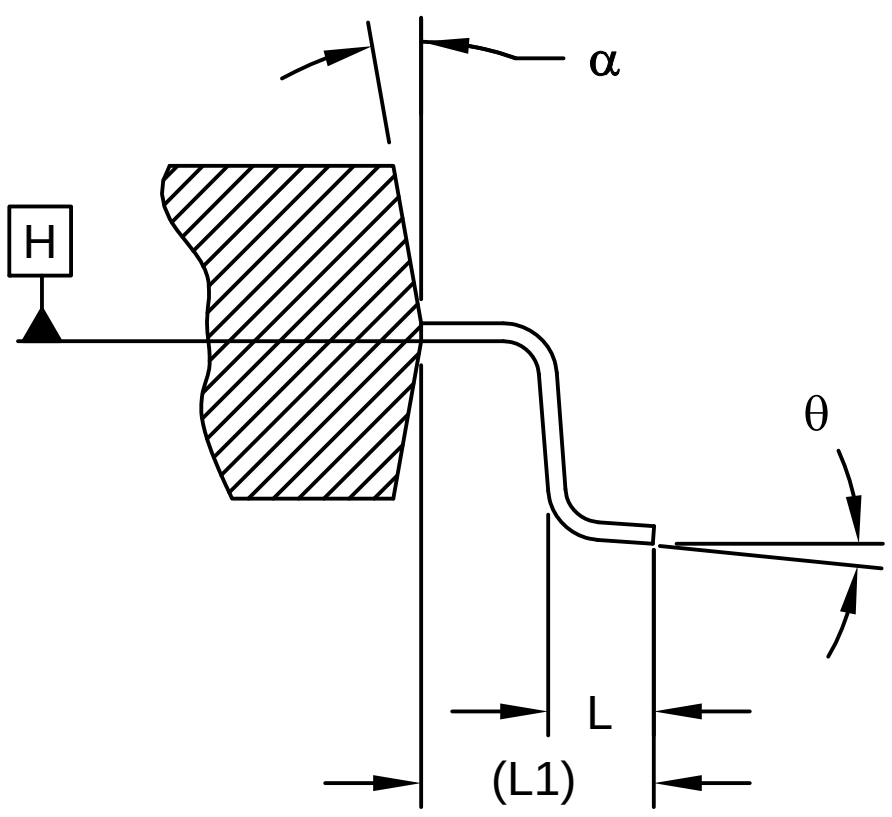

SECTION A-A

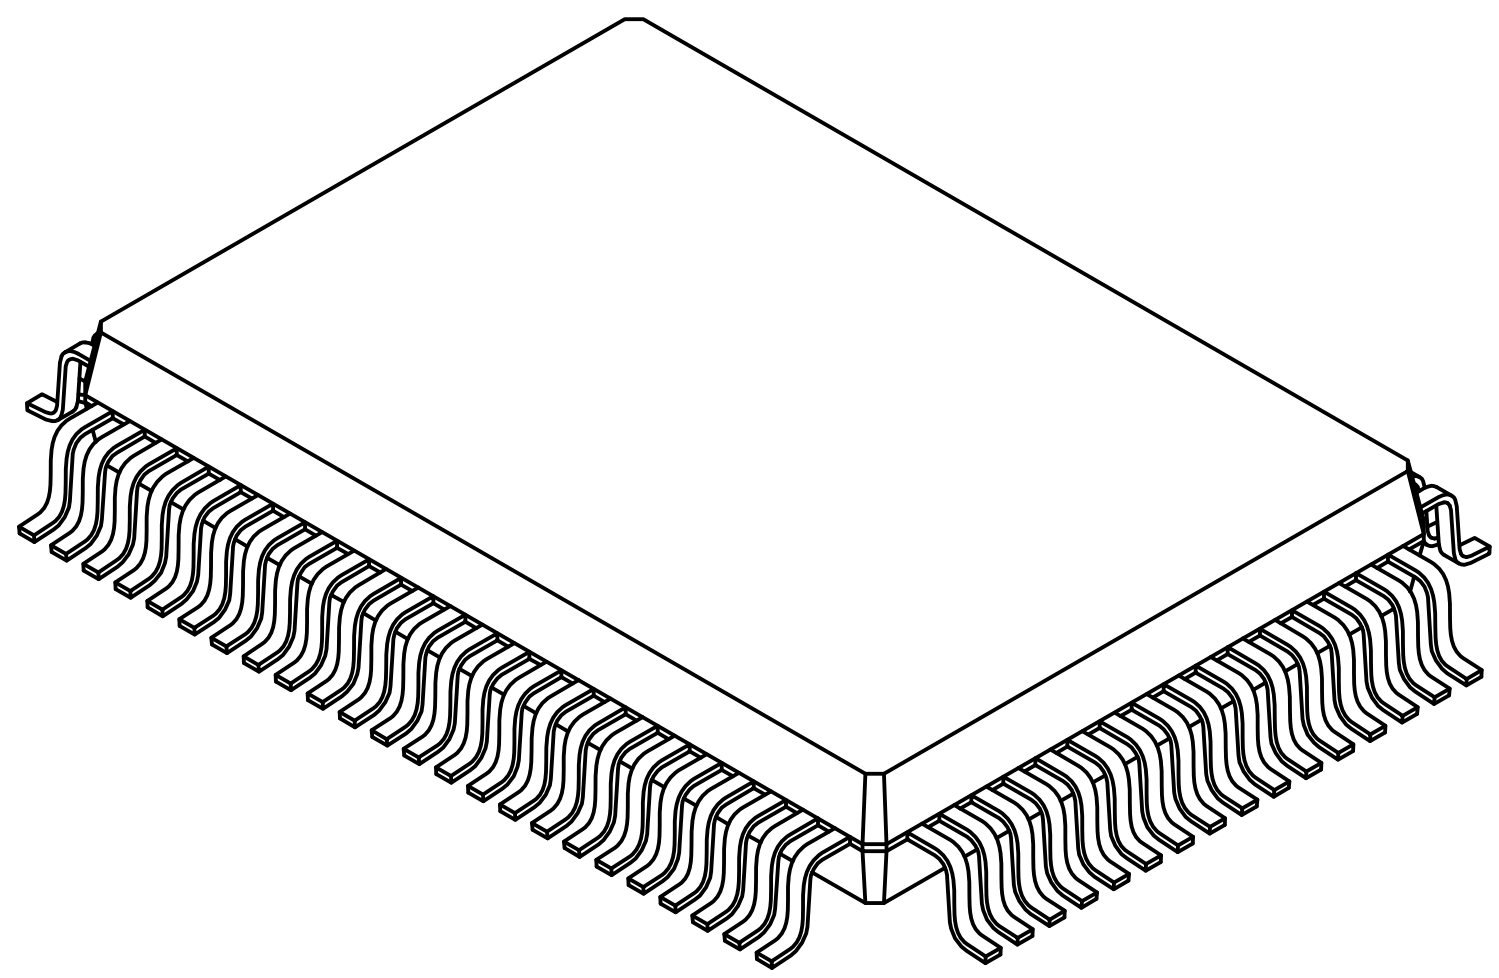

		Units	MILLIMETERS		
		Dimension Limits	MIN	NOM	MAX
Number of Leads	N		80		
Lead Pitch	e		0.80 BSC		
Overall Height	A		2.80	-	3.40
Standoff	A1		0.25	-	0.50
Molded Package Thickness	A2		2.55	2.80	3.05
Foot Length	L		0.73	0.88	1.03
Footprint	L1		1.95 REF		
Foot Angle	θ		0°	3.5°	7°
Overall Width	E		17.90 BSC		
Overall Length	D		23.90 BSC		
Molded Package Width	E1		14.00 BSC		
Molded Package Length	D1		20.00 BSC		
Lead Width	b		0.30	-	0.45
Mold Draft Angle Top	α		5°	-	16°

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M

    BSC: Basic Dimension. Theoretically exact value shown without tolerances.

    REF: Reference Dimension, usually without tolerance, for information purposes only.

80-Lead Metric Plastic Quad Flat Pack (U7) - 20x14 mm Body [PQFP]
Supertex Legacy Package

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

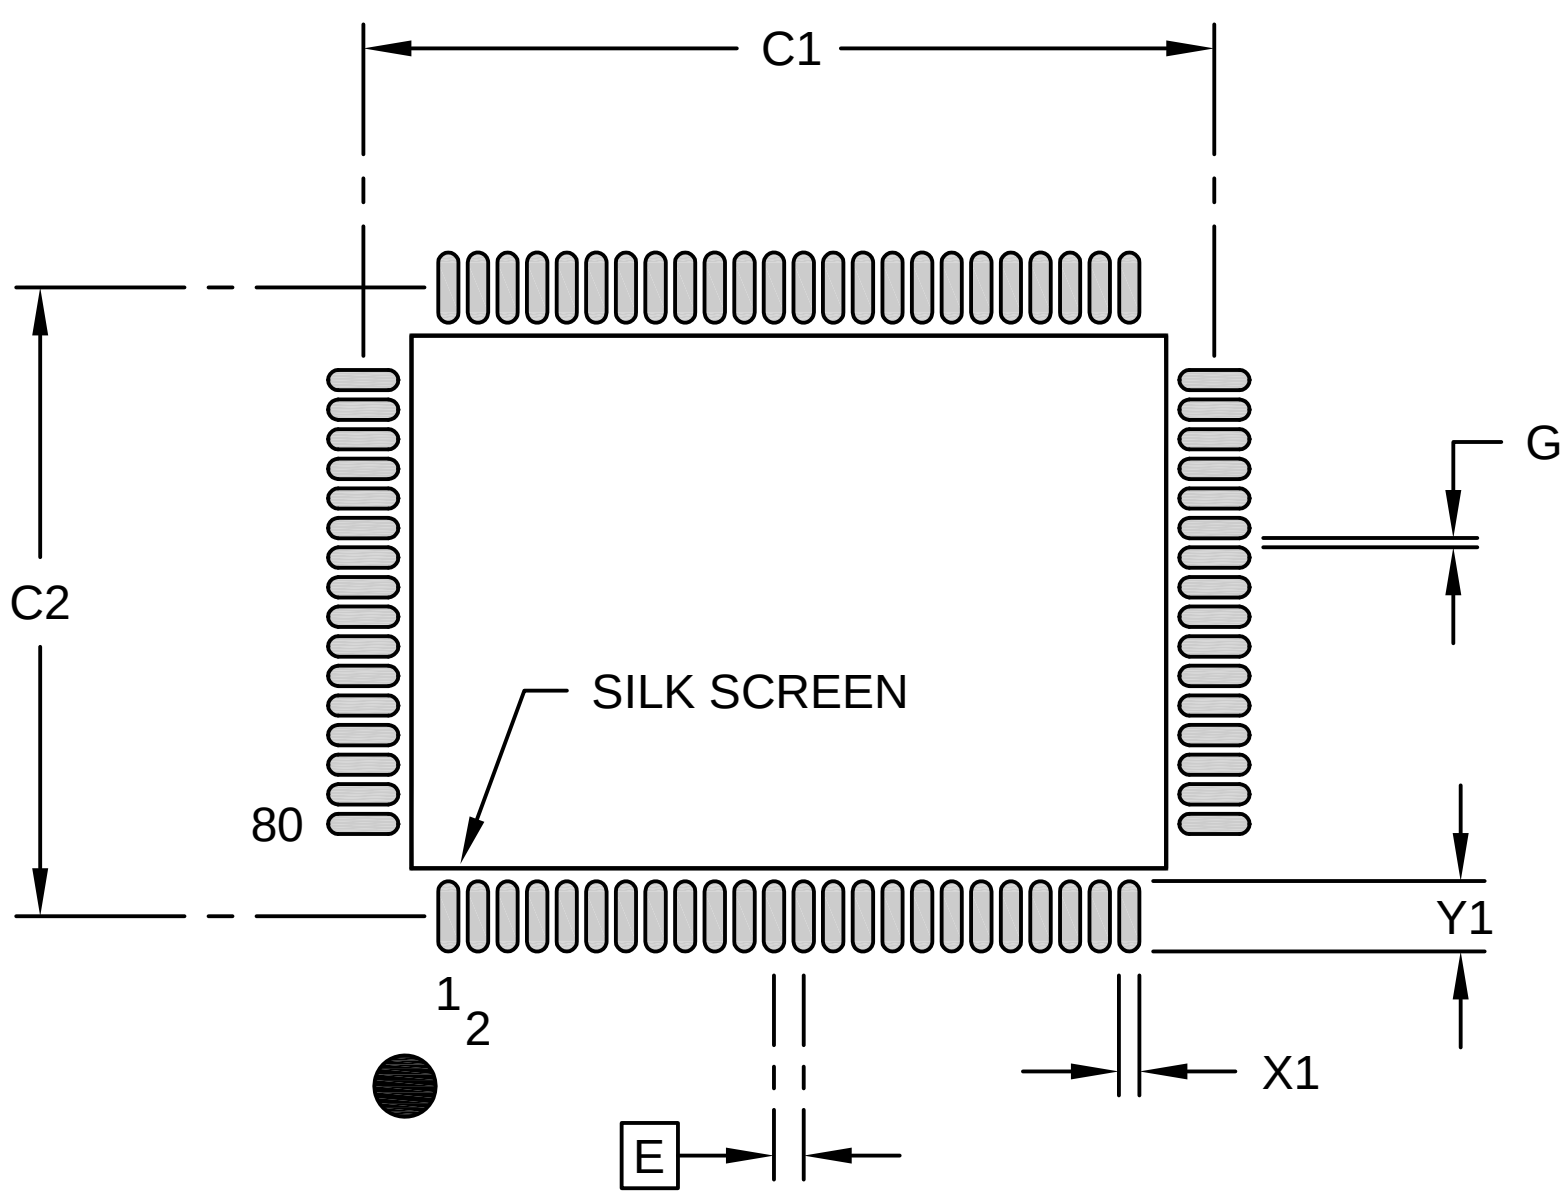

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		23.00	
Contact Pad Spacing	C2		17.00	
Contact Pad Width (X80)	X1			0.55
Contact Pad Length (X80)	Y1			1.90
Contact Pad to Center Pad (X76)	G1	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2280A