10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HMA) - 2.5x2.5x0.6 mm Body [UDFN] With 2.10x1.50 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

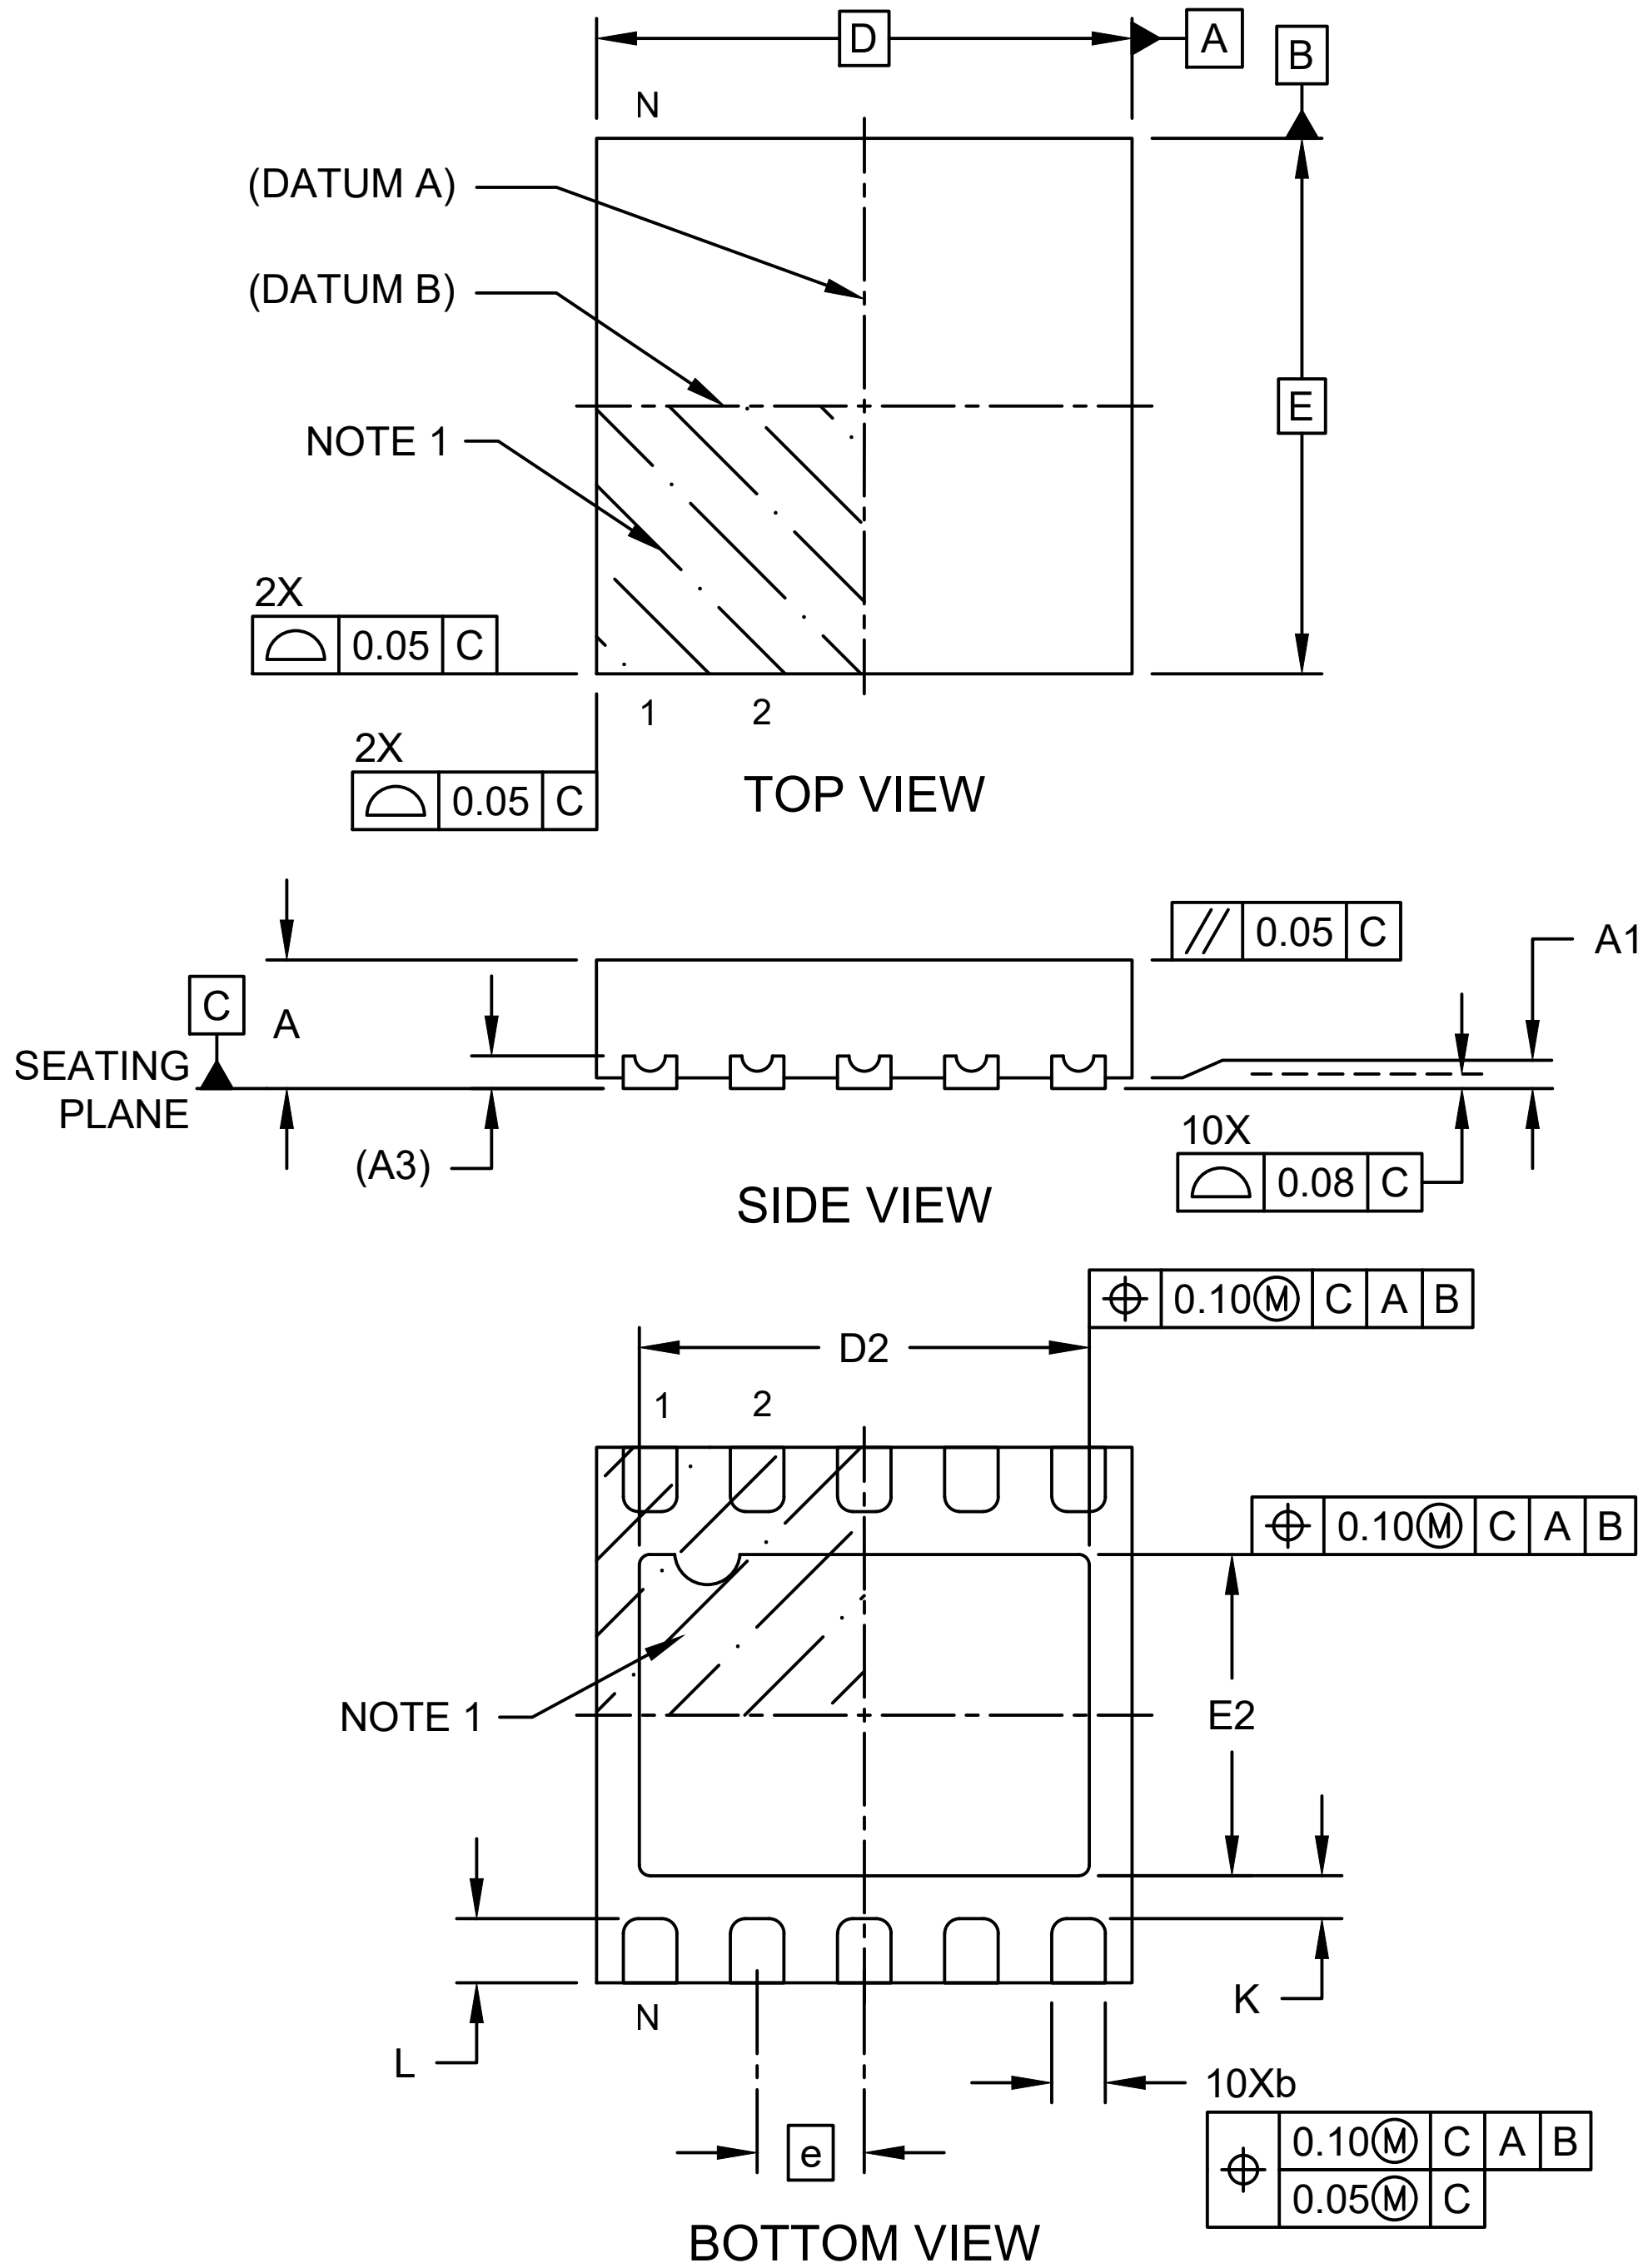

Microchip Technology Drawing C04-01161-HMA Rev B Sheet 1 of 2

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HMA) - 2.5x2.5x0.6 mm Body [UDFN] With 2.10x1.50 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

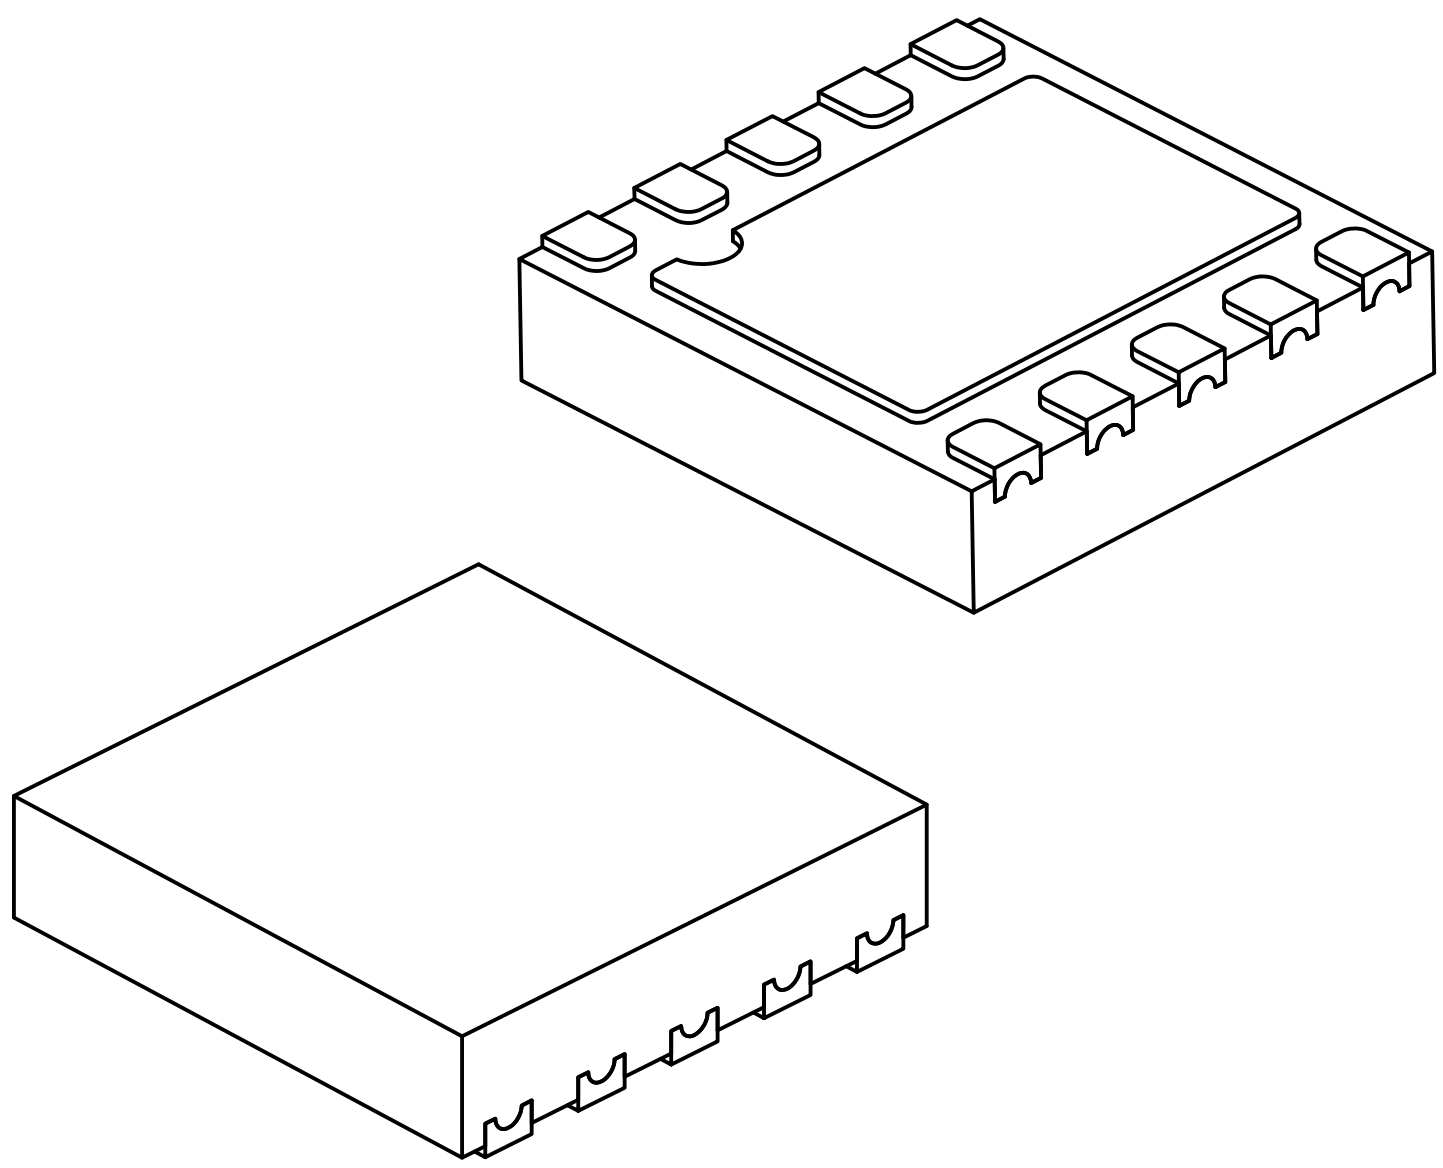

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N		10	
Pitch	e		0.50 BSC	
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.152 REF	
Overall Length	D		2.50 BSC	
Exposed Pad Length	D2	2.05	2.10	2.15
Overall Width	E		2.50 BSC	
Exposed Pad Width	E2	1.45	1.50	1.55
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.25	0.30	0.35
Terminal-to-Exposed-Pad	K	0.20	–	–

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerances, for information purposes only.

Microchip Technology Drawing C04-01161-HMA Rev B Sheet 2 of 2

Land Pattern

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HMA) - 2.5x2.5x0.6 mm Body [UDFN] With 2.10x1.50 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

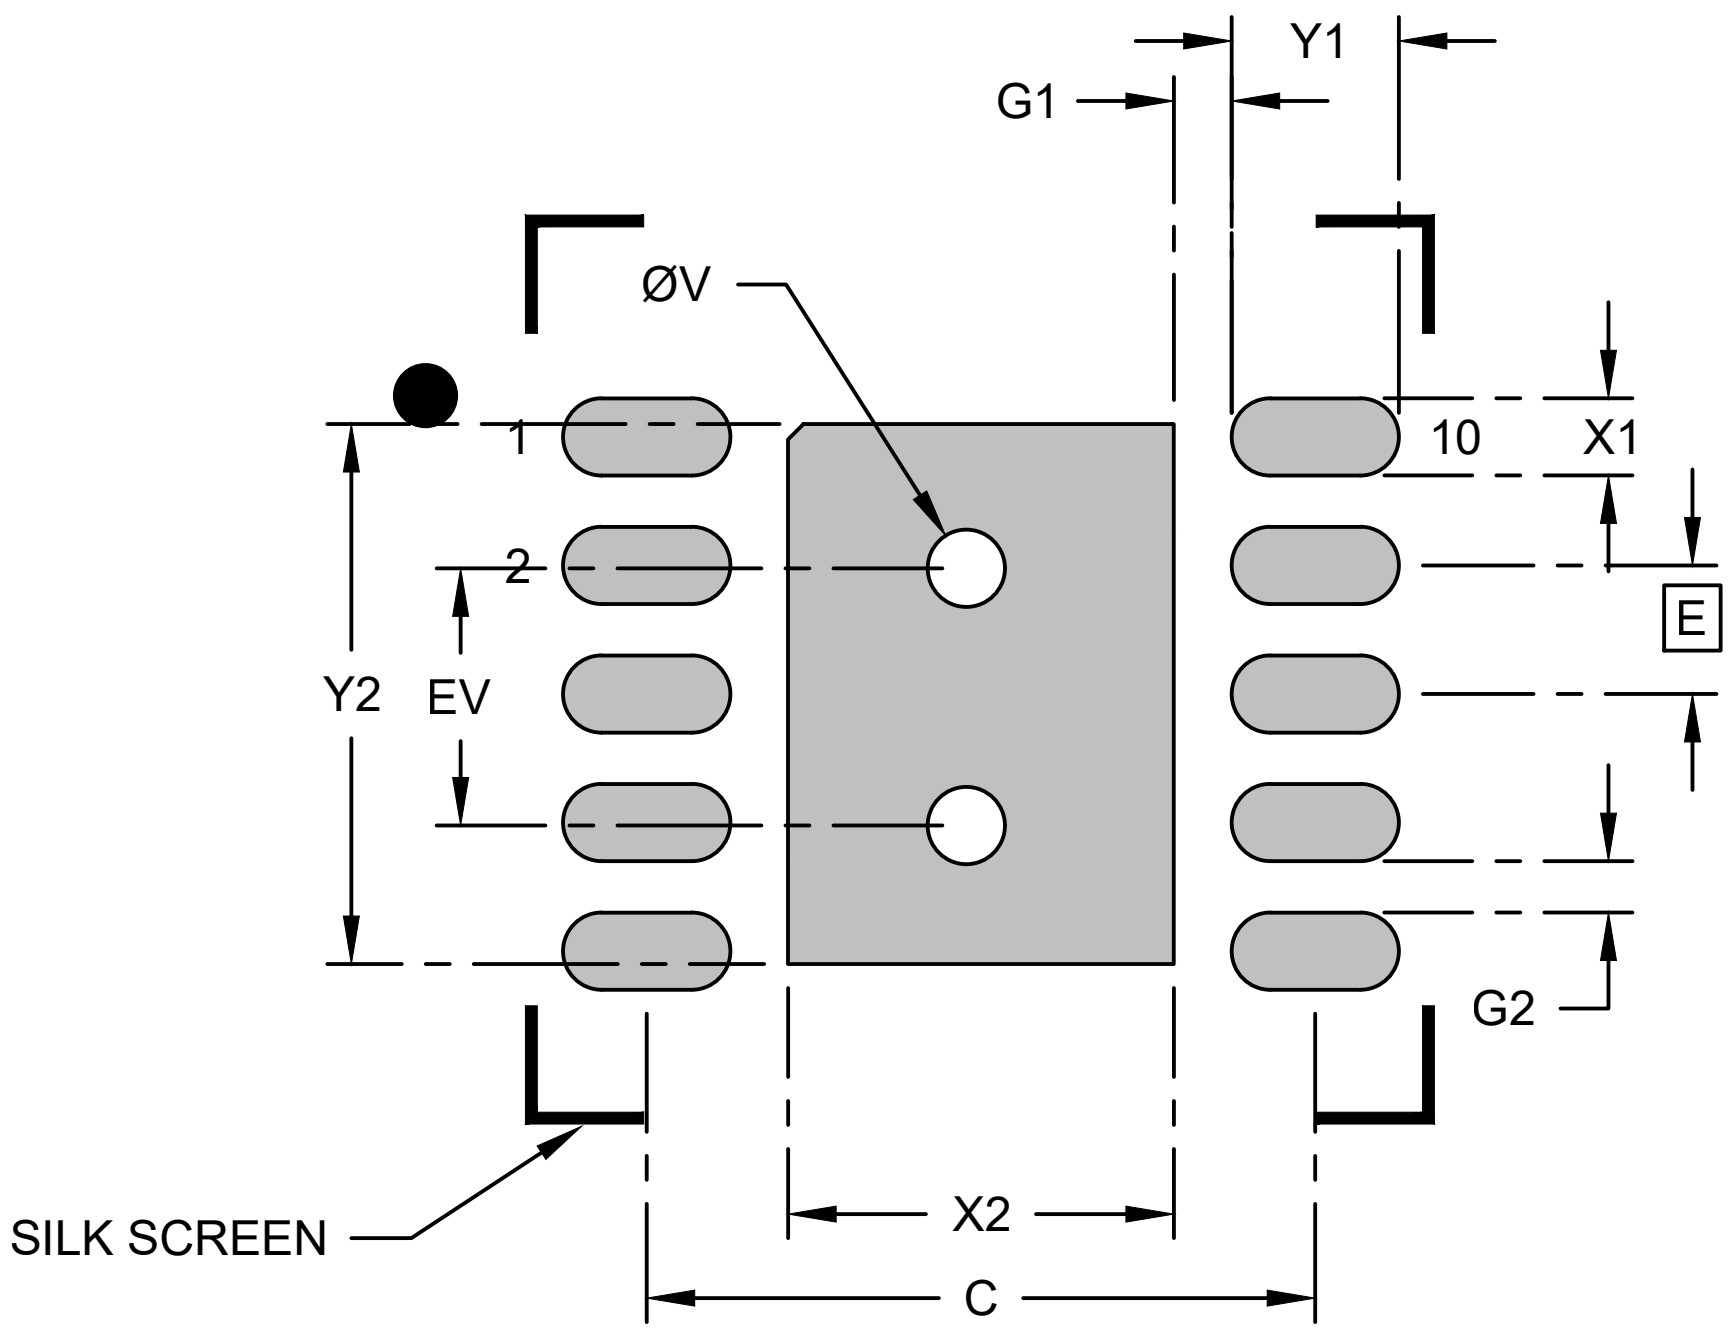

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Center Pad Width	X2			1.50
Center Pad Length	Y2			2.10
Contact Pad Spacing	C1		2.60	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.65
Contact Pad to Center Pad (X10)	G1	0.23		
Contact Pad to Contact Pad (X8)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-03161-HMA Rev B

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HNA) - 2.5x2.5x0.6 mm Body [UDFN] With 2.10x1.50 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

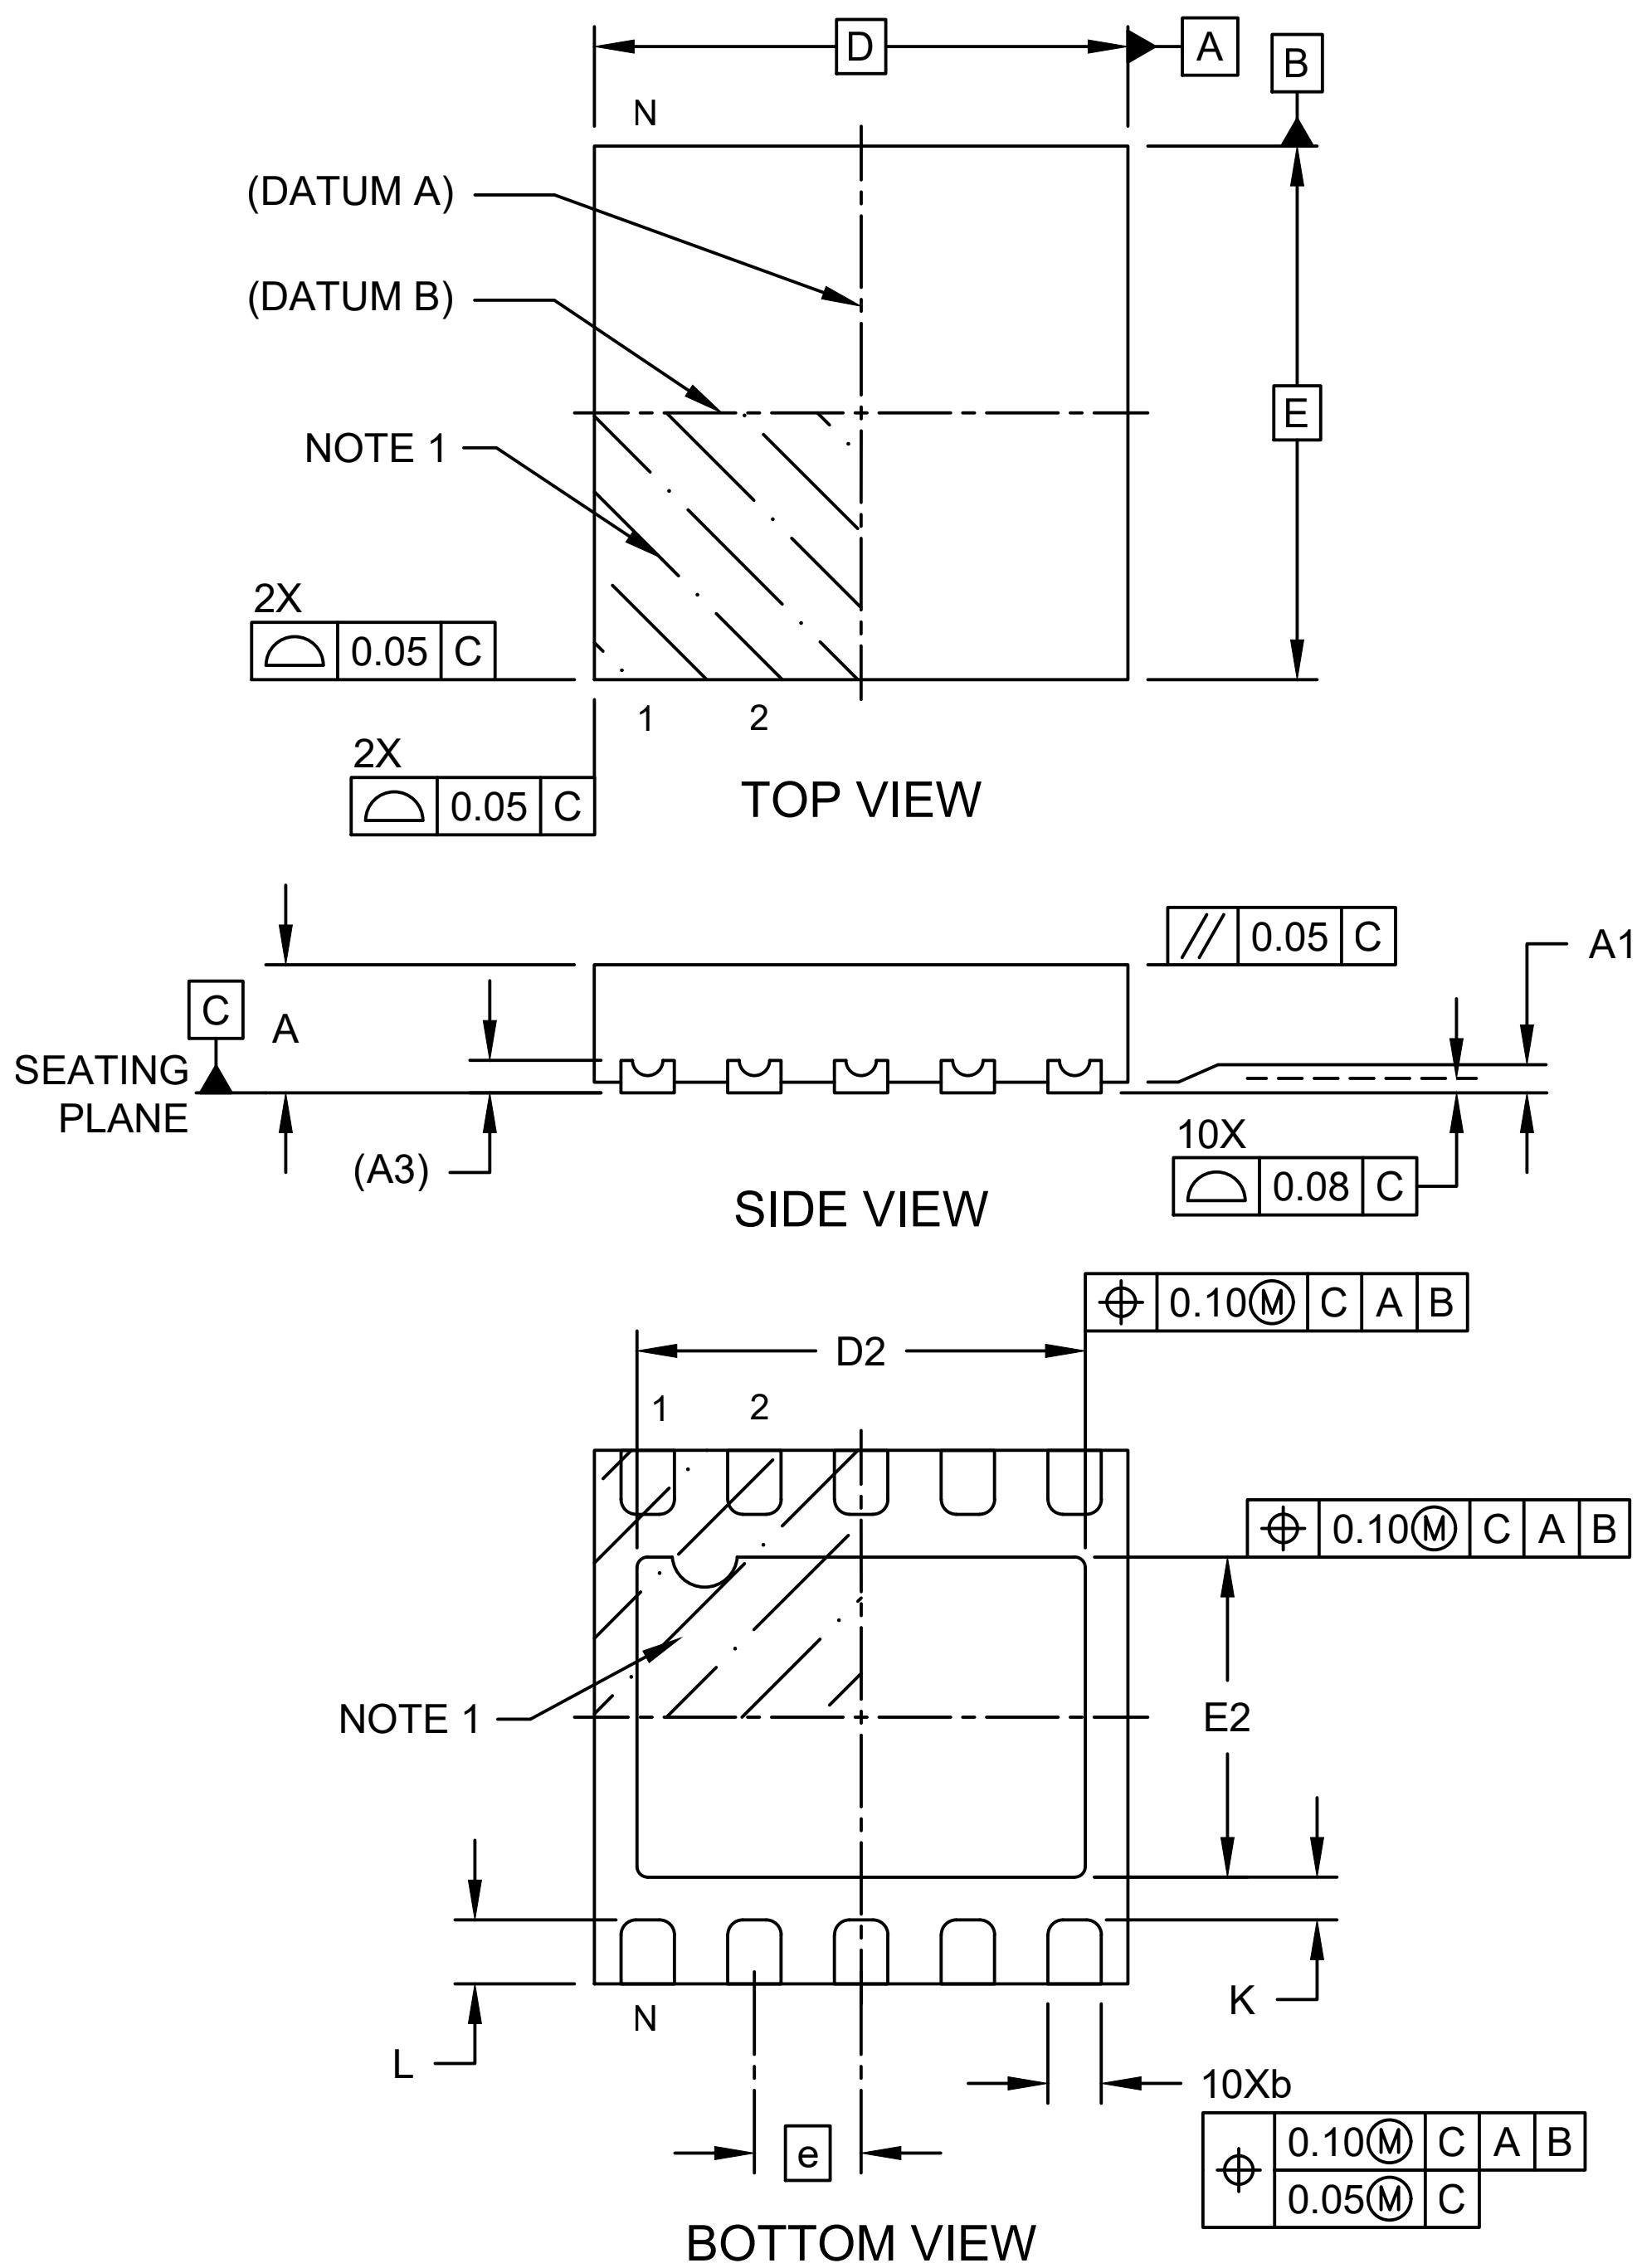

Microchip Technology Drawing C04-01161-HNA Rev B Sheet 1 of 2

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HNA) - 2.5x2.5x0.6 mm Body [UDFN] With 2.10x1.50 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

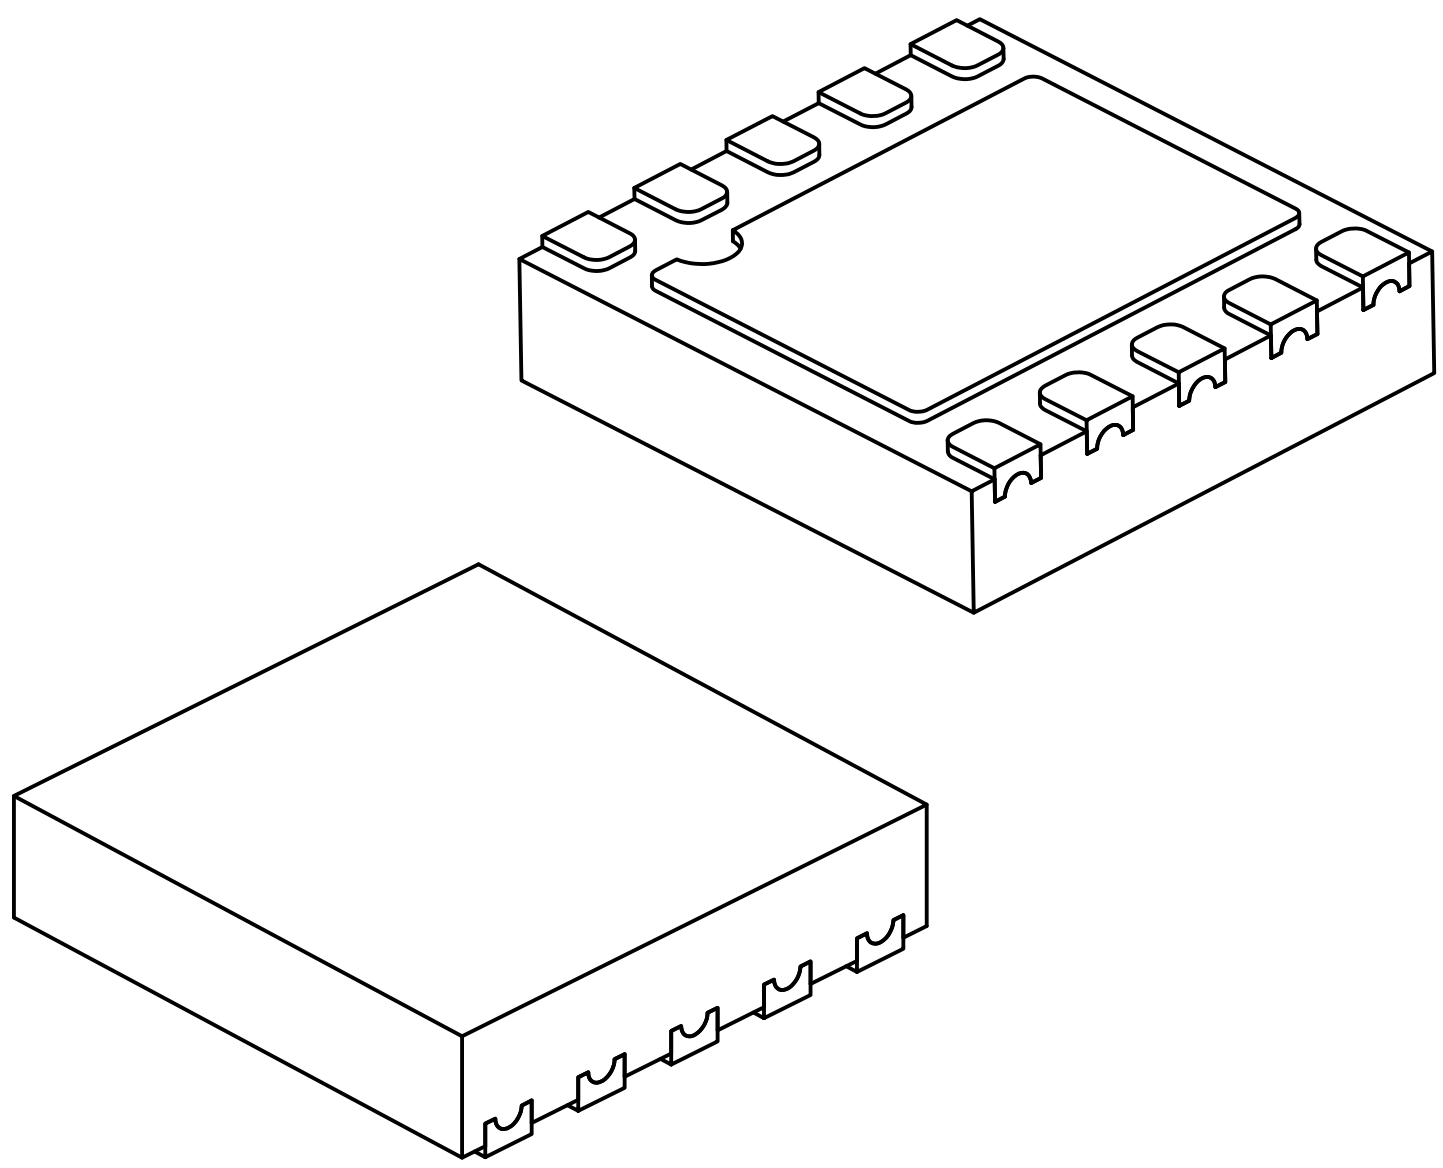

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Number of Terminals	N		10	
Pitch	e		0.50 BSC	
Overall Height	A	0.50	0.55	0.60
Standoff	A1	0.00	0.02	0.05
Terminal Thickness	A3		0.152 REF	
Overall Length	D		2.50 BSC	
Exposed Pad Length	D2	2.05	2.10	2.15
Overall Width	E		2.50 BSC	
Exposed Pad Width	E2	1.45	1.50	1.55
Terminal Width	b	0.20	0.25	0.30
Terminal Length	L	0.25	0.30	0.35
Terminal-to-Exposed-Pad	K	0.20	–	–

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. The package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerances, for information purposes only.

Microchip Technology Drawing C04-01161-HNA Rev B Sheet 2 of 2

10-Lead Ultra Thin Plastic Dual Flat, No Lead Package (HNA) - 2.5x2.5x0.6 mm Body [UDFN] With 2.10x1.50 mm Exposed Pad

Note:	For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

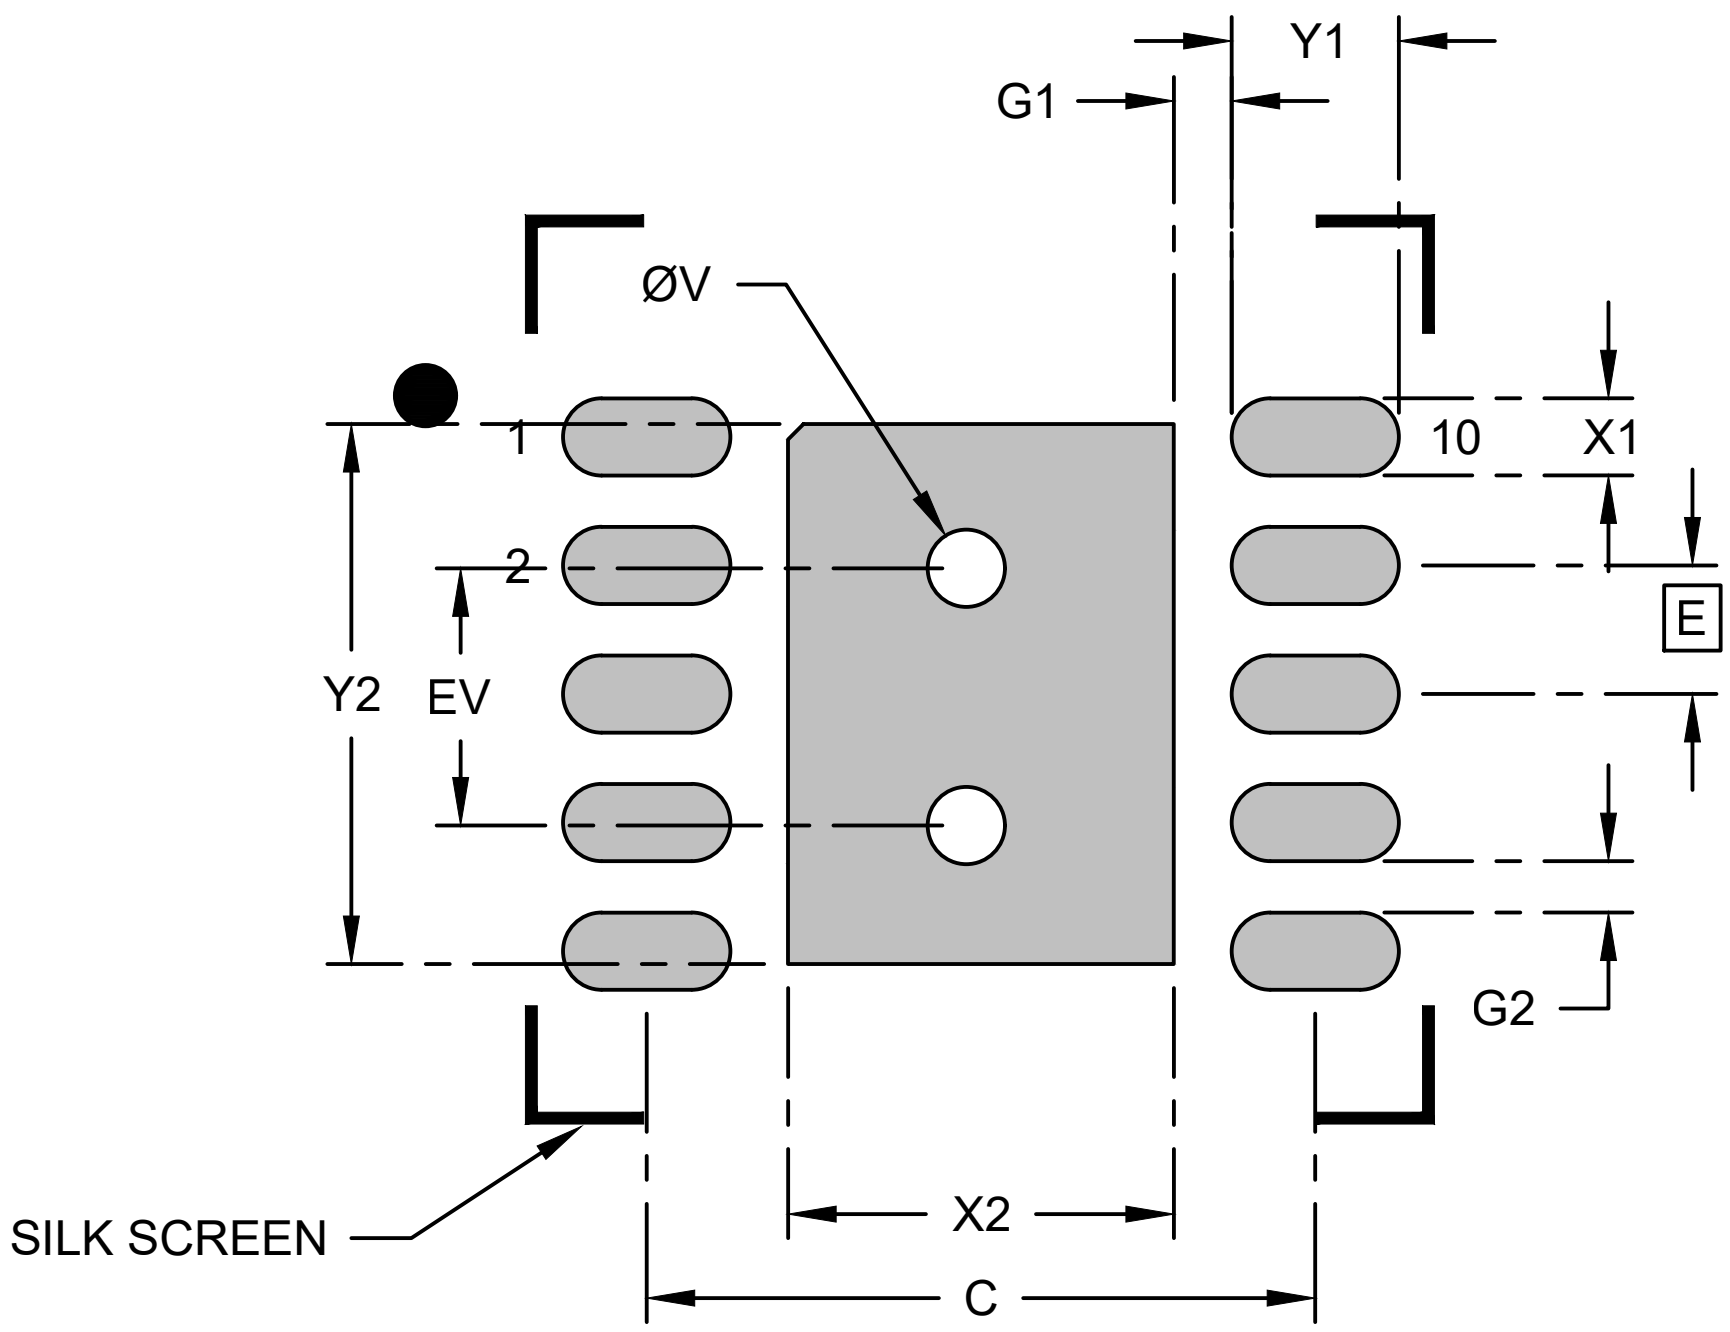

RECOMMENDED LAND PATTERN

	Units	MILLIMETERS		
	Dimension Limits	MIN	NOM	MAX
Contact Pitch	E		0.50 BSC	
Center Pad Width	X2			1.50
Center Pad Length	Y2			2.10
Contact Pad Spacing	C1		2.60	
Contact Pad Width (Xnn)	X1			0.30
Contact Pad Length (Xnn)	Y1			0.65
Contact Pad to Center Pad (X10)	G1	0.23		
Contact Pad to Contact Pad (X8)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.00	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during the reflow process.

Microchip Technology Drawing C04-03161-HNA Rev B