


40-Lead Ceramic Dual In-Line (JK) ~ .600" Body [CERDIP]

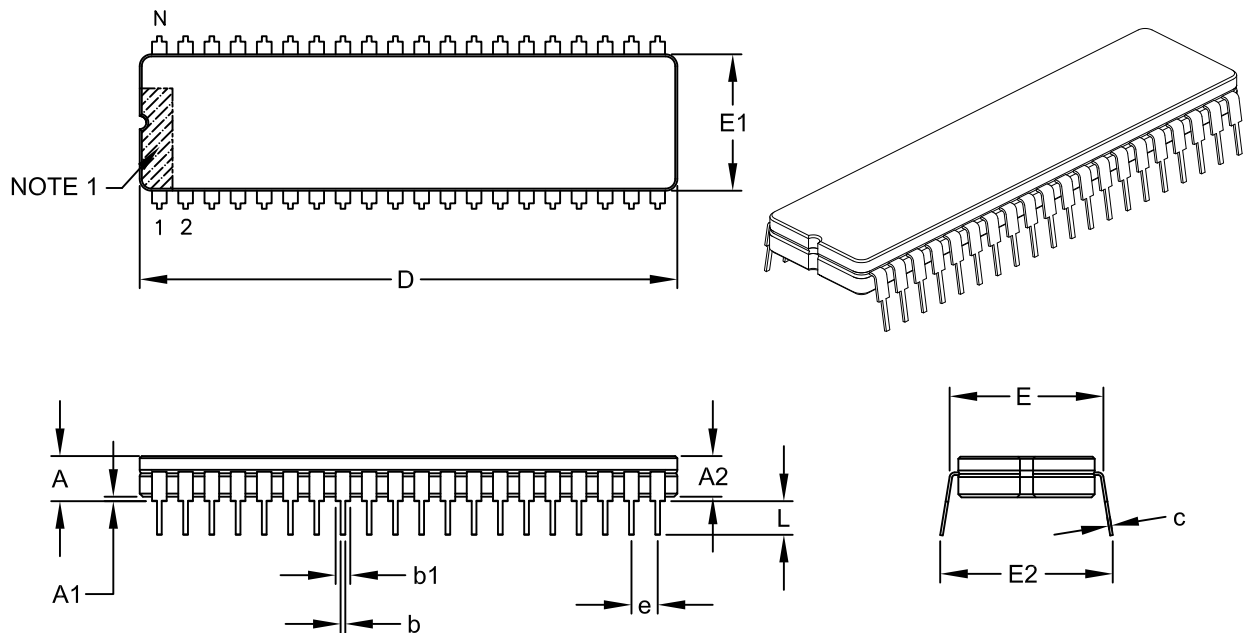

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	40		
Pitch	e	.100 BSC		
Top to Seating Plane	A	-	-	.225
Ceramic Package Height	A2	.140	-	.175
Base to Seating Plane §	A1	.015	-	-
Shoulder to Shoulder Width	E	.590	-	.625
Ceramic Package Width	E1	.510	.520	.540
Overall Length	D	2.030	2.050	2.070
Tip to Seating Plane	L	.125	-	.200
Lead Thickness	c	.008	-	.015
Upper Lead Width	b1	.045	-	.065
Lower Lead Width	b	.015	-	.023
Overall Row Spacing	E2	.620	-	.710

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.