


18-Lead Ceramic Dual In-Line with Window (JW) ~ .300" Body [CERDIP]

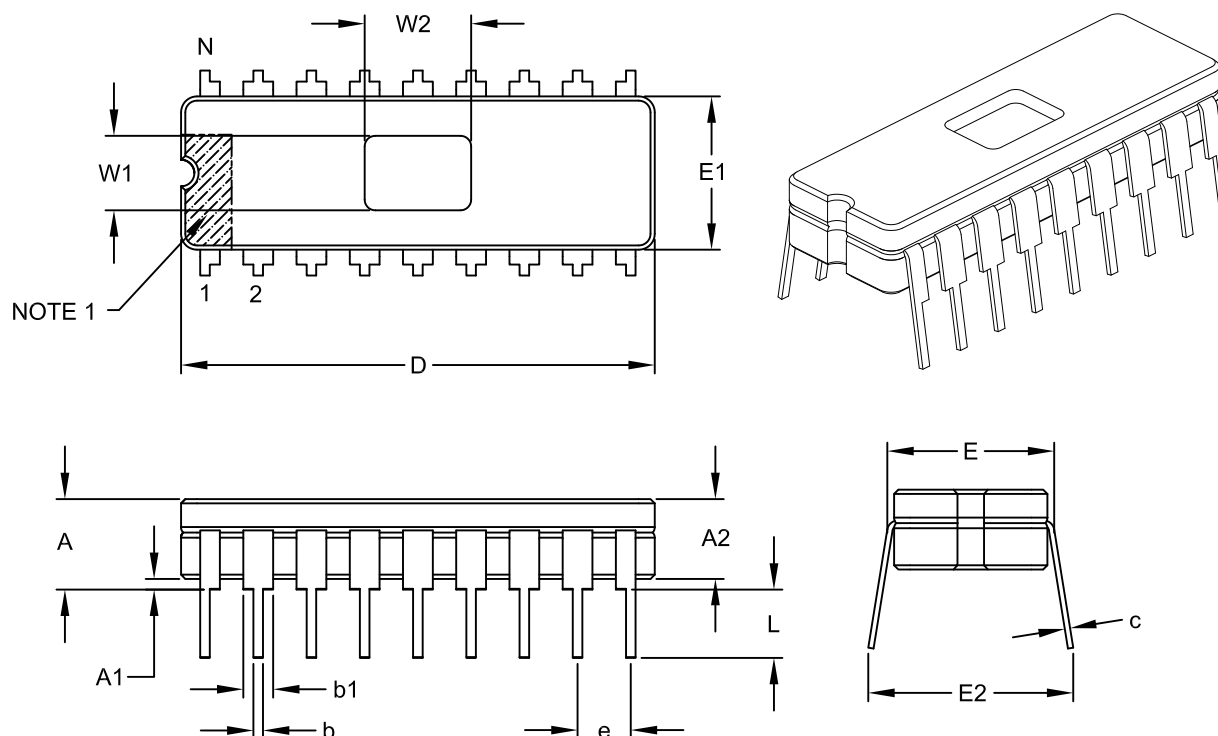

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	18		
Pitch	e	.100 BSC		
Top to Seating Plane	A	-	-	.200
Ceramic Package Height	A2	.140	-	.175
Base to Seating Plane §	A1	.015	-	-
Shoulder to Shoulder Width	E	.308	-	.325
Ceramic Pkg. Width	E1	.280	.288	.296
Overall Length	D	.882	.890	.910
Tip to Seating Plane	L	.125	-	.200
Lead Thickness	c	.008	-	.014
Upper Lead Width	b1	.045	-	.065
Lower Lead Width	b	.015	-	.023
Overall Row Spacing	E2	.325	-	.410
Window Width	W1	.130	.140	.150
Window Length	W2	.190	.200	.210

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.