


5-Lead Plastic Double Deca-Watt Package (ET) [DDPAK]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

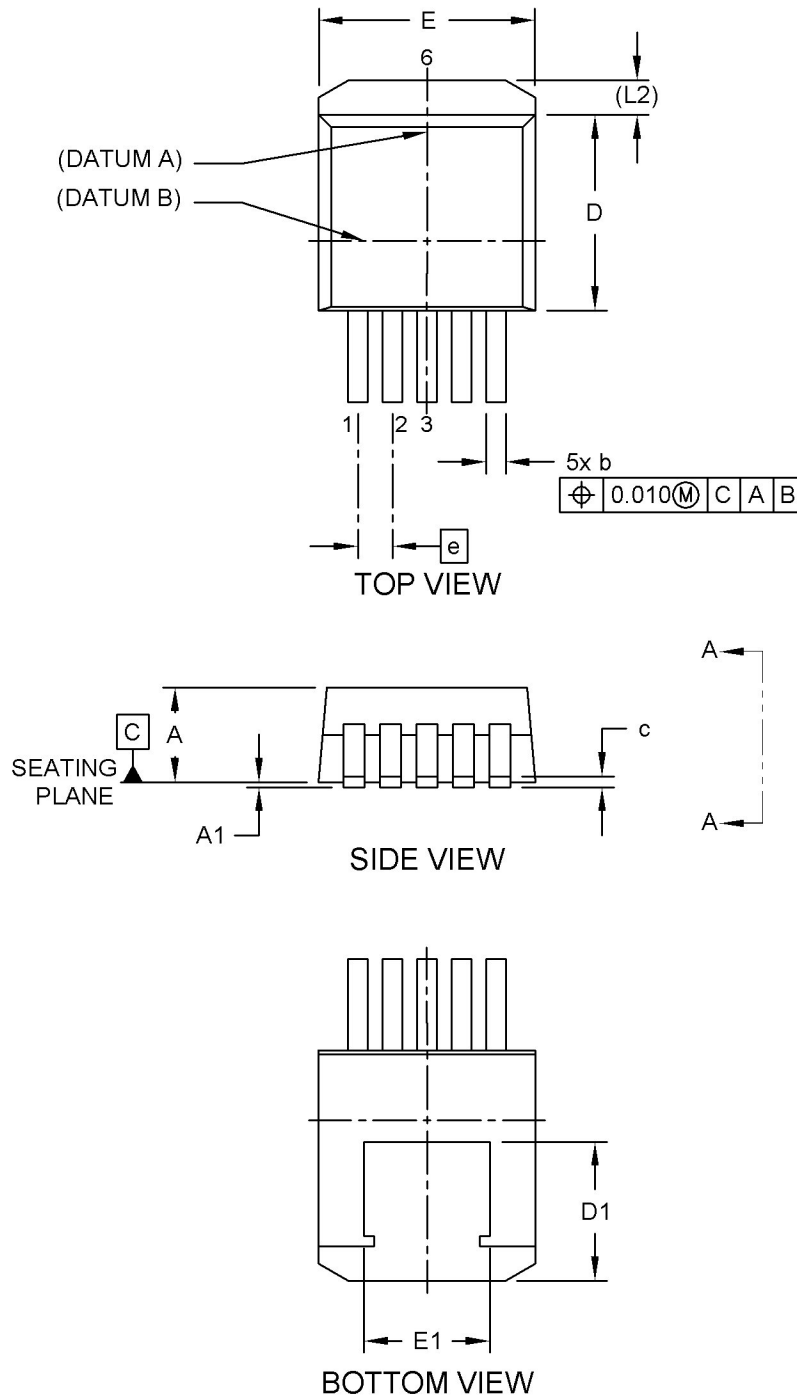

Microchip Technology Drawing C04-012-ET Rev D Sheet 1 of 2

5-Lead Plastic Double Deca-Watt Package (ET) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

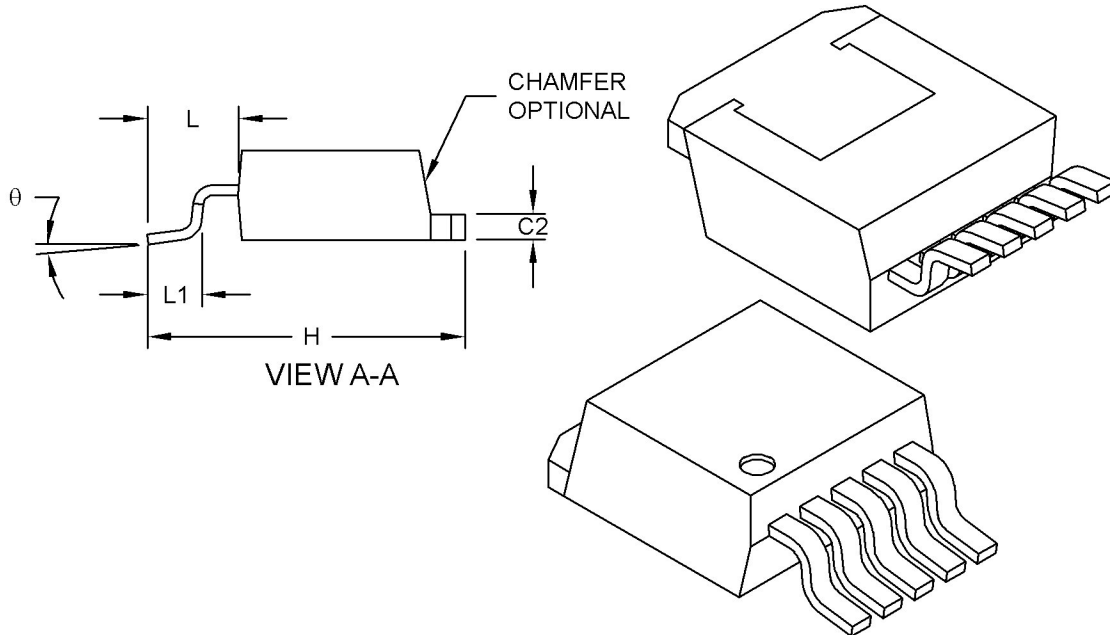

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	5		
Pitch	e	.067 BSC		
Molded Package Thickness	A	.160	-	.190
Standoff	A1	.000	-	.010
Overall Length	H	.575	-	.625
Overall Width	E	.380	-	.420
Thermal Tab Width	E1	.245	-	-
Molded Package Length	D	.330	-	.380
Thermal Tab Length	D1	.270	-	-
Lead Thickness	c	.015	-	.029
Lead Width	b	.020	-	.039
Thermal Tab Thickness	C2	.045	-	.065
Lead Length	L	.070	-	.110
Foot Print Length	L1	-	-	.066
Thermal Tab Length	L2	0.13 REF		
Foot Angle	θ	0°	-	8°

Notes:


- § Significant Characteristic
- Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-012-ET Rev D Sheet 2 of 2

5-Lead Plastic Double Deca-Watt Package (ET) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

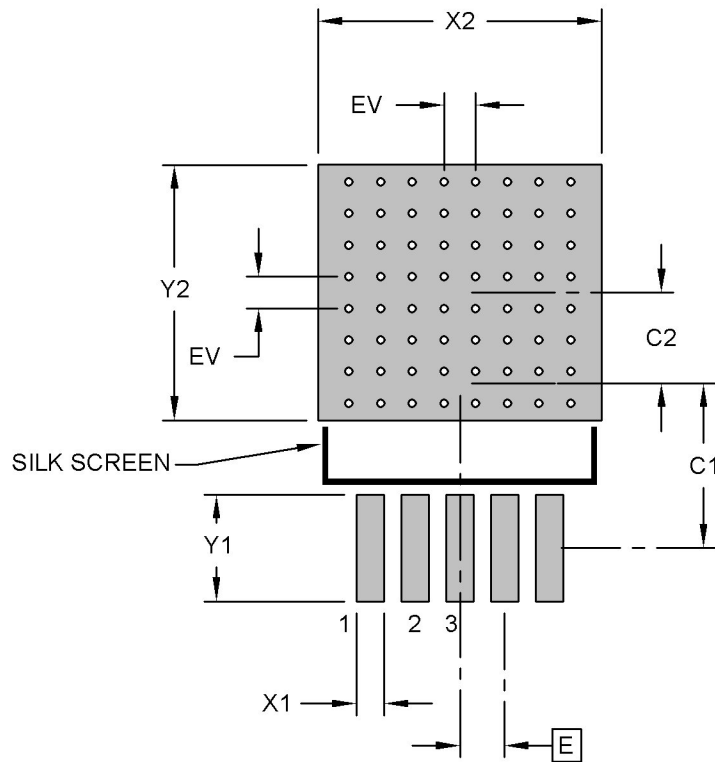

RECOMMENDED LAND PATTERN

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.067 BSC		
Optional Contact Pad Width	X2			.423
Optional Contact Pad Length	Y2			.382
Contact Pad Spacing	C1		.246	
Contact Pad Spacing	C2		.136	
Contact Pad Width (X3)	X1			.041
Contact Pad Length (X3)	Y1			.159
Thermal Via Diameter	V		.013	
Thermal Via Pitch	EV		.047	


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2012-ET Rev D

5-Lead Plastic Double Deca-Watt Package (ETX) [DDPAK]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

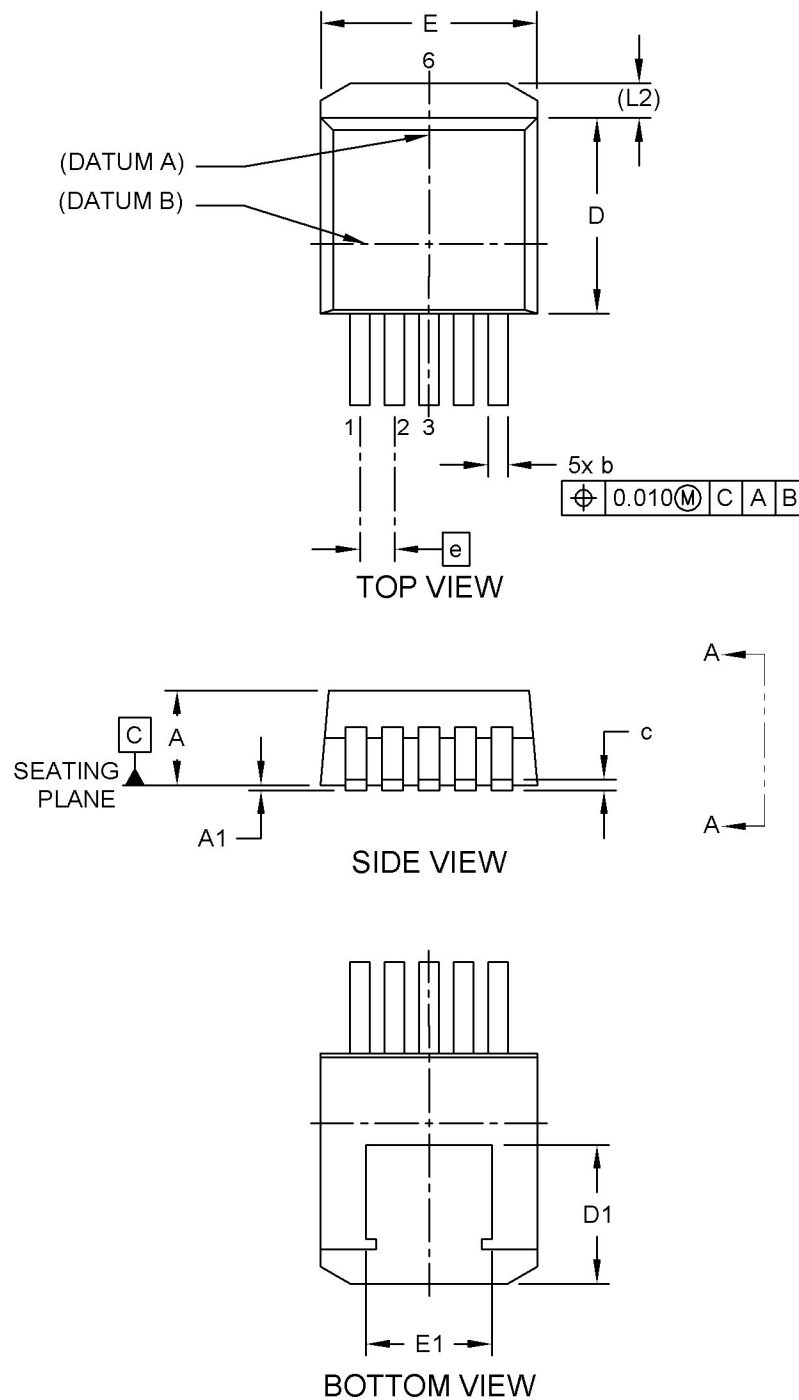

Microchip Technology Drawing C04-012-ETX Rev D Sheet 1 of 2

5-Lead Plastic Double Deca-Watt Package (ETX) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

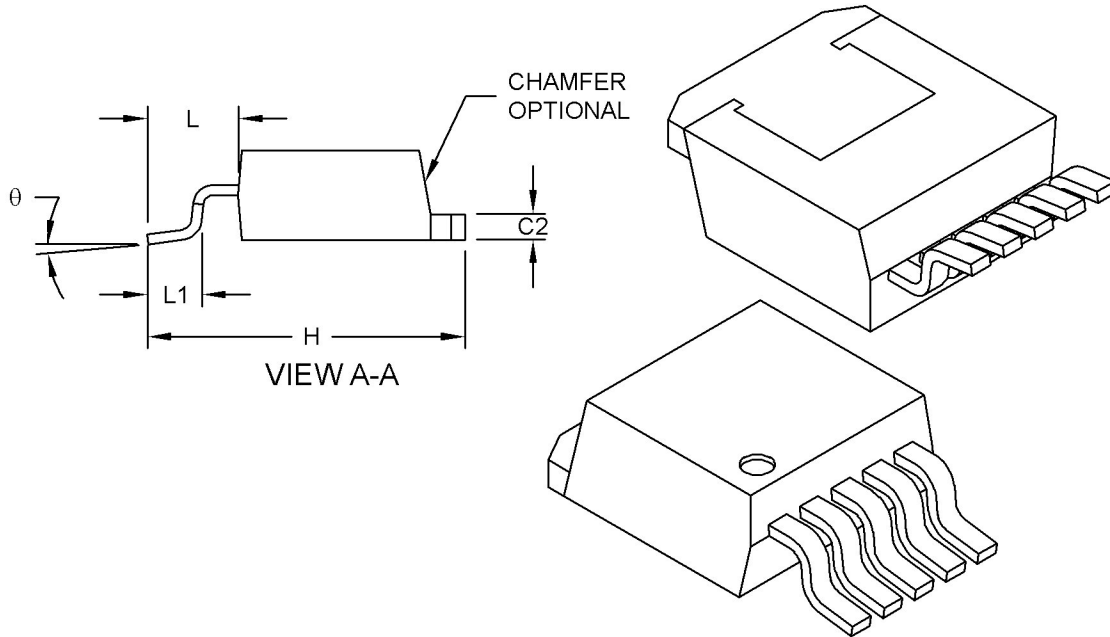

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	5		
Pitch	e	.067 BSC		
Molded Package Thickness	A	.160	-	.190
Standoff	A1	.000	-	.010
Overall Length	H	.575	-	.625
Overall Width	E	.380	-	.420
Thermal Tab Width	E1	.245	-	-
Molded Package Length	D	.330	-	.380
Thermal Tab Length	D1	.270	-	-
Lead Thickness	c	.015	-	.029
Lead Width	b	.020	-	.039
Thermal Tab Thickness	C2	.045	-	.065
Lead Length	L	.070	-	.110
Foot Print Length	L1	-	-	.066
Thermal Tab Length	L2	0.13 REF		
Foot Angle	θ	0°	-	8°


Notes:

- § Significant Characteristic
- Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-012-ETX Rev D Sheet 2 of 2

5-Lead Plastic Double Deca-Watt Package (ETX) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

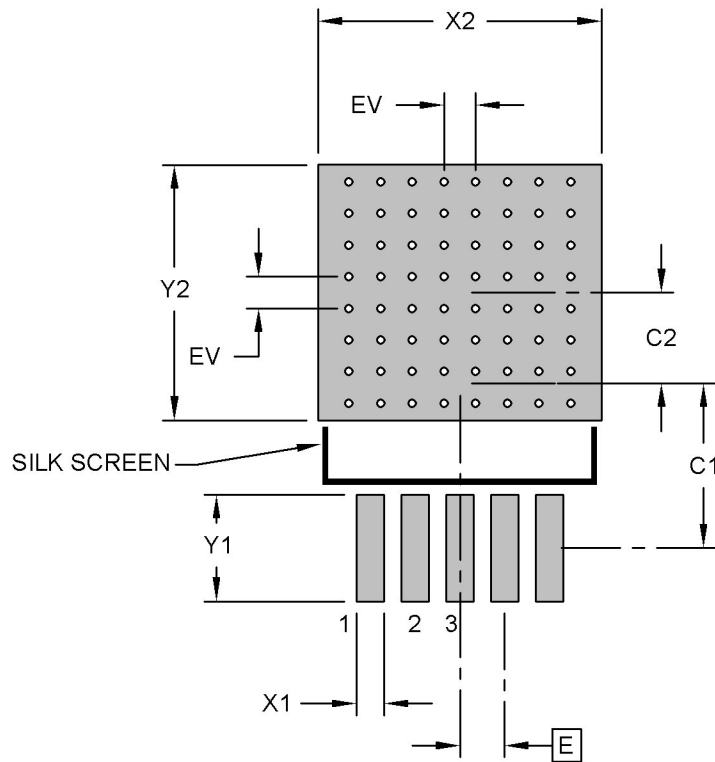

RECOMMENDED LAND PATTERN

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.067 BSC		
Optional Contact Pad Width	X2			.423
Optional Contact Pad Length	Y2			.382
Contact Pad Spacing	C1		.246	
Contact Pad Spacing	C2		.136	
Contact Pad Width (X3)	X1			.041
Contact Pad Length (X3)	Y1			.159
Thermal Via Diameter	V		.013	
Thermal Via Pitch	EV		.047	


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2012-ETX Rev D

5-Lead Plastic Double Deca-Watt Package (J7X) [DDPAK]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

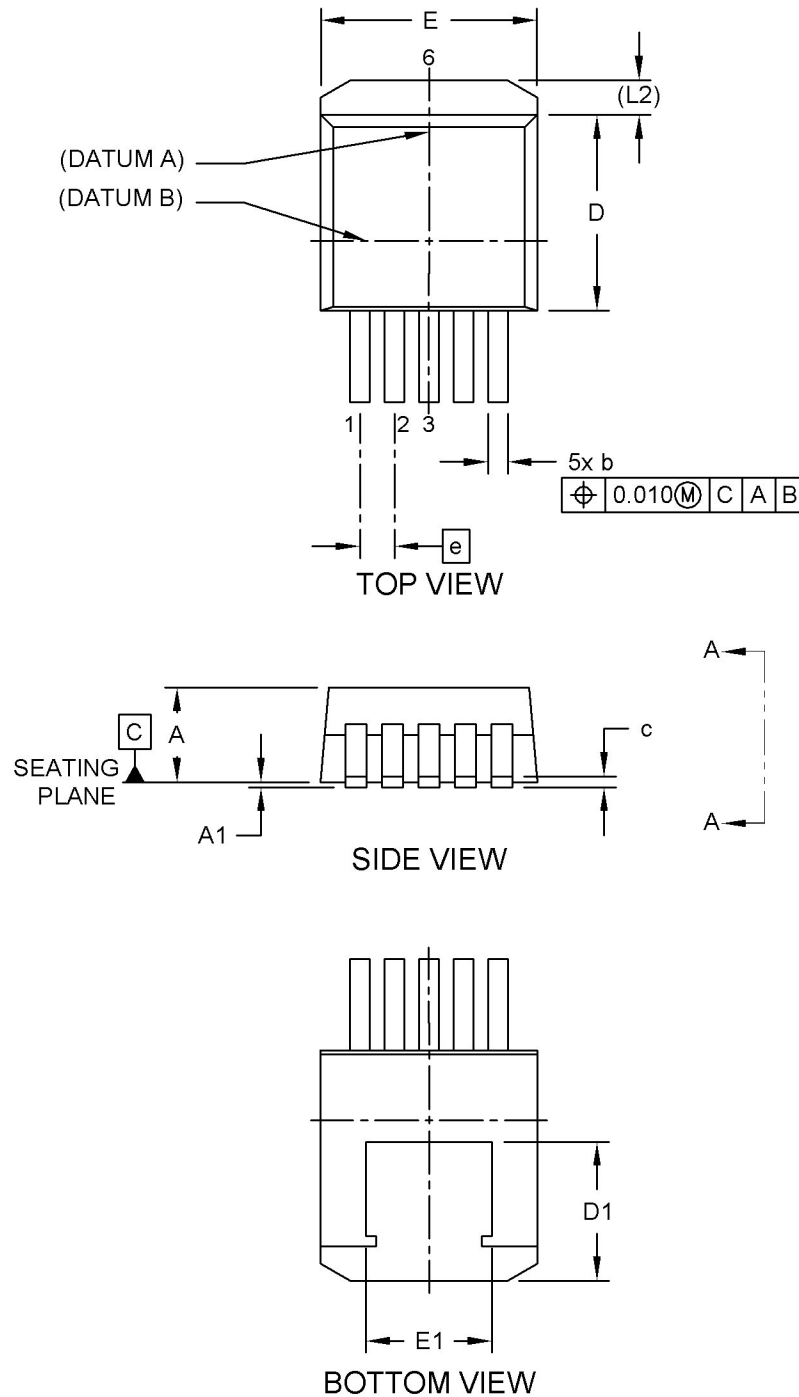

Microchip Technology Drawing C04-012-J7X Rev D Sheet 1 of 2

5-Lead Plastic Double Deca-Watt Package (J7X) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

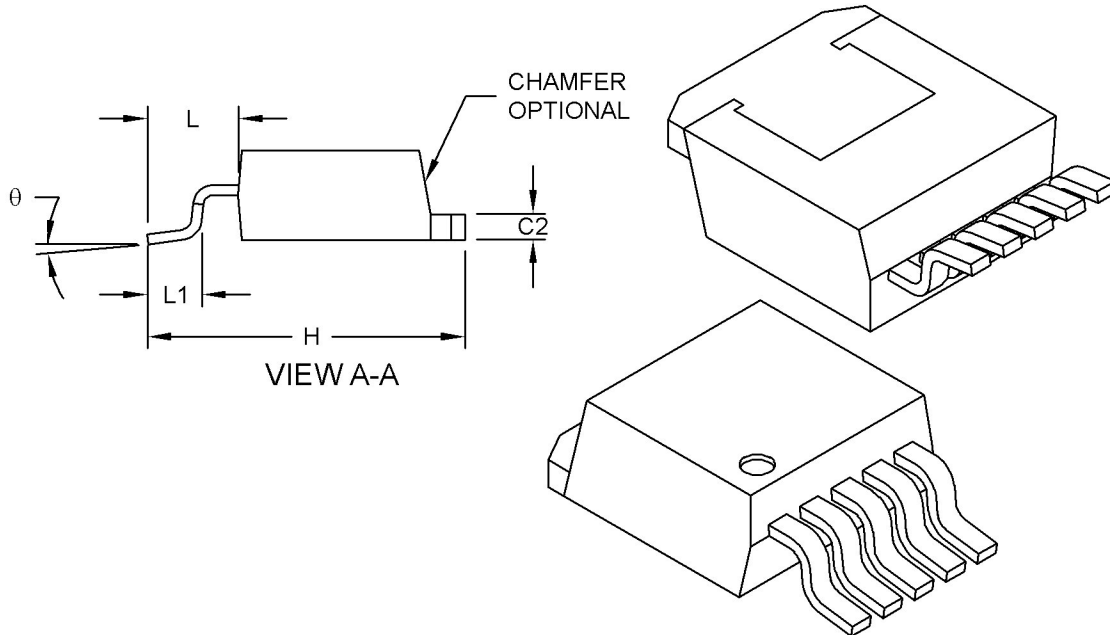

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	5		
Pitch	e	.067 BSC		
Molded Package Thickness	A	.160	-	.190
Standoff	A1	.000	-	.010
Overall Length	H	.575	-	.625
Overall Width	E	.380	-	.420
Thermal Tab Width	E1	.245	-	-
Molded Package Length	D	.330	-	.380
Thermal Tab Length	D1	.270	-	-
Lead Thickness	c	.015	-	.029
Lead Width	b	.020	-	.039
Thermal Tab Thickness	C2	.045	-	.065
Lead Length	L	.070	-	.110
Foot Print Length	L1	-	-	.066
Thermal Tab Length	L2	0.13 REF		
Foot Angle	θ	0°	-	8°

Notes:


- § Significant Characteristic
- Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-012-J7X Rev D Sheet 2 of 2

5-Lead Plastic Double Deca-Watt Package (J7X) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

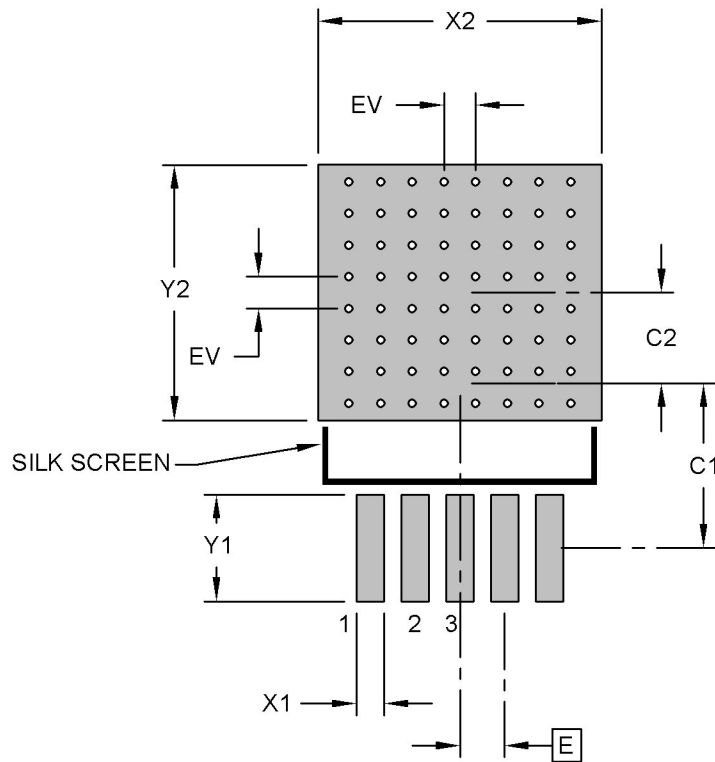

RECOMMENDED LAND PATTERN

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.067 BSC		
Optional Contact Pad Width	X2			.423
Optional Contact Pad Length	Y2			.382
Contact Pad Spacing	C1		.246	
Contact Pad Spacing	C2		.136	
Contact Pad Width (X3)	X1			.041
Contact Pad Length (X3)	Y1			.159
Thermal Via Diameter	V		.013	
Thermal Via Pitch	EV		.047	

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2012-J7X Rev D