


40-Lead Ceramic Dual In-Line with Window (JW) ~ .600" Body [CERDIP]

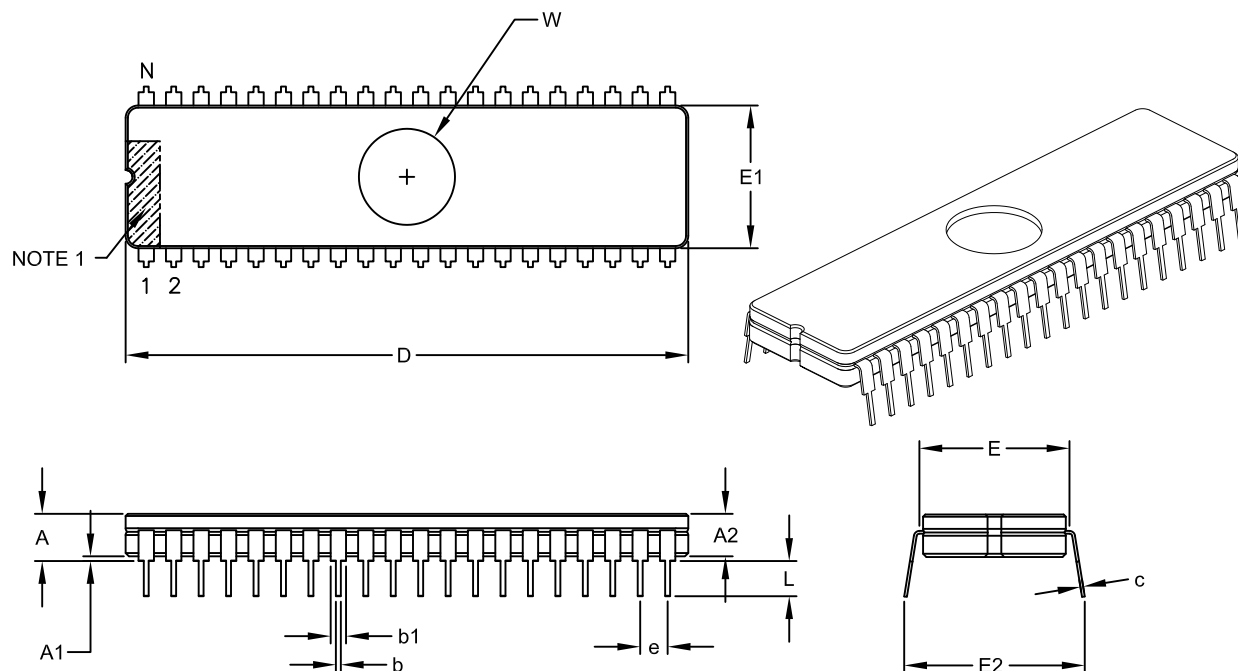

		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		40		
Pitch	e		.100 BSC		
Top to Seating Plane	A	-	-	-	.225
Ceramic Package Height	A2	.140	-	-	.175
Base to Seating Plane §	A1	.015	-	-	-
Shoulder to Shoulder Width	E	.590	-	-	.625
Ceramic Package Width	E1	.510	.520	.583	
Overall Length	D	2.030	2.050	2.070	
Tip to Seating Plane	L	.125	-	.200	
Lead Thickness	c	.008	-	.015	
Upper Lead Width	b1	.045	-	.065	
Lower Lead Width	b	.015	-	.023	
Overall Row Spacing	E2	.620	-	.710	
Window Diameter	W	.340	.350	.360	

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.