


Packaging Diagrams and Parameters

7-Lead Plastic (EK) [DDPAK]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

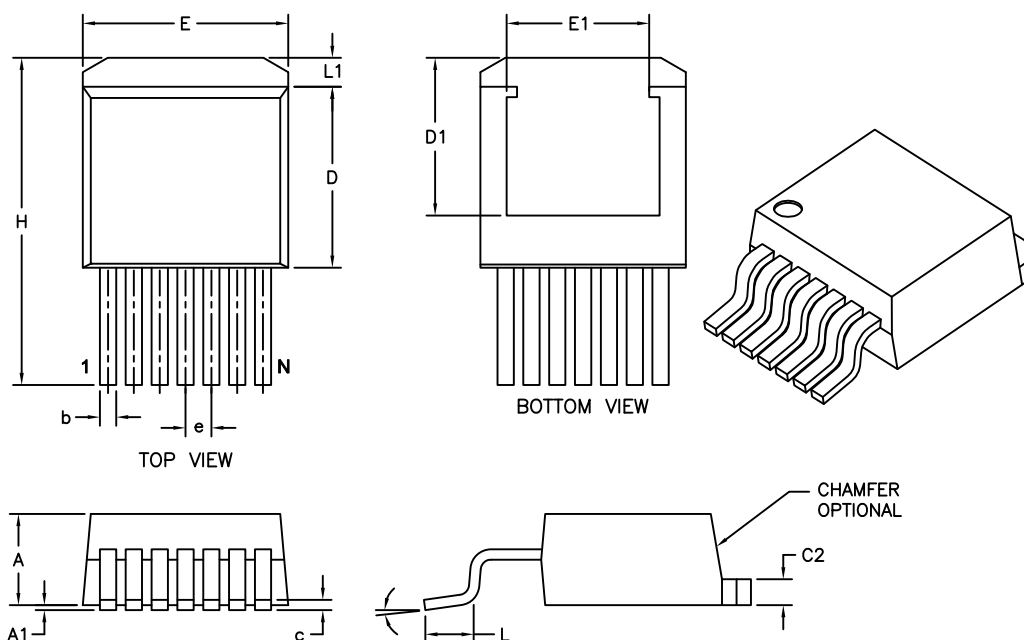


Dimension Limits	Units	INCHES		
		MIN	NOM	MAX
Number of Pins	N	7		
Pitch	e	.050 BSC		
Overall Height	A	.160	-	.190
Standoff §	A1	.000	-	.010
Overall Width	E	.380	-	.420
Exposed Pad Width	E1	.245	-	-
Molded Package Length	D	.330	-	.380
Overall Length	H	.549	-	.625
Exposed Pad Length	D1	.270	-	-
Lead Thickness	c	.014	-	.029
Pad Thickness	C2	.045	-	.065
Lead Width	b	.020	-	.037
Foot Length	L	.068	-	.110
Pad Length	L1	-	-	.067
Foot Angle		0°	-	8°

Notes:

- § Significant Characteristic
- Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-015B

7-Lead Plastic (EK) [DDPAK]

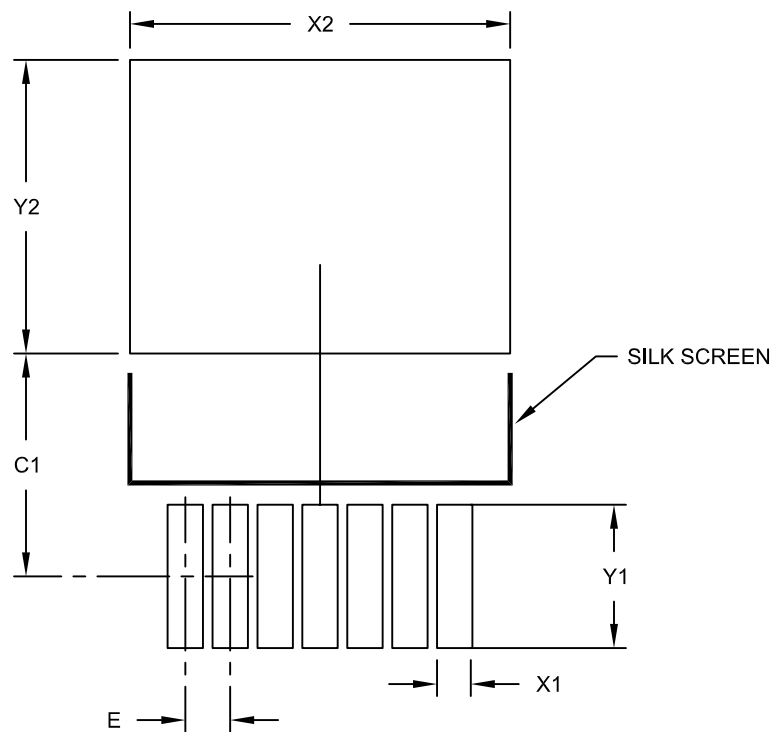

RECOMMENDED LAND PATTERN

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.050 BSC		
Optional Center Pad Width	X2			.423
Optional Center Pad Length	Y2			.327
Contact Pad Spacing	C1		.248	
Contact Pad Width (X7)	X1			.039
Contact Pad Length (X7)	Y1			.159

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.