
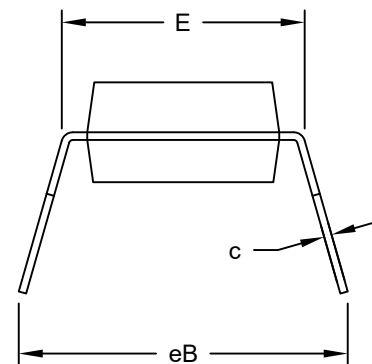
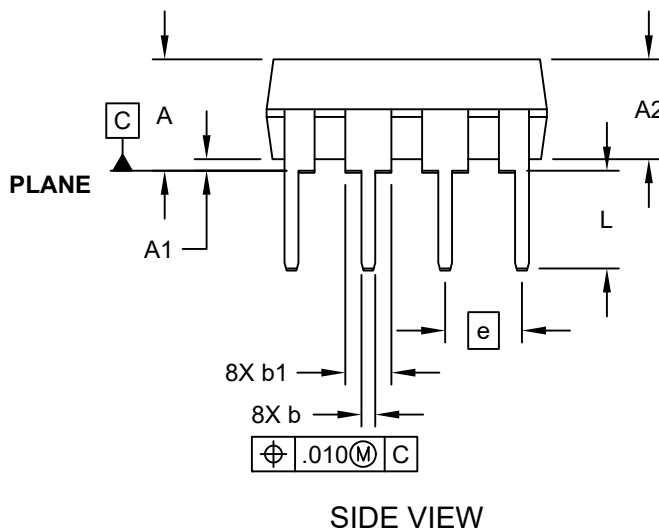
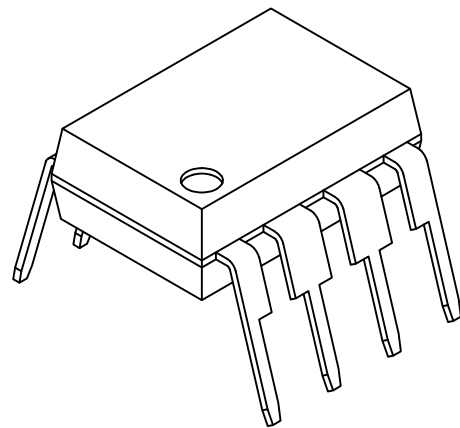


## 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

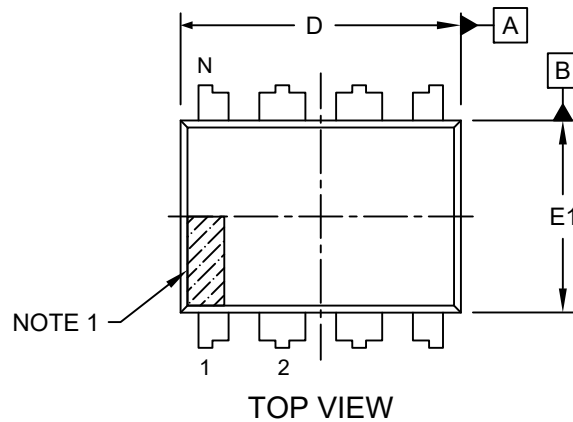

## 8-Lead Plastic Dual In-Line (P) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

### ALTERNATE LEAD DESIGN (NOTE 5)

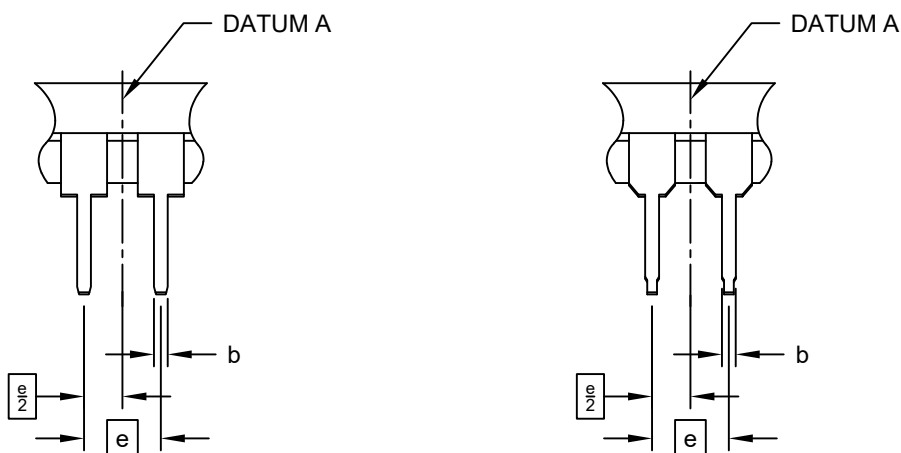





| Units                      |      | INCHES   |      |      |
|----------------------------|------|----------|------|------|
| Dimension Limits           |      | MIN      | NOM  | MAX  |
| Number of Pins             | N    | 8        |      |      |
| Pitch                      | e    | .100 BSC |      |      |
| Top to Seating Plane       | A    | -        | -    | .210 |
| Molded Package Thickness   | A2   | .115     | .130 | .195 |
| Base to Seating Plane      | A1   | .015     | -    | -    |
| Shoulder to Shoulder Width | E    | .290     | .310 | .325 |
| Molded Package Width       | E1   | .240     | .250 | .280 |
| Overall Length             | D    | .348     | .365 | .400 |
| Tip to Seating Plane       | L    | .115     | .130 | .150 |
| Lead Thickness             | c    | .008     | .010 | .015 |
| Upper Lead Width           | b1   | .040     | .060 | .070 |
| Lower Lead Width           | b    | .014     | .018 | .022 |
| Overall Row Spacing        | § eB | -        | -    | .430 |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- Lead design above seating plane may vary, based on assembly vendor.

## 8-Lead Plastic Dual In-Line (PA) - 300 mil Body [PDIP]


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

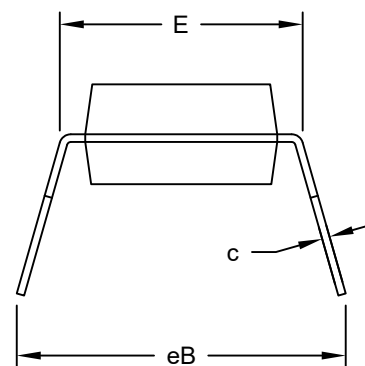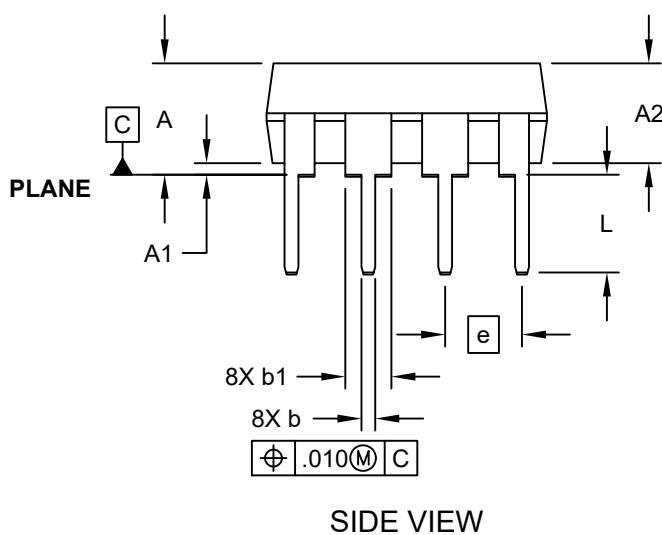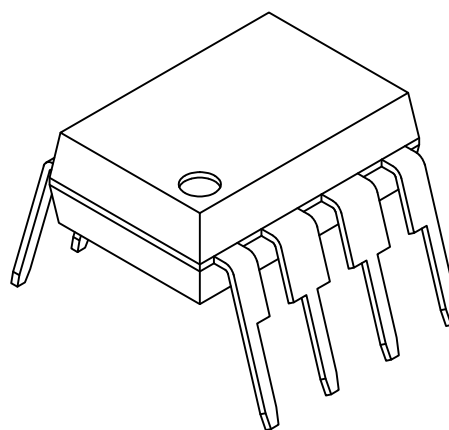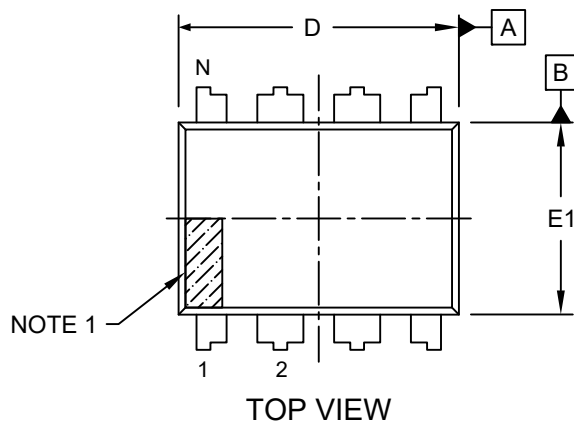

## 8-Lead Plastic Dual In-Line (PA) - 300 mil Body [PDIP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

### ALTERNATE LEAD DESIGN (NOTE 5)

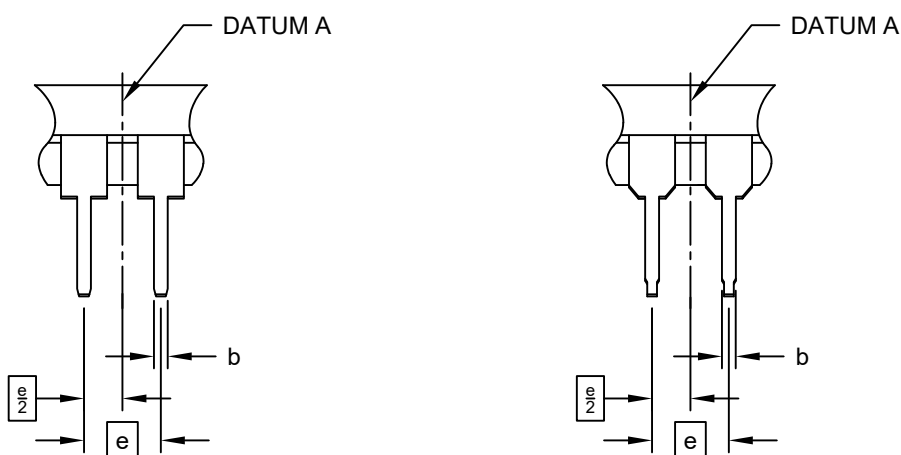





| Units                      |      | INCHES   |      |      |
|----------------------------|------|----------|------|------|
| Dimension Limits           |      | MIN      | NOM  | MAX  |
| Number of Pins             | N    | 8        |      |      |
| Pitch                      | e    | .100 BSC |      |      |
| Top to Seating Plane       | A    | -        | -    | .210 |
| Molded Package Thickness   | A2   | .115     | .130 | .195 |
| Base to Seating Plane      | A1   | .015     | -    | -    |
| Shoulder to Shoulder Width | E    | .290     | .310 | .325 |
| Molded Package Width       | E1   | .240     | .250 | .280 |
| Overall Length             | D    | .348     | .365 | .400 |
| Tip to Seating Plane       | L    | .115     | .130 | .150 |
| Lead Thickness             | c    | .008     | .010 | .015 |
| Upper Lead Width           | b1   | .040     | .060 | .070 |
| Lower Lead Width           | b    | .014     | .018 | .022 |
| Overall Row Spacing        | § eB | -        | -    | .430 |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- Lead design above seating plane may vary, based on assembly vendor.

# 8-Lead Plastic Dual In-Line (J7B) - 300 mil Body [PDIP] Atmel Legacy Package


**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

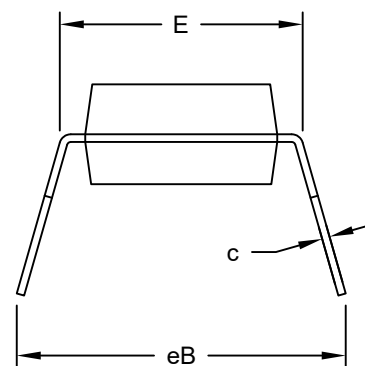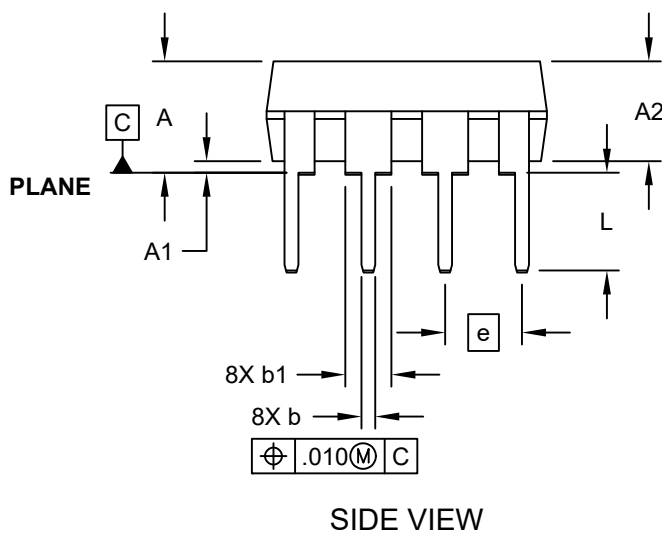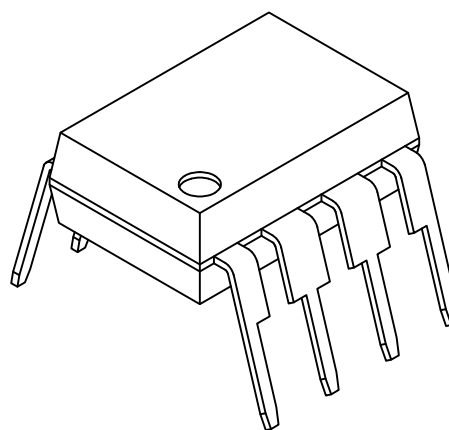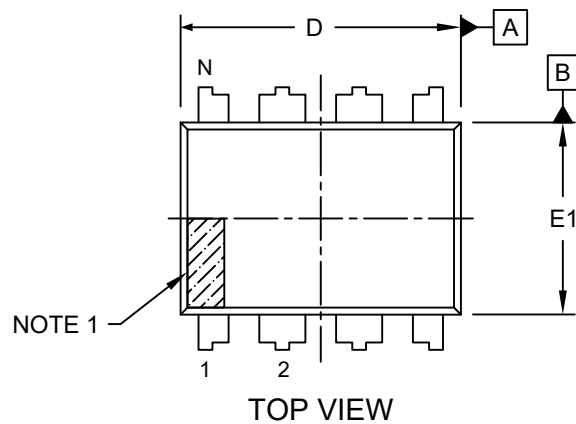

## 8-Lead Plastic Dual In-Line (J7B) - 300 mil Body [PDIP] Atmel Legacy Package

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

### ALTERNATE LEAD DESIGN (NOTE 5)

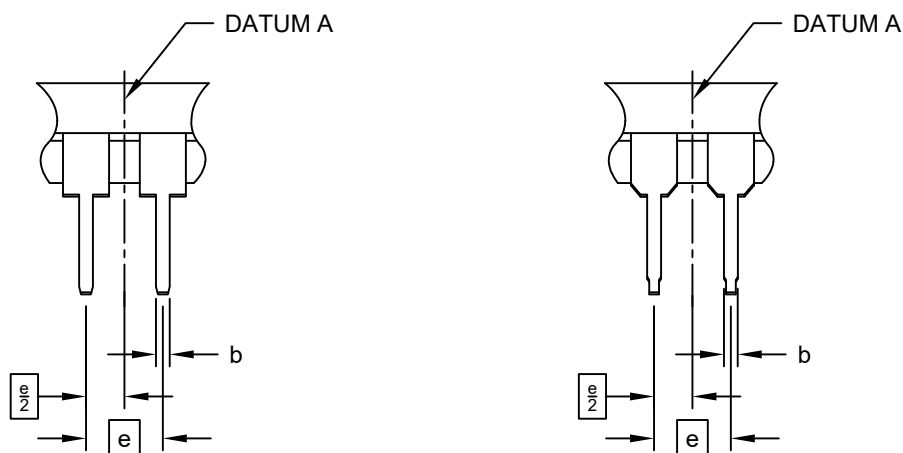

| Units                      |      | INCHES   |      |      |
|----------------------------|------|----------|------|------|
| Dimension Limits           |      | MIN      | NOM  | MAX  |
| Number of Pins             | N    | 8        |      |      |
| Pitch                      | e    | .100 BSC |      |      |
| Top to Seating Plane       | A    | -        | -    | .210 |
| Molded Package Thickness   | A2   | .115     | .130 | .195 |
| Base to Seating Plane      | A1   | .015     | -    | -    |
| Shoulder to Shoulder Width | E    | .290     | .310 | .325 |
| Molded Package Width       | E1   | .240     | .250 | .280 |
| Overall Length             | D    | .348     | .365 | .400 |
| Tip to Seating Plane       | L    | .115     | .130 | .150 |
| Lead Thickness             | c    | .008     | .010 | .015 |
| Upper Lead Width           | b1   | .040     | .060 | .070 |
| Lower Lead Width           | b    | .014     | .018 | .022 |
| Overall Row Spacing        | § eB | -        | -    | .430 |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- Lead design above seating plane may vary, based on assembly vendor.