


## Packaging Diagrams and Parameters

64-Lead Plastic Metric Quad FlatPack (BU) - 14x14x2.7 mm Body, 3.20 mm Footprint [MQFP]

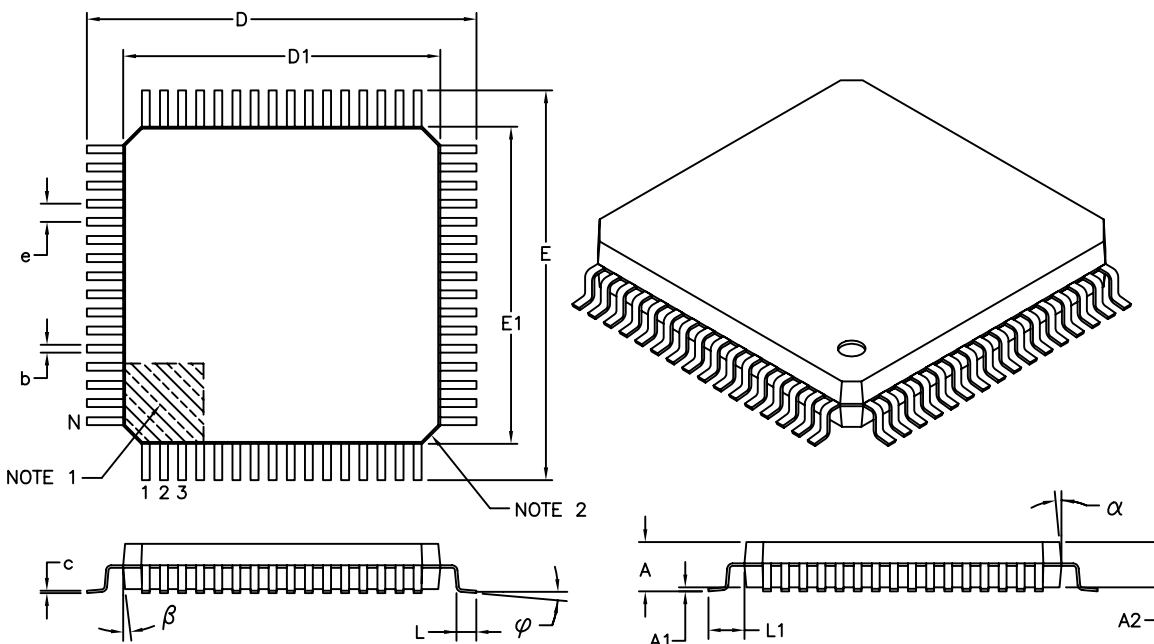


| Dimension                | Units | MILLIMETERS |      |      |
|--------------------------|-------|-------------|------|------|
|                          |       | MIN         | NOM  | MAX  |
| Number of Leads          | N     | 64          |      |      |
| Lead Pitch               | e     | 0.80 BSC    |      |      |
| Overall Height           | A     | —           | —    | 3.15 |
| Molded Package Thickness | A2    | 2.50        | 2.70 | 2.90 |
| Standoff §               | A1    | 0.00        | —    | 0.25 |
| Overall Width            | E     | 17.20 BSC   |      |      |
| Molded Package Width     | E1    | 14.00 BSC   |      |      |
| Overall Length           | D     | 17.20 BSC   |      |      |
| Molded Package Length    | D1    | 14.00 BSC   |      |      |
| Foot Length              | L     | 0.73        | 0.88 | 1.03 |
| Footprint                | L1    | 1.60 REF    |      |      |
| Foot Angle               | φ     | 0°          | —    | 7°   |
| Lead Thickness           | c     | 0.11        | —    | 0.23 |
| Lead Width               | b     | 0.29        | —    | 0.45 |
| Mold Draft Angle Top     | α     | 5°          | —    | 16°  |
| Mold Draft Angle Bottom  | β     | 5°          | —    | 16°  |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.
- § Significant Characteristic
- Formerly TelCom PQFP package.

64-Lead Plastic Metric Quad FlatPack (BU) - 14x14x2.7 mm Body 3.20 mm Footprint [MQFP]

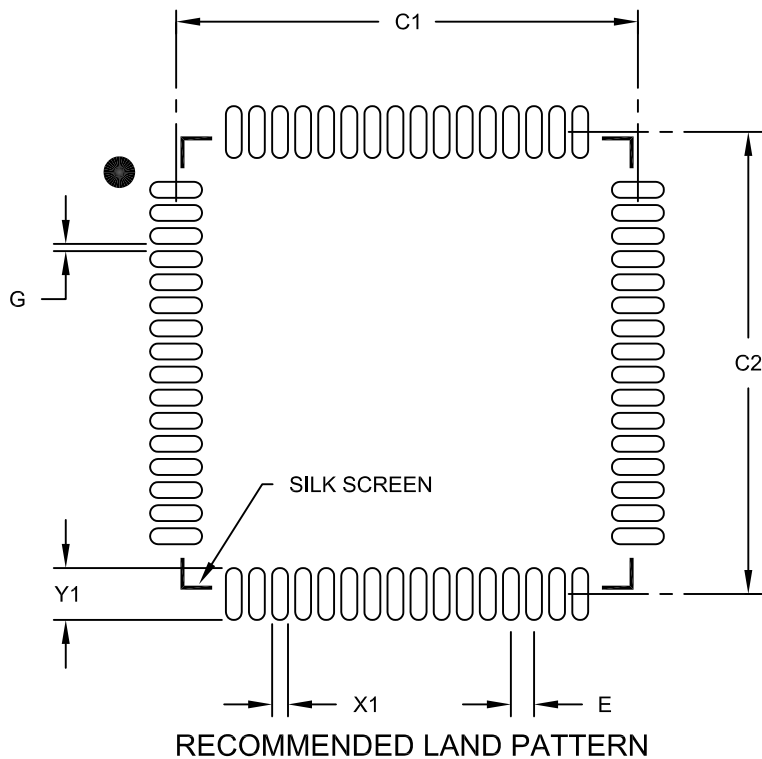

| Units                    |    | MILLIMETERS |       |      |
|--------------------------|----|-------------|-------|------|
| Dimension Limits         |    | MIN         | NOM   | MAX  |
| Contact Pitch            | E  | 0.80 BSC    |       |      |
| Contact Pad Spacing      | C1 |             | 16.10 |      |
| Contact Pad Spacing      | C2 |             | 16.10 |      |
| Contact Pad Width (X64)  | X1 |             |       | 0.55 |
| Contact Pad Length (X64) | Y1 |             |       | 1.80 |
| Distance Between Pads    | G  | 0.25        |       |      |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.