


Packaging Diagrams and Parameters

3-Lead Plastic Small Outline Transistor (MB) - [SOT-89]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

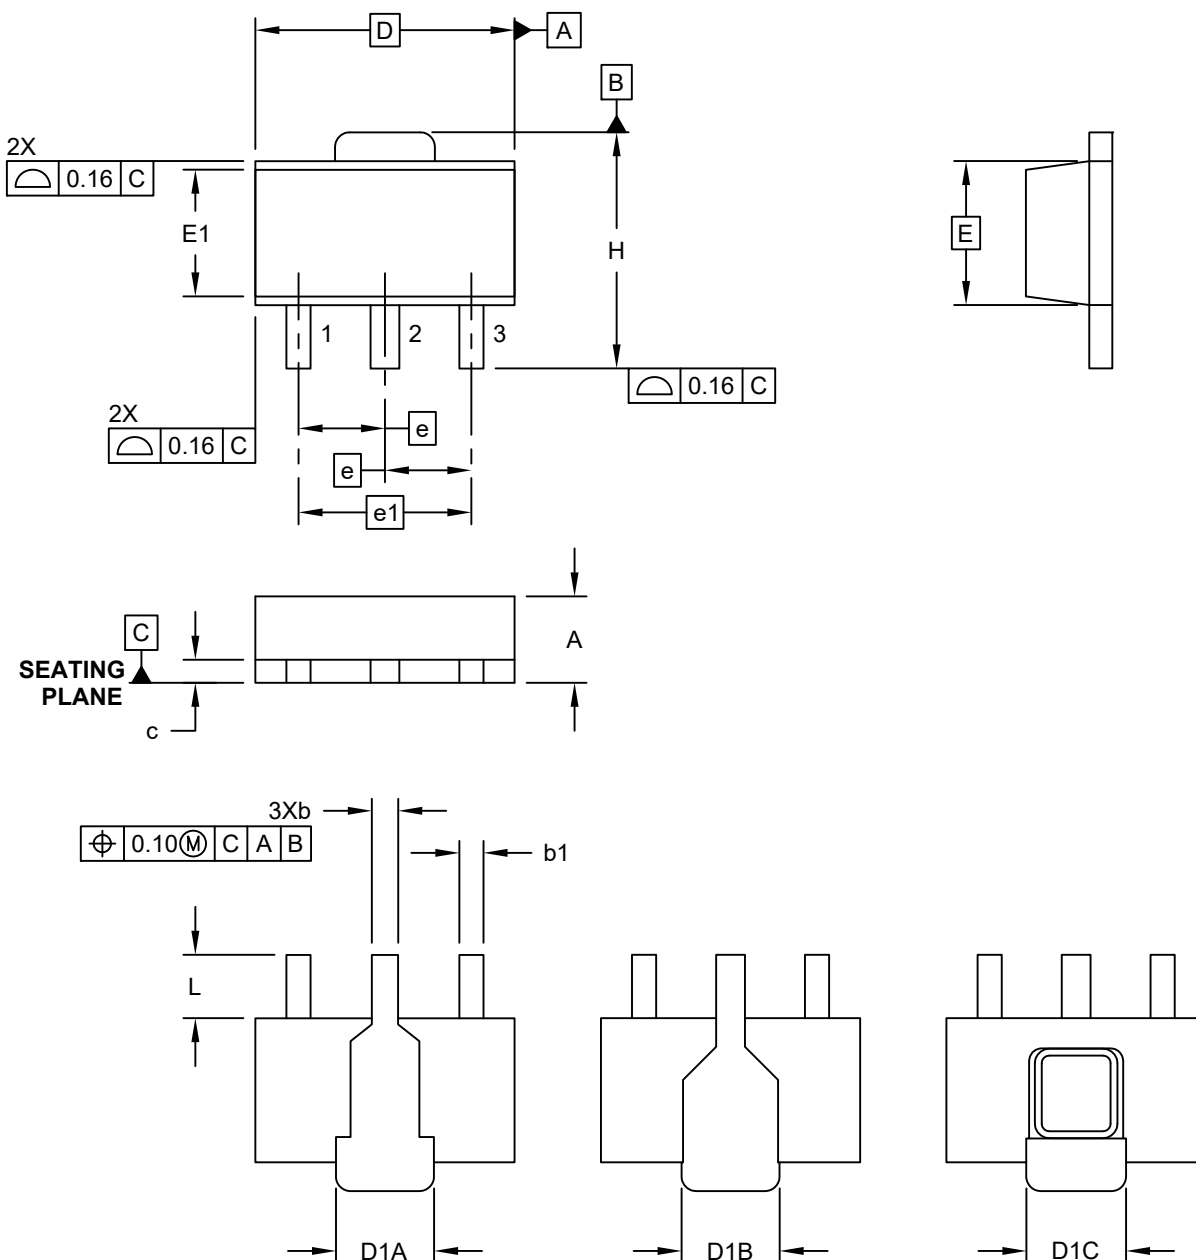


OPTIONAL BACKSIDE PATTERNS —
PARTS MAY BE SUPPLIED WITH
ANY PATTERN SHOWN

Packaging Diagrams and Parameters

3-Lead Plastic Small Outline Transistor (MB) - [SOT-89]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

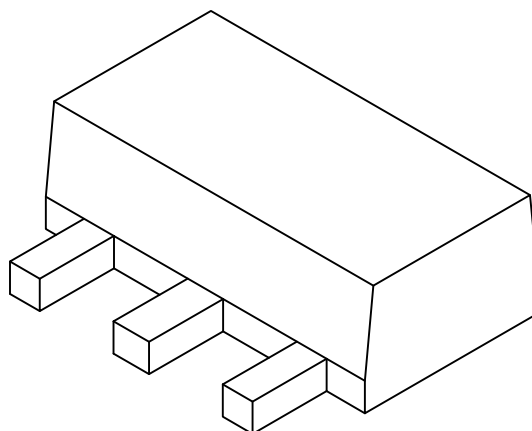

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		3		
Pitch	e		1.50 BSC		
Outside Lead Pitch	e1		3.00 BSC		
Overall Height	A		1.40	1.50	1.60
Overall Width	H		3.94	4.10	4.25
Molded Package Width at Base	E		2.50 BSC		
Molded Package Width at Top	E1		2.13	2.20	2.29
Overall Length	D		4.50 BSC		
Tab Length (Option A)	D1A		1.63	1.73	1.83
Tab Length (Option B)	D1B		1.40	1.60	1.75
Tab Length (Option C)	D1C		1.62	1.73	1.83
Foot Length	L		0.79	1.10	1.20
Lead Thickness	c		0.35	0.40	0.44
Lead 2 Width	b		0.41	0.50	0.56
Leads 1 & 3 Width	b1		0.36	0.42	0.48


Notes:

- Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.127mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Land Pattern

3-Lead Plastic Small Outline Transistor (MB) - [SOT-89]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

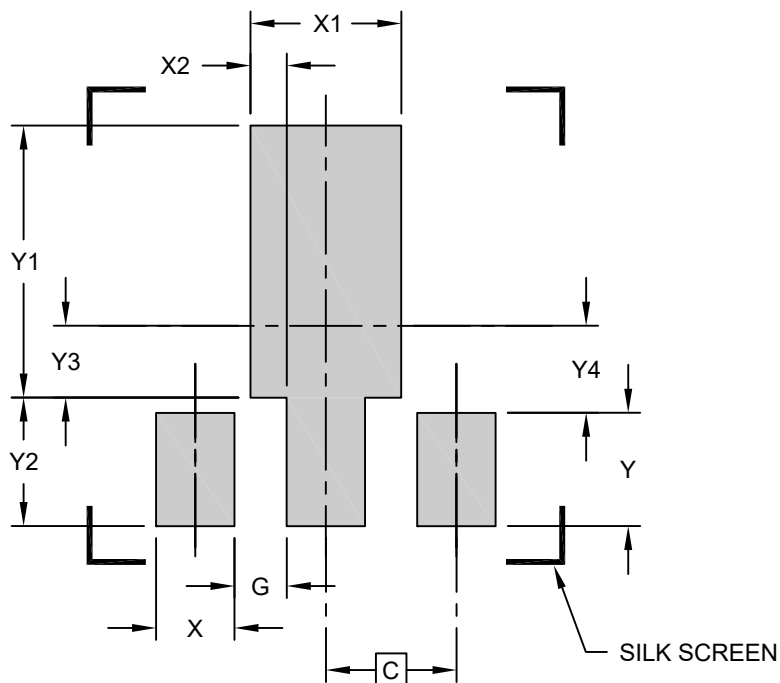

RECOMMENDED LAND PATTERN

Units	MILLIMETERS		
Dimension Limits	MIN	NOM	MAX
C	1.50 (BSC)		
X (3 PLACES)		0.900	
X1		1.733	
X2 (2 PLACES)		0.416	
G (2 PLACES)		0.600	
Y (2 PLACES)		1.300	
Y1		3.125	
Y2		1.475	
Y3		0.825	
Y4		1.000	

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.