



3-Lead Transistor Outline Package (AB) - [TO-220]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

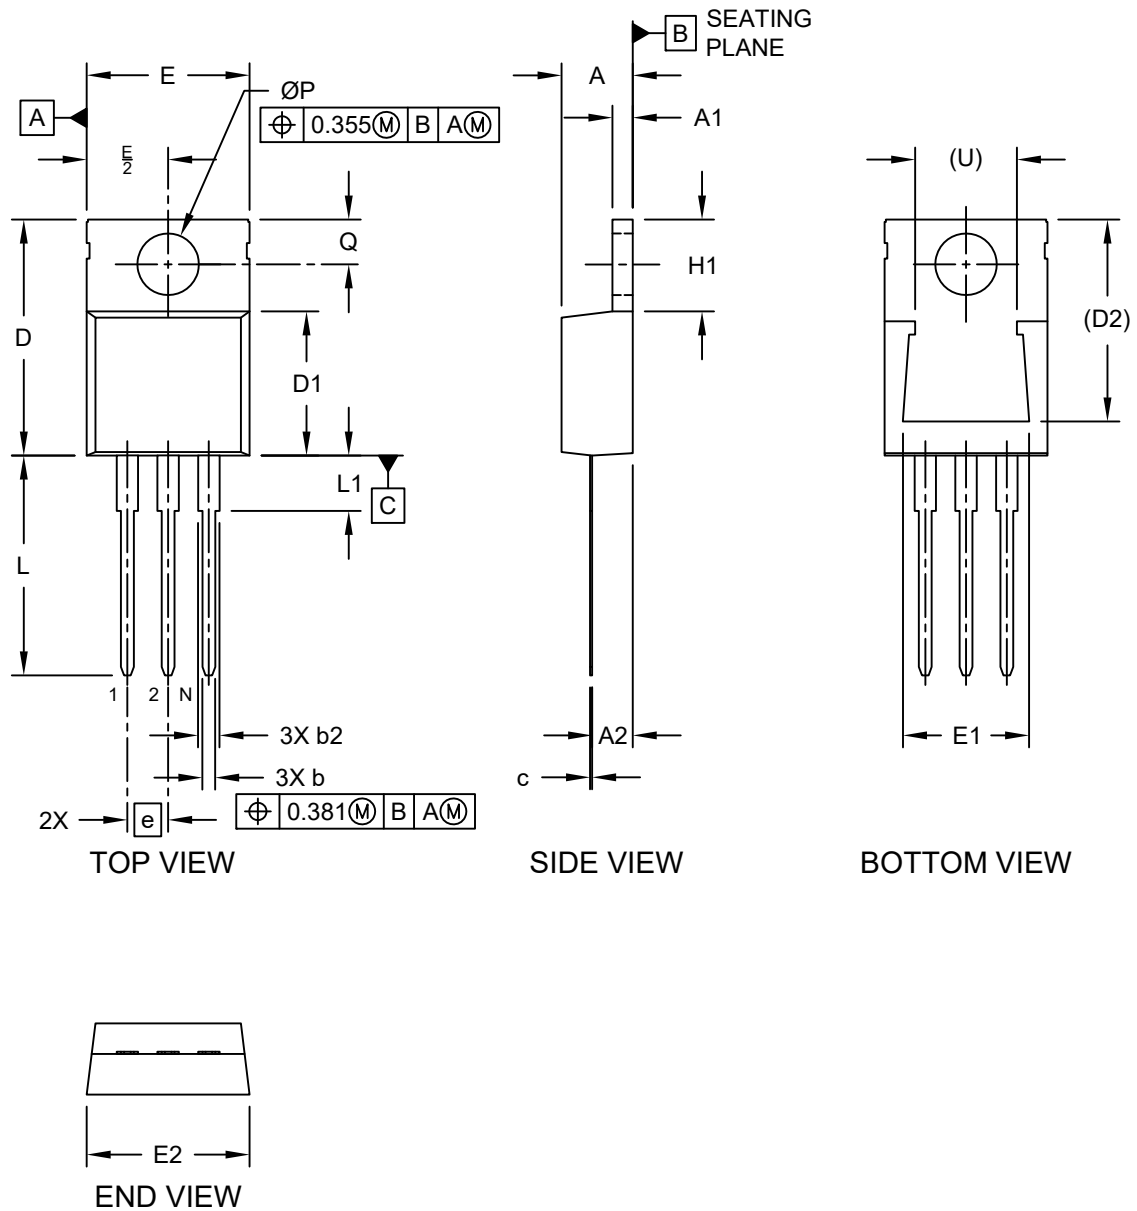

3-Lead Transistor Outline Package (AB) - [TO-220]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

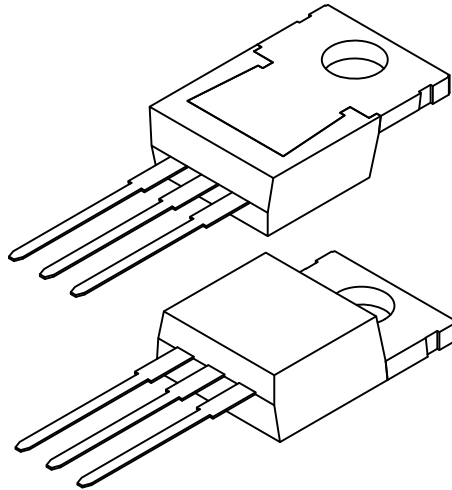

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		3		
Terminal Pitch	e		2.54 BSC		
Overall Height	A		4.064	4.445	4.826
Tab Thickness	A1		1.143	1.270	1.397
Base to Lead	A2		2.032	2.540	3.048
Terminal Width	b		0.635	0.826	1.016
Shoulder Width	b2		1.143	1.334	1.524
Terminal Thickness	c		0.305	0.432	0.559
Overall Length	D		13.730	14.730	15.730
Molded Package Length	D1		8.850	9.000	9.150
Exposed Pad Length	D2		12.6 REF		
Overall Width	E		9.652	10.160	10.668
Exposed Pad Width	U		6.35 REF		
Exposed Pad Width	E1		6.858	7.874	8.890
Body Width	E2		9.779	10.224	10.668
Tab Length	H1		5.842	6.350	6.858
Terminal Length	L		12.700	13.716	14.732
Terminal Shoulder Length	L1		3.050	3.455	3.860
Mounting Hole Diameter	P		3.708	3.835	3.962
Mounting Hole Center	Q		2.540	2.794	3.048

Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.


3-Lead Transistor Outline Package (Supertex N5) - [TO-220] Supertex Legacy

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

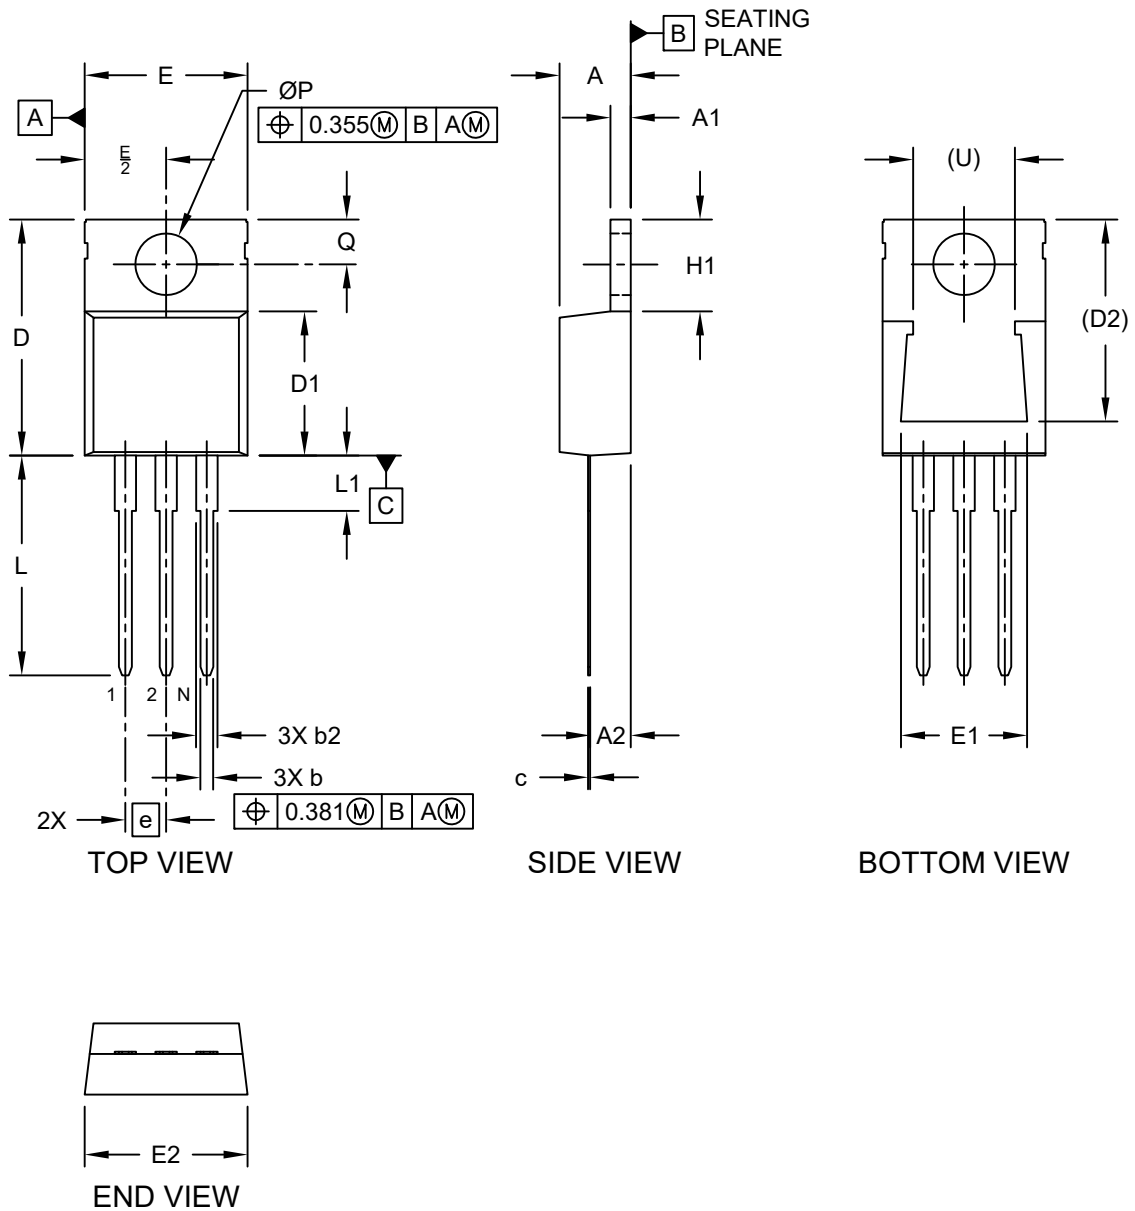

3-Lead Transistor Outline Package (Supertex N5) - [TO-220] Supertex Legacy

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

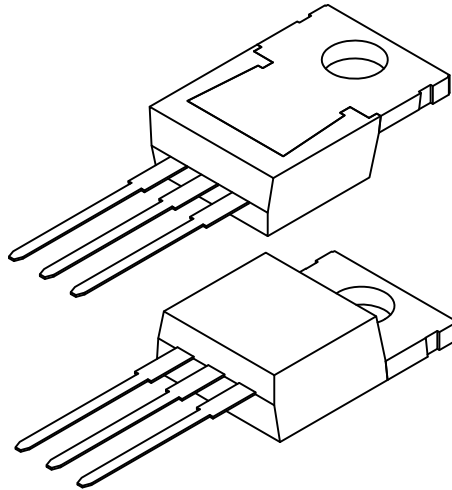

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		3		
Terminal Pitch	e		2.54 BSC		
Overall Height	A		4.064	4.445	4.826
Tab Thickness	A1		1.143	1.270	1.397
Base to Lead	A2		2.032	2.540	3.048
Terminal Width	b		0.635	0.826	1.016
Shoulder Width	b2		1.143	1.334	1.524
Terminal Thickness	c		0.305	0.432	0.559
Overall Length	D		13.730	14.730	15.730
Molded Package Length	D1		8.850	9.000	9.150
Exposed Pad Length	D2		12.6 REF		
Overall Width	E		9.652	10.160	10.668
Exposed Pad Width	U		6.35 REF		
Exposed Pad Width	E1		6.858	7.874	8.890
Body Width	E2		9.779	10.224	10.668
Tab Length	H1		5.842	6.350	6.858
Terminal Length	L		12.700	13.716	14.732
Terminal Shoulder Length	L1		3.050	3.455	3.860
Mounting Hole Diameter	P		3.708	3.835	3.962
Mounting Hole Center	Q		2.540	2.794	3.048

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.