


Packaging Diagrams and Parameters

24-Lead Skinny Plastic Dual In-Line (PF) - 300 mil Body [SPDIP]

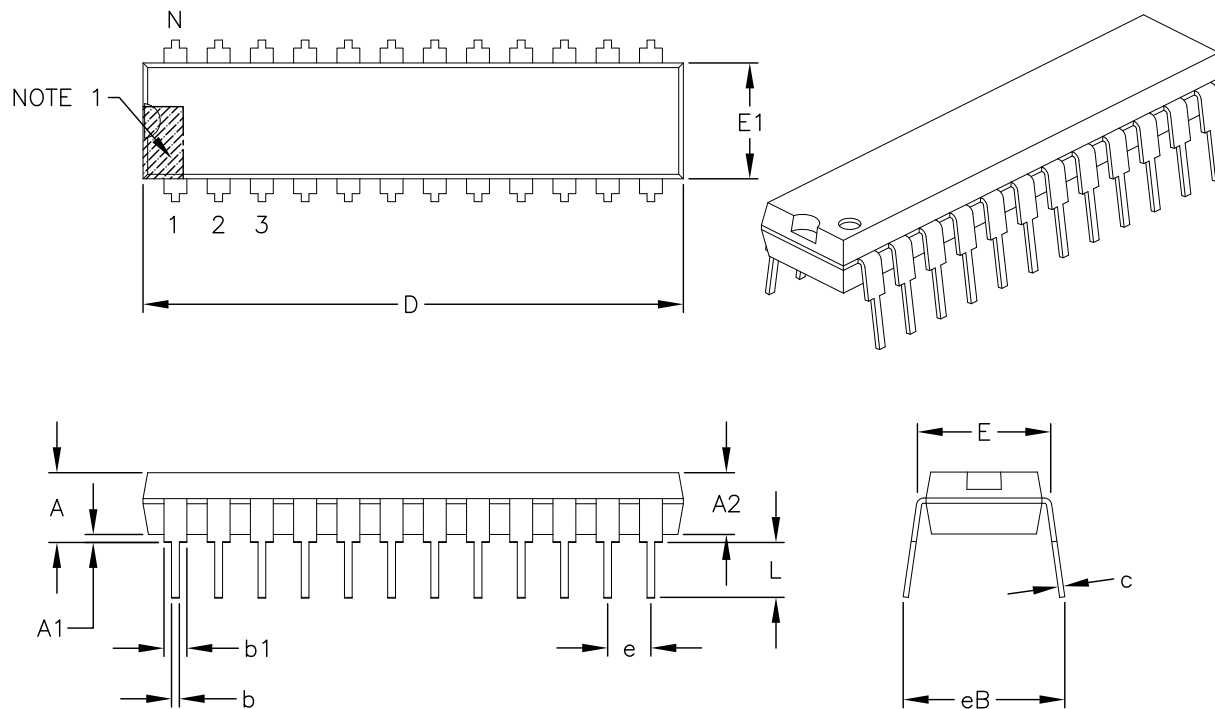


		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N			24	
Pitch	e			.100 BSC	
Top to Seating Plane	A		—	—	.210
Molded Package Thickness	A2		.115	.130	.195
Base to Seating Plane	A1		.015	—	—
Shoulder to Shoulder Width	E		.280	.310	.325
Molded Package Width	E1		.240	.250	.280
Overall Length	D		1.155	1.250	1.280
Tip to Seating Plane	L		.115	.130	.160
Lead Thickness	c		.008	.010	.015
Upper Lead Width	b1		.045	.060	.070
Lower Lead Width	b		.014	.018	.023
Overall Row Spacing	§ eB		—	—	.430

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Packaging Diagrams and Parameters

24-Lead Skinny Plastic Dual In-Line (SP) - 300 mil Body [SPDIP]

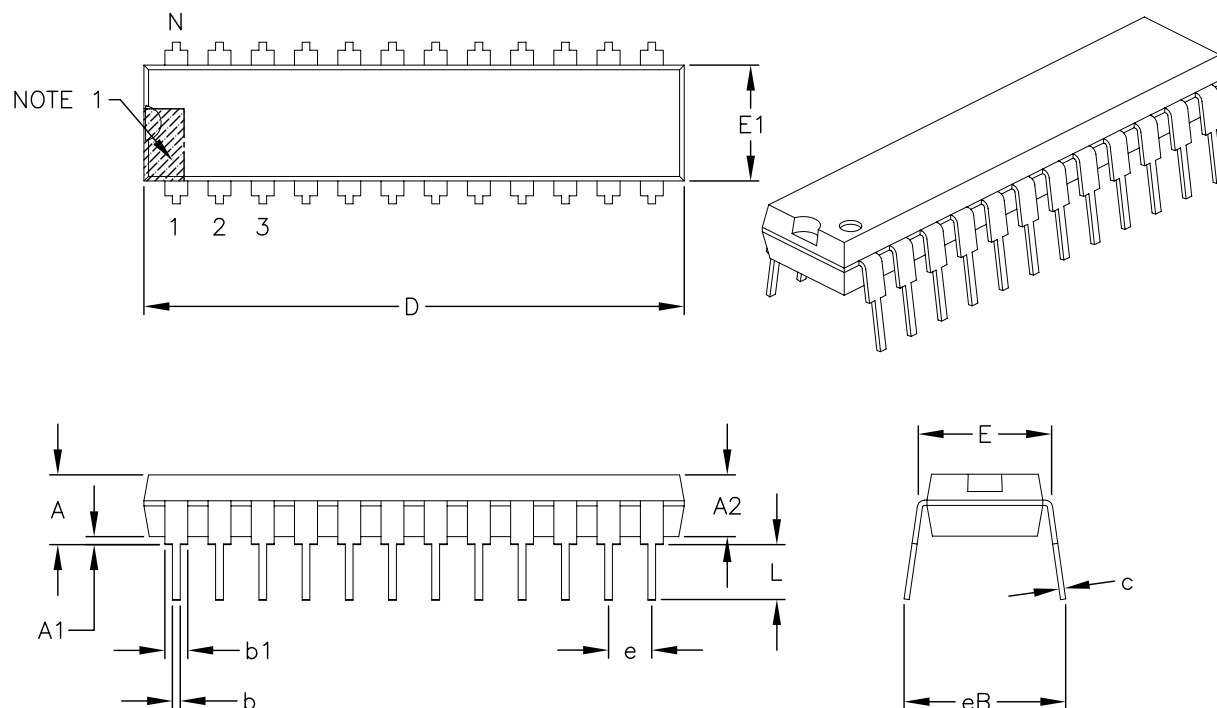

		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		24		
Pitch	e		.100 BSC		
Top to Seating Plane	A		—	—	.210
Molded Package Thickness	A2		.115	.130	.195
Base to Seating Plane	A1		.015	—	—
Shoulder to Shoulder Width	E		.280	.310	.325
Molded Package Width	E1		.240	.250	.280
Overall Length	D		1.155	1.250	1.280
Tip to Seating Plane	L		.115	.130	.160
Lead Thickness	c		.008	.010	.015
Upper Lead Width	b1		.045	.060	.070
Lower Lead Width	b		.014	.018	.023
Overall Row Spacing	§ eB		—	—	.430

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.