



80-Lead Low-profile Plastic Quad Flatpack (PL) - 14x14 mm Body [LQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

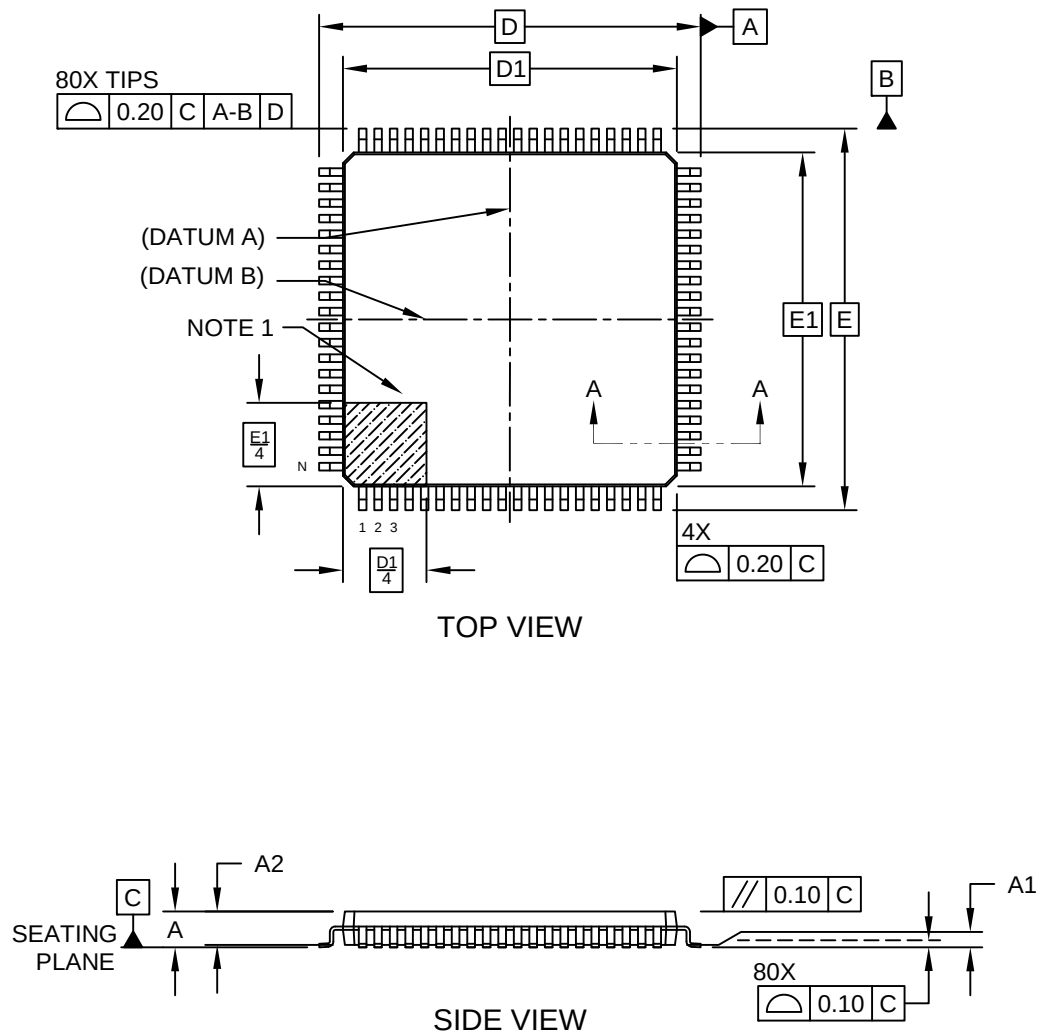

80-Lead Low-profile Plastic Quad Flatpack (PL) - 14x14 mm Body [LQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

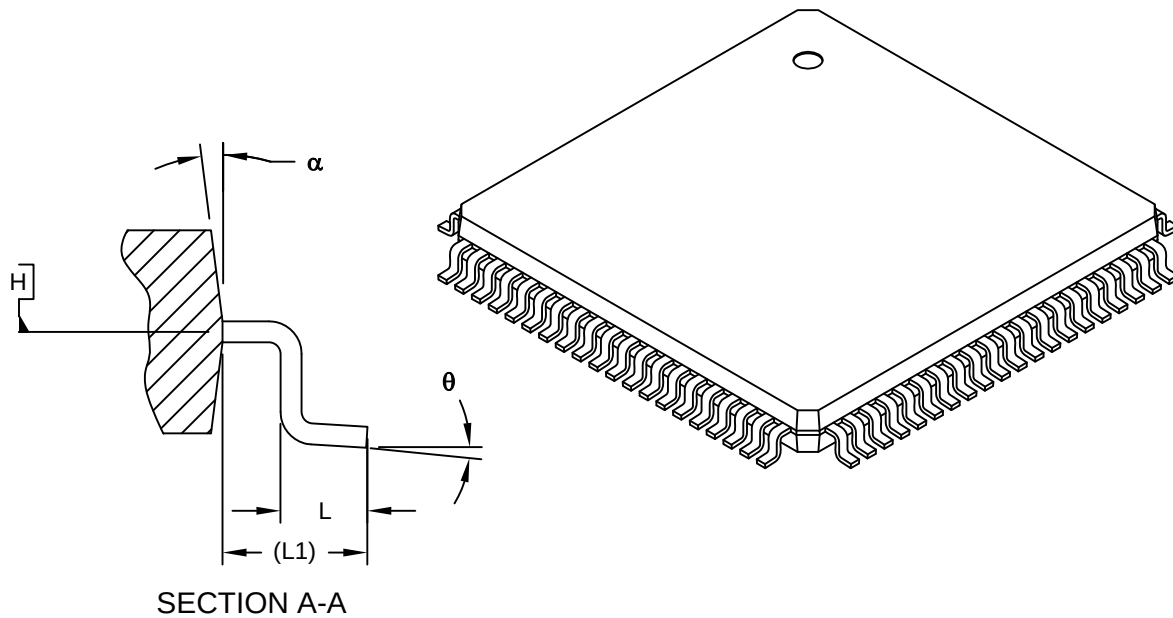


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		80		
Lead Pitch	e		0.65 BSC		
Overall Height	A		-	-	1.60
Standoff	A1		0.05	-	0.15
Molded Package Thickness	A2		1.35	1.40	1.45
Foot Length	L		0.45	0.60	0.75
Footprint	L1		1.60 REF		
Foot Angle	θ		0°	3.5°	7°
Overall Length	D		16.00 BSC		
Overall Width	E		16.00 BSC		
Molded Package Length	D1		14.00 BSC		
Molded Package Width	E1		14.00 BSC		
Lead Width	b		0.22	0.32	0.38
Mold Draft Angle Top	α		5°	-	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

80-Lead Low-profile Plastic Quad Flatpack (PL) - 14x14 mm Body [LQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

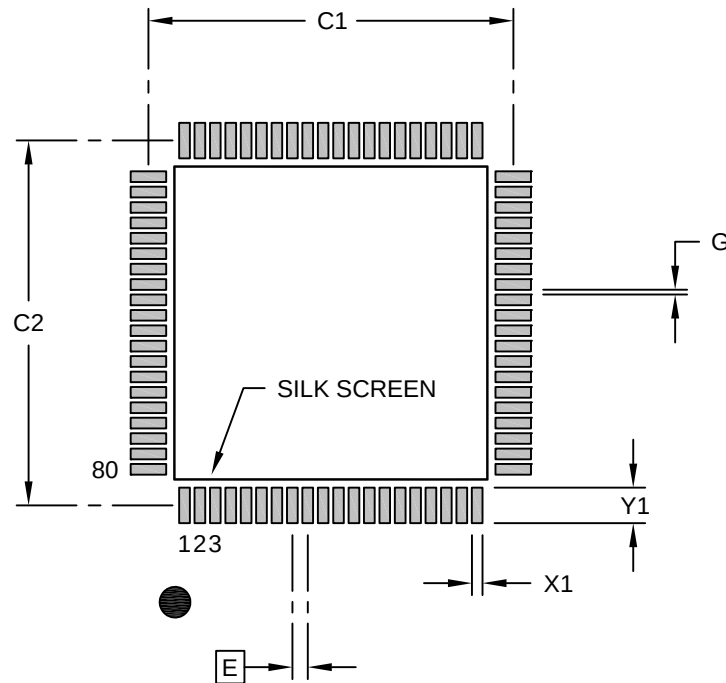

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C1		15.40	
Contact Pad Spacing	C2		15.40	
Contact Pad Width (X80)	X1			0.45
Contact Pad Length (X80)	Y1			1.50
Contact Pad to Center Pad (X76)	G	0.20		


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2054 Rev A


80-Lead Low-profile Plastic Quad Flatpack (PT) - 14x14 mm Body [LQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

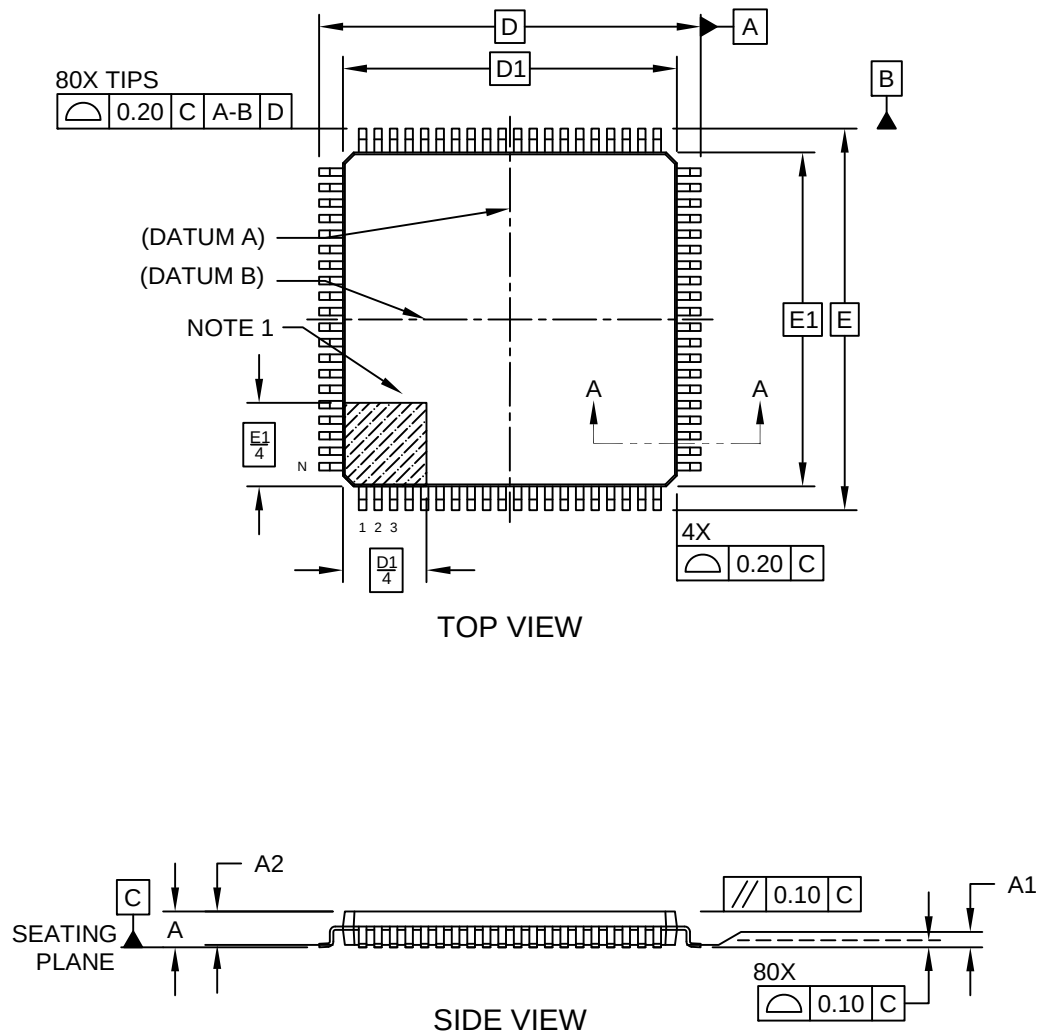

80-Lead Low-profile Plastic Quad Flatpack (PT) - 14x14 mm Body [LQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

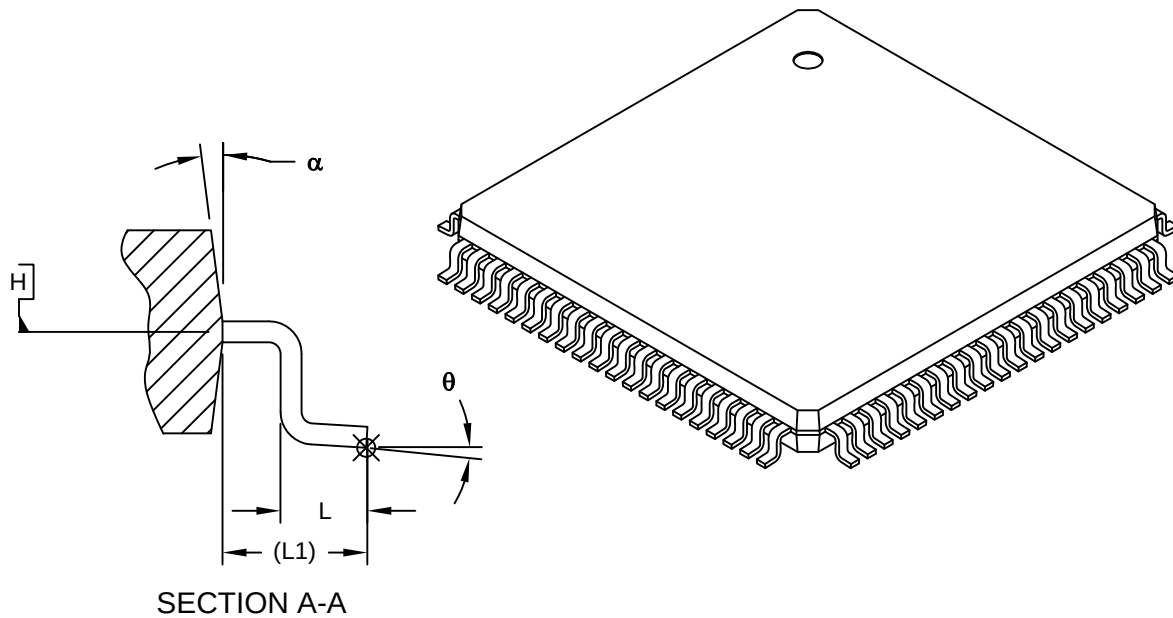


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		80		
Lead Pitch	e		0.65 BSC		
Overall Height	A		-	-	1.60
Standoff	A1		0.05	-	0.15
Molded Package Thickness	A2		1.35	1.40	1.45
Foot Length	L		0.45	0.60	0.75
Footprint	L1		1.60 REF		
Foot Angle	θ		0°	3.5°	7°
Overall Length	D		16.00 BSC		
Overall Width	E		16.00 BSC		
Molded Package Length	D1		14.00 BSC		
Molded Package Width	E1		14.00 BSC		
Lead Width	b		0.22	0.32	0.38
Mold Draft Angle Top	α		5°	-	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

80-Lead Low-profile Plastic Quad Flatpack (PT) - 14x14 mm Body [LQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

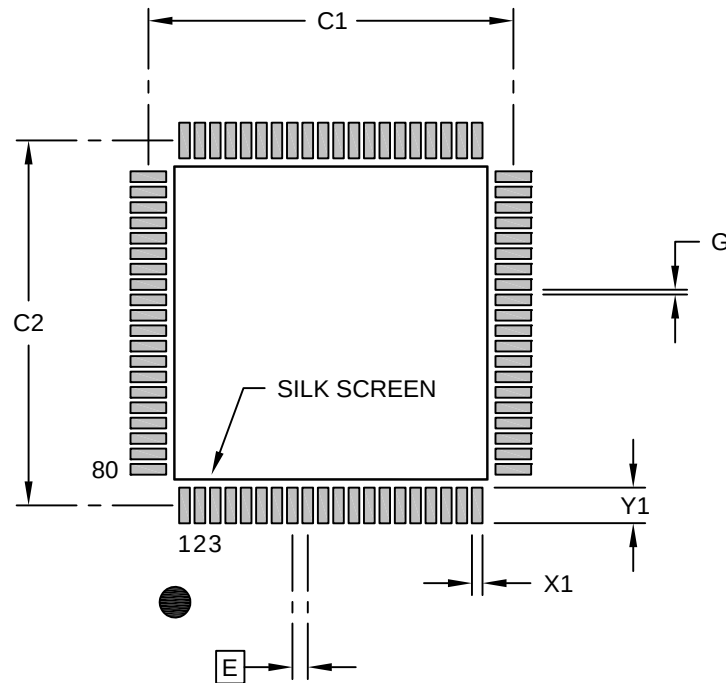

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E		0.65 BSC	
Contact Pad Spacing	C1		15.40	
Contact Pad Spacing	C2		15.40	
Contact Pad Width (X80)	X1			0.45
Contact Pad Length (X80)	Y1			1.50
Contact Pad to Center Pad (X76)	G	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2054 Rev A