
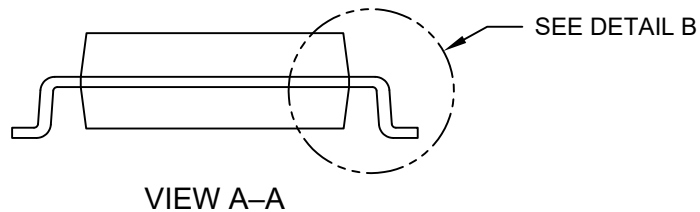
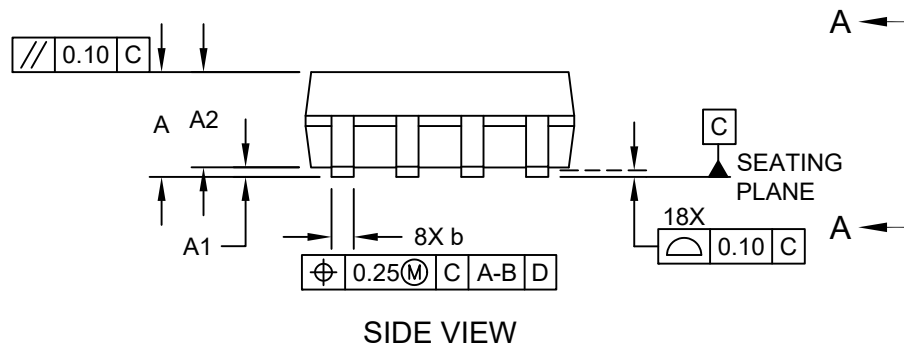



## 8-Lead Plastic Small Outline (SM) - Medium, 5.28 mm (.208 Inch) Body [SOIJ]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

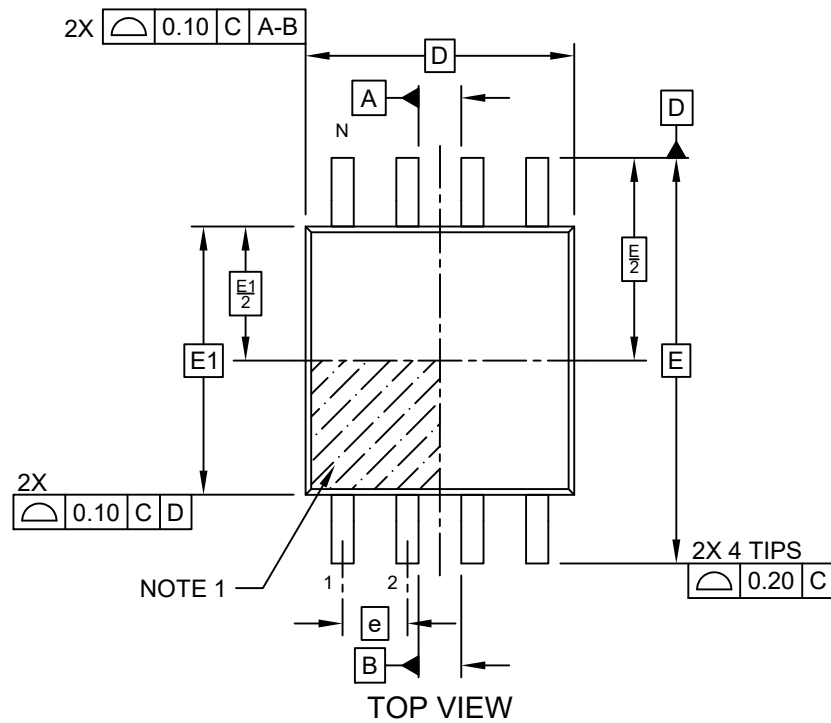

## 8-Lead Plastic Small Outline (SM) - Medium, 5.28 mm (.208 Inch) Body [SOIJ]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

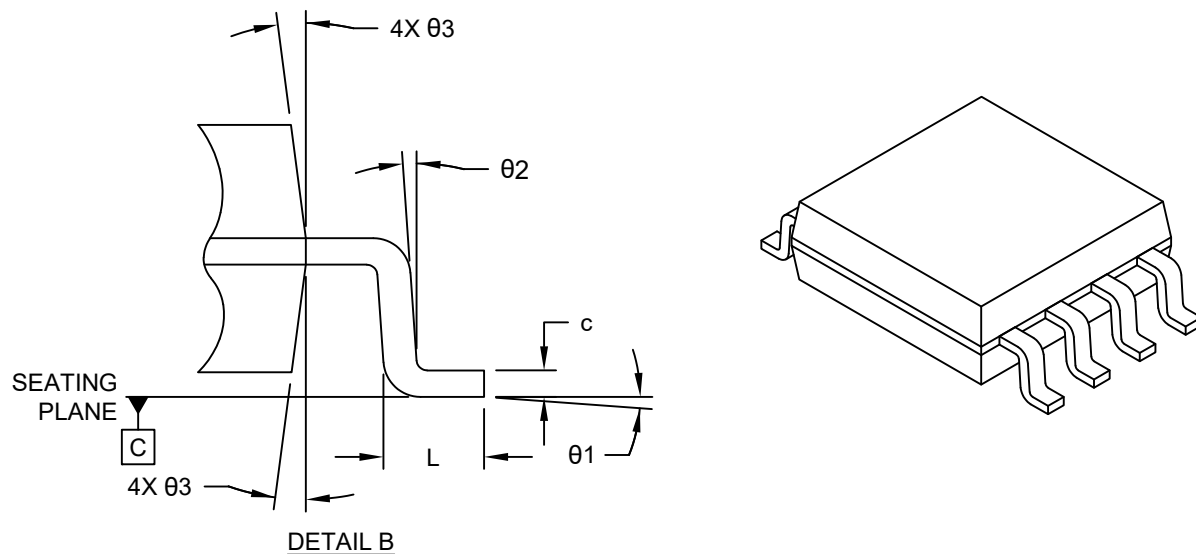


| Dimension Limits         | Units | MILLIMETERS |     |      |
|--------------------------|-------|-------------|-----|------|
|                          |       | MIN         | NOM | MAX  |
| Number of Terminals      | N     | 8           |     |      |
| Pitch                    | e     | 1.27 BSC    |     |      |
| Overall Height           | A     | 1.77        | –   | 2.03 |
| Standoff §               | A1    | 0.05        | –   | 0.25 |
| Molded Package Thickness | A2    | 1.75        | –   | 1.98 |
| Overall Length           | D     | 5.26 BSC    |     |      |
| Overall Width            | E     | 7.94 BSC    |     |      |
| Molded Package Width     | E1    | 5.25 BSC    |     |      |
| Terminal Width           | b     | 0.36        | –   | 0.51 |
| Terminal Thickness       | c     | 0.15        | –   | 0.25 |
| Terminal Length          | L     | 0.51        | –   | 0.76 |
| Foot Angle               | Ø1    | 0°          | –   | 8°   |
| Lead Angle               | Ø2    | 0°          | –   | –    |
| Mold Draft Angle         | Ø3    | –           | –   | 15°  |

### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- SOIJ – JEITA/EIAJ Standard, Formerly called SOIC
- § – Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

## 8-Lead Plastic Small Outline (SM) - Medium, 5.28 mm (.208 Inch) Body [SOIJ]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

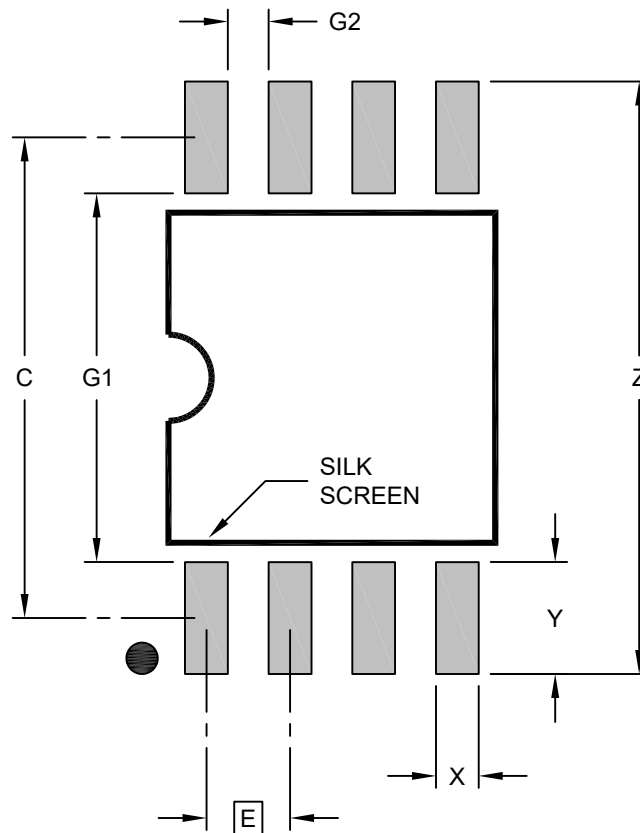

### RECOMMENDED LAND PATTERN

| Units                           |    | MILLIMETERS |      |      |
|---------------------------------|----|-------------|------|------|
| Dimension Limits                |    | MIN         | NOM  | MAX  |
| Contact Pitch                   | E  | 1.27 BSC    |      |      |
| Overall Width                   | Z  |             |      | 9.00 |
| Contact Pad Spacing             | C  |             | 7.30 |      |
| Contact Pad Width (X8)          | X  |             |      | 0.65 |
| Contact Pad Length (X8)         | Y  |             |      | 1.70 |
| Contact Pad to Contact Pad (X4) | G1 | 5.60        |      |      |
| Contact Pad to Contact Pad (X6) | G2 | 0.62        |      |      |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2056 Rev E