



208-Lead Metric Plastic Quad Flat Pack (BMX) - 28x28x3.40mm Body [MQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

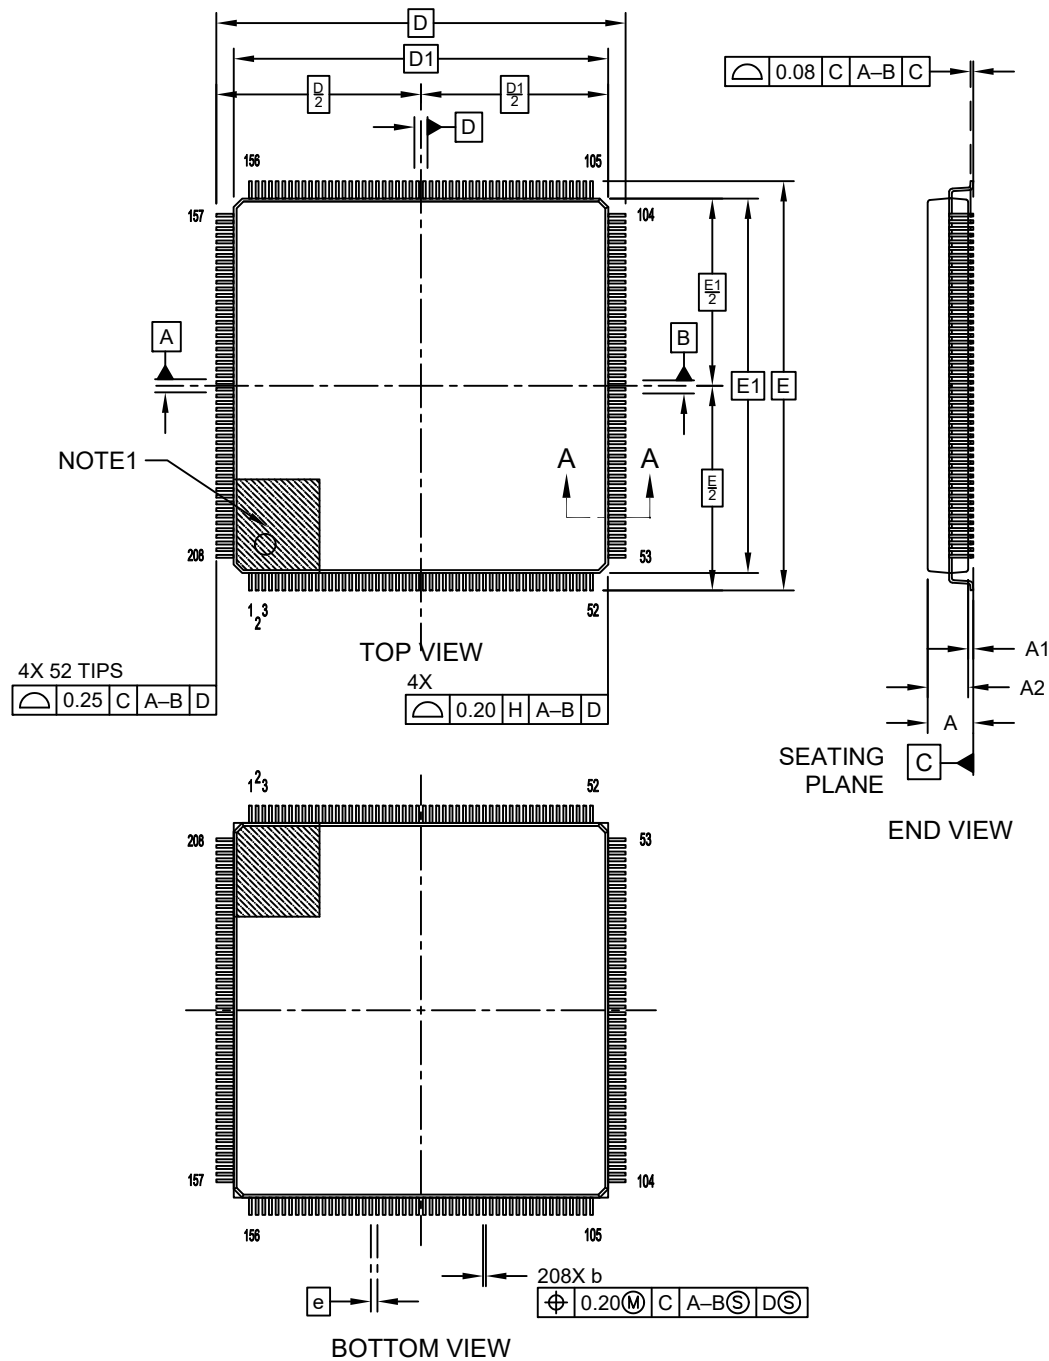

208-Lead Metric Plastic Quad Flat Pack (BMX) - 28x28x3.40mm Body [MQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

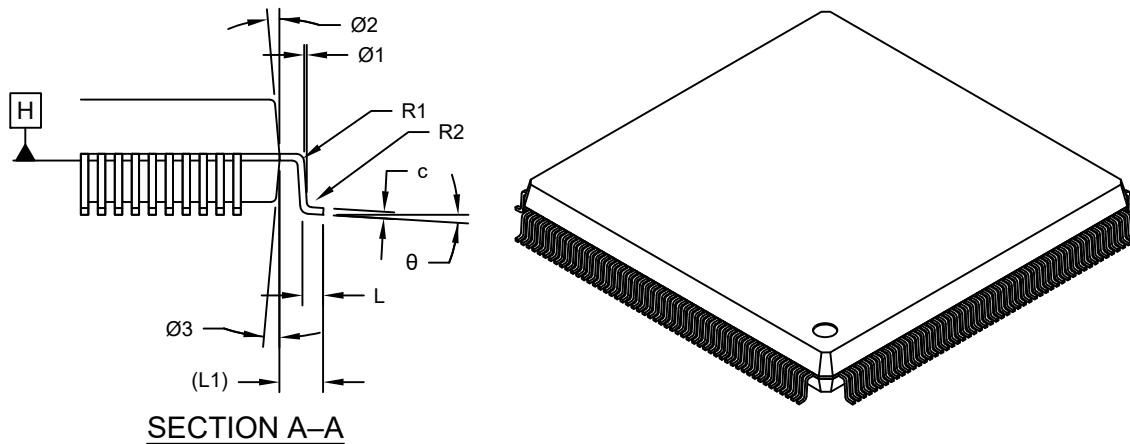


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	208		
Pitch	e	0.50 BSC		
Overall Height	A	-	-	4.10
Standoff	A1	0.25	-	0.50
Molded Package Thickness	A2	3.20	3.40	3.60
Overall Length	D	30.60 BSC		
Molded Package Length	D1	28.00 BSC		
Overall Width	E	30.60 BSC		
Molded Package Width	E1	28.00 BSC		
Terminal Width	b	0.17	0.22	0.27
Terminal Thickness	c	0.09	-	0.20
Terminal Length	L	0.45	0.60	0.75
Footprint	L1	1.30 REF		
Lead Bend Radius	R1	0.08	-	-
Lead Bend Radius	R2	0.08	-	0.25
Foot Angle	θ	0°	-	7°
Lead Angle	θ1	0°	-	-
Mold Draft Angle	θ2	5°	-	16°
Mold Draft Angle	θ3	5°	-	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

208-Lead Metric Plastic Quad Flat Pack (BMX) - 28x28x3.40mm Body [MQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

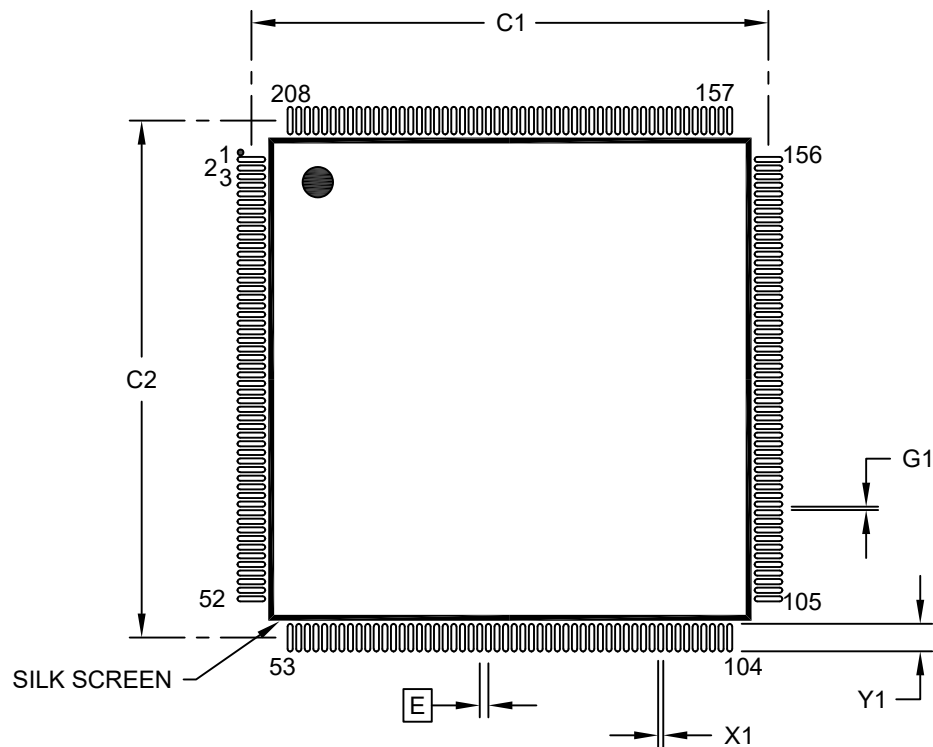

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		30.00	
Contact Pad Spacing	C2		30.00	
Contact Pad Width (X208)	X1			0.30
Contact Pad Length (X208)	Y1			1.60
Contact Pad to Contact Pad (X204)	G1	0.20		


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2069-BMX Rev A


208-Lead Metric Plastic Quad Flat Pack (E9X) - 28x28x3.40mm Body [MQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

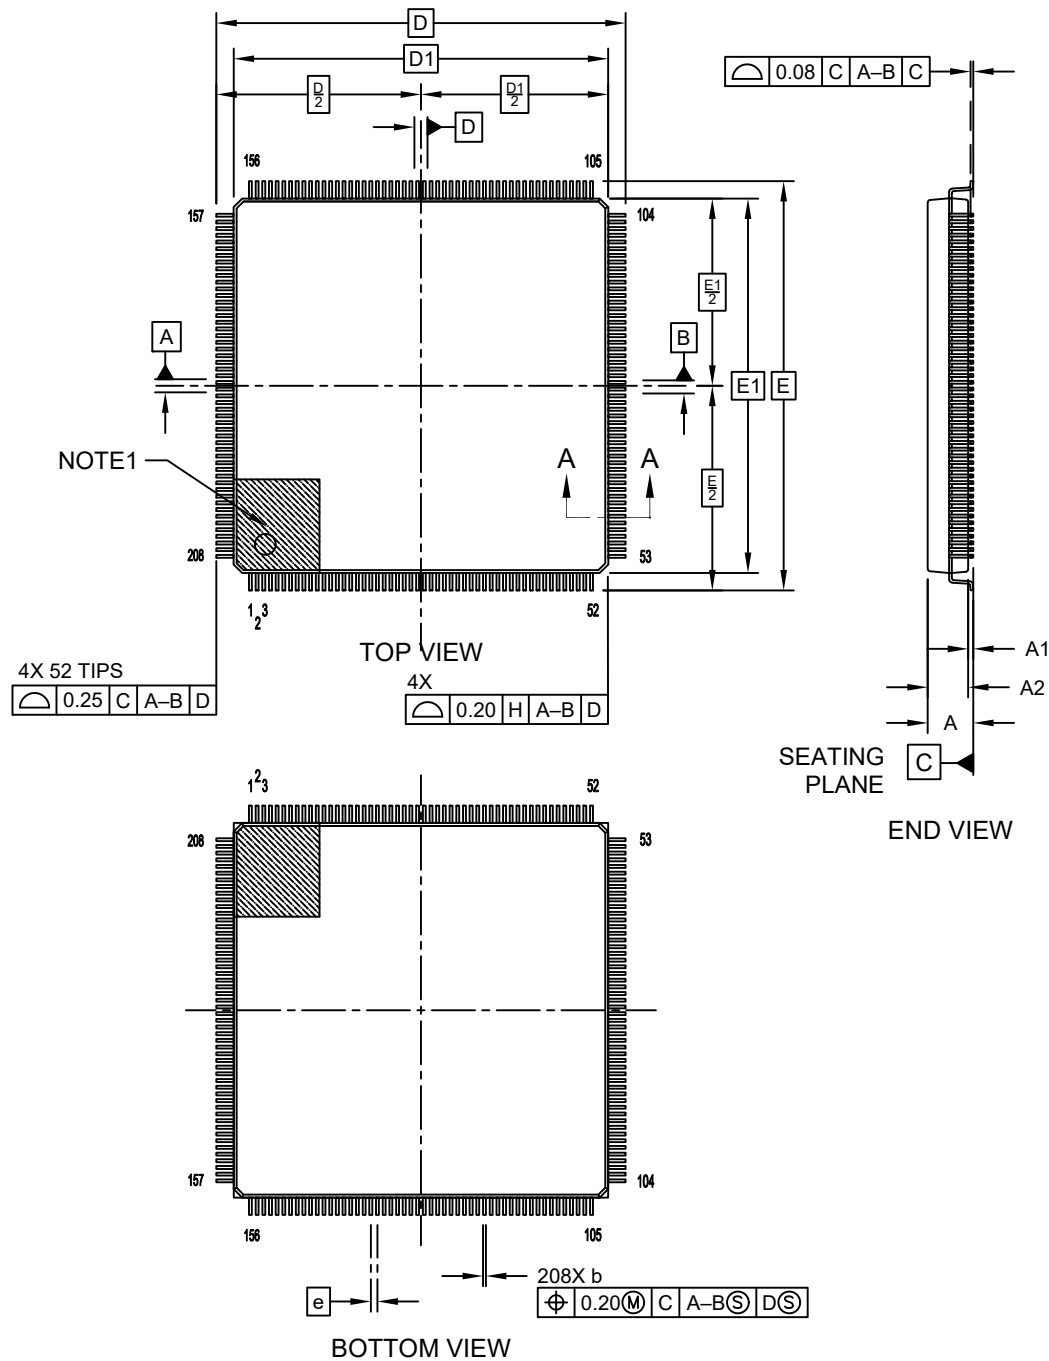

208-Lead Metric Plastic Quad Flat Pack (E9X) - 28x28x3.40mm Body [MQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

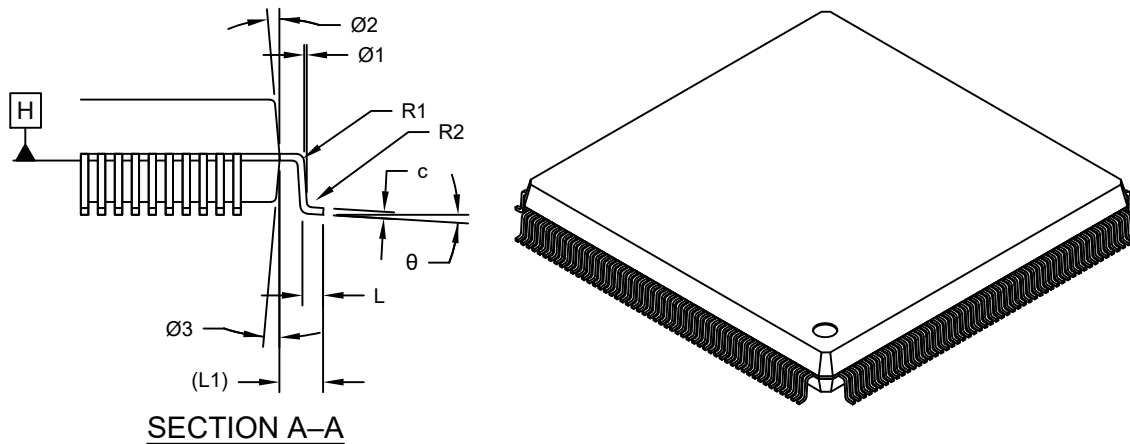


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Number of Terminals	N	208		
Pitch	e	0.50 BSC		
Overall Height	A	-	-	4.10
Standoff	A1	0.25	-	0.50
Molded Package Thickness	A2	3.20	3.40	3.60
Overall Length	D	30.60 BSC		
Molded Package Length	D1	28.00 BSC		
Overall Width	E	30.60 BSC		
Molded Package Width	E1	28.00 BSC		
Terminal Width	b	0.17	0.22	0.27
Terminal Thickness	c	0.09	-	0.20
Terminal Length	L	0.45	0.60	0.75
Footprint	L1	1.30 REF		
Lead Bend Radius	R1	0.08	-	-
Lead Bend Radius	R2	0.08	-	0.25
Foot Angle	θ	0°	-	7°
Lead Angle	θ1	0°	-	-
Mold Draft Angle	θ2	5°	-	16°
Mold Draft Angle	θ3	5°	-	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

208-Lead Metric Plastic Quad Flat Pack (E9X) - 28x28x3.40mm Body [MQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

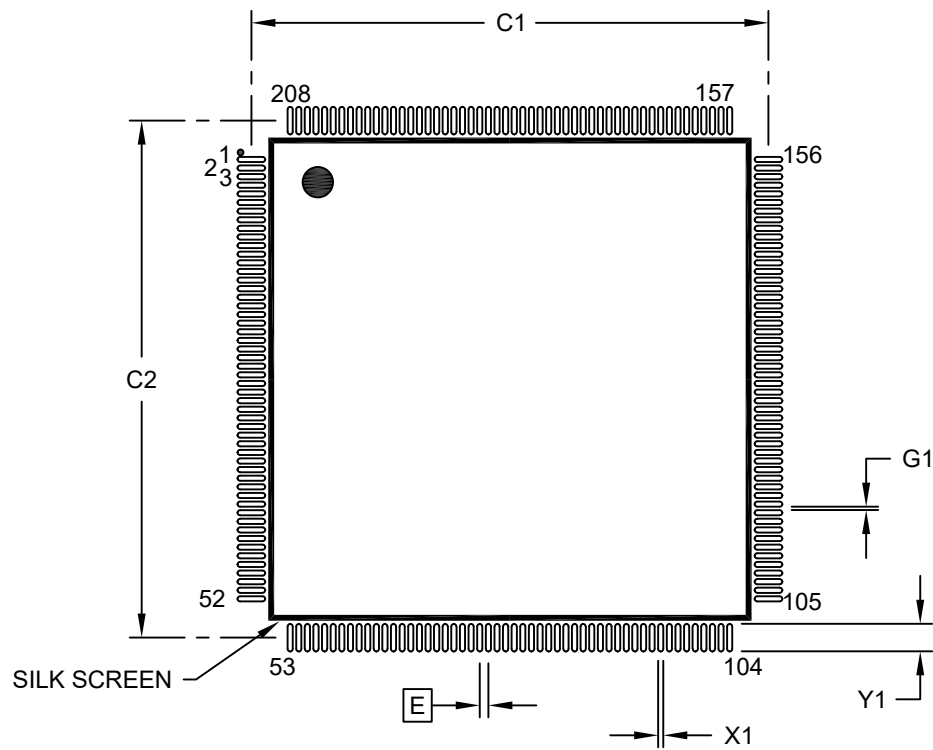

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.50 BSC		
Contact Pad Spacing	C1		30.00	
Contact Pad Spacing	C2		30.00	
Contact Pad Width (X208)	X1			0.30
Contact Pad Length (X208)	Y1			1.60
Contact Pad to Contact Pad (X204)	G1	0.20		

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2069-E9X Rev A