


Packaging Diagrams and Parameters

44-Lead Plastic Metric Quad Flatpack (PQ) - 10x10x2 mm Body, 3.20 mm Footprint [MQFP]

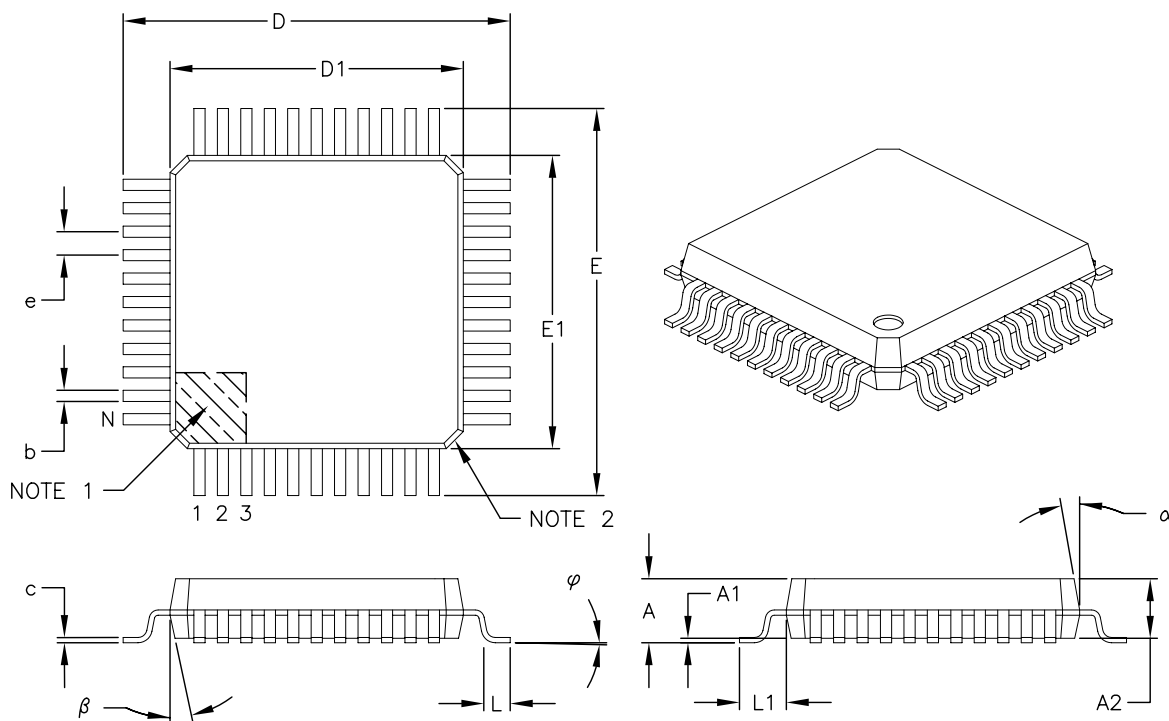


Dimension	Units Limits	MILLIMETERS		
		MIN	NOM	MAX
Number of Leads	N	44		
Lead Pitch	e	0.80 BSC		
Overall Height	A	—	—	2.45
Molded Package Thickness	A2	1.80	2.00	2.20
Standoff §	A1	0.00	—	0.25
Foot Length	L	0.73	0.88	1.03
Footprint	L1	1.60 REF		
Foot Angle	φ	0°	—	7°
Overall Width	E	13.20 BSC		
Overall Length	D	13.20 BSC		
Molded Package Width	E1	10.00 BSC		
Molded Package Length	D1	10.00 BSC		
Lead Thickness	c	0.11	—	0.23
Lead Width	b	0.29	—	0.45
Mold Draft Angle Top	α	5°	—	16°
Mold Draft Angle Bottom	β	5°	—	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.
- § Significant Characteristic

44-Lead Plastic Metric Quad Flatpack (PQ) - 10x10x2 mm Body, 3.20 mm Footprint [MQFP]

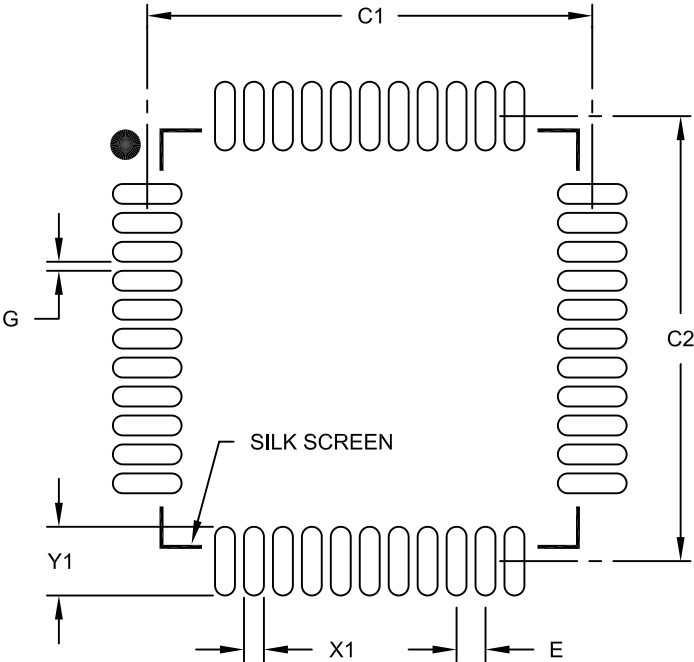

RECOMMENDED LAND PATTERN


Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		12.30	
Contact Pad Spacing	C2		12.30	
Contact Pad Width (X44)	X1			0.55
Contact Pad Length (X44)	Y1			1.90
Distance Between Pads	G	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Packaging Diagrams and Parameters

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2 mm Bodv. 3.20 mm Footprint [MQFP]

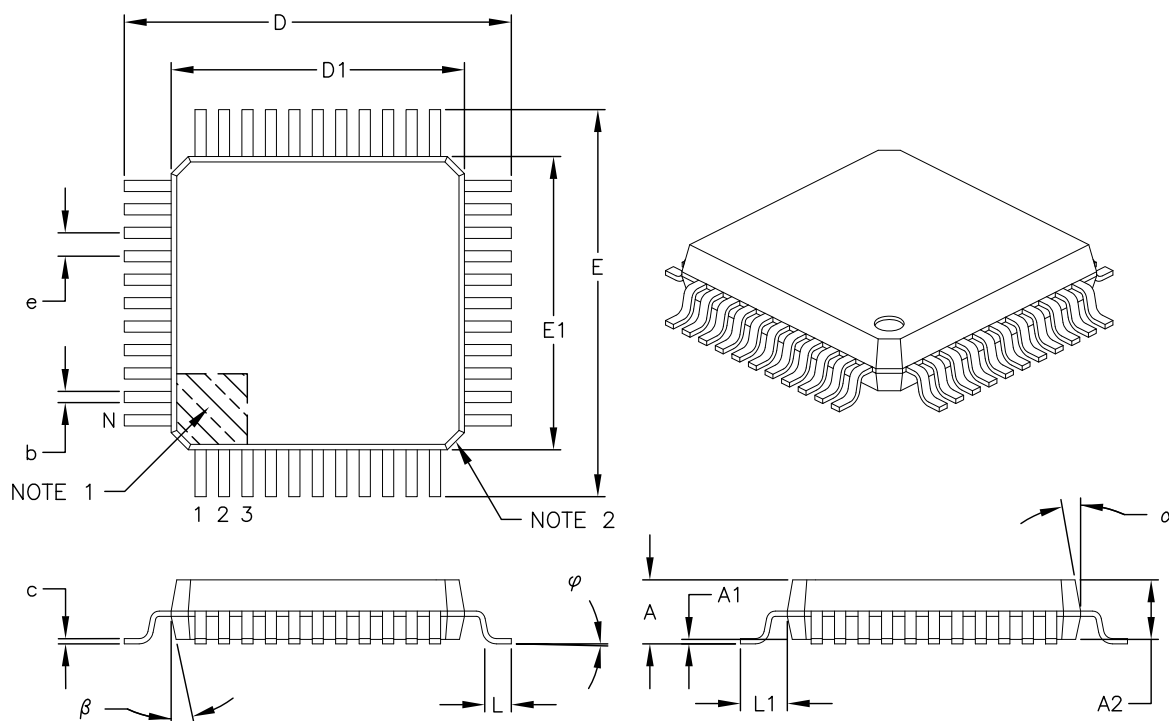


Units		MILLIMETERS		
Dimension	Limits	MIN	NOM	MAX
Number of Leads	N	44		
Lead Pitch	e	0.80 BSC		
Overall Height	A	—	—	2.45
Molded Package Thickness	A2	1.80	2.00	2.20
Standoff §	A1	0.00	—	0.25
Foot Length	L	0.73	0.88	1.03
Footprint	L1	1.60 REF		
Foot Angle	φ	0°	—	7°
Overall Width	E	13.20 BSC		
Overall Length	D	13.20 BSC		
Molded Package Width	E1	10.00 BSC		
Molded Package Length	D1	10.00 BSC		
Lead Thickness	c	0.11	—	0.23
Lead Width	b	0.29	—	0.45
Mold Draft Angle Top	α	5°	—	16°
Mold Draft Angle Bottom	β	5°	—	16°

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Chamfers at corners are optional; size may vary.
- Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.
- § Significant Characteristic

44-Lead Plastic Metric Quad Flatpack (KW) - 10x10x2 mm Body, 3.20 mm Footprint [MQFP]

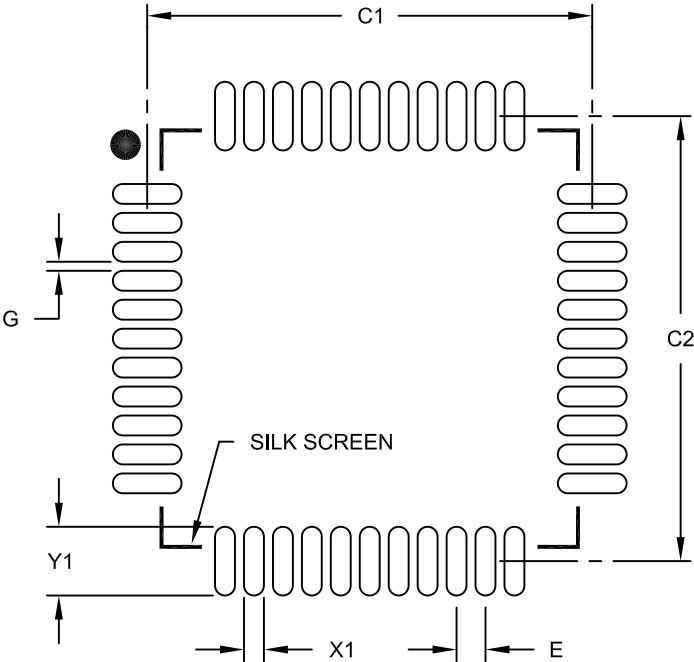

RECOMMENDED LAND PATTERN

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.80 BSC		
Contact Pad Spacing	C1		12.30	
Contact Pad Spacing	C2		12.30	
Contact Pad Width (X44)	X1			0.55
Contact Pad Length (X44)	Y1			1.90
Distance Between Pads	G	0.25		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.