


## Packaging Diagrams and Parameters

### 28-Lead Plastic Dual In-Line (P) - 600 mil Body [PDIP]

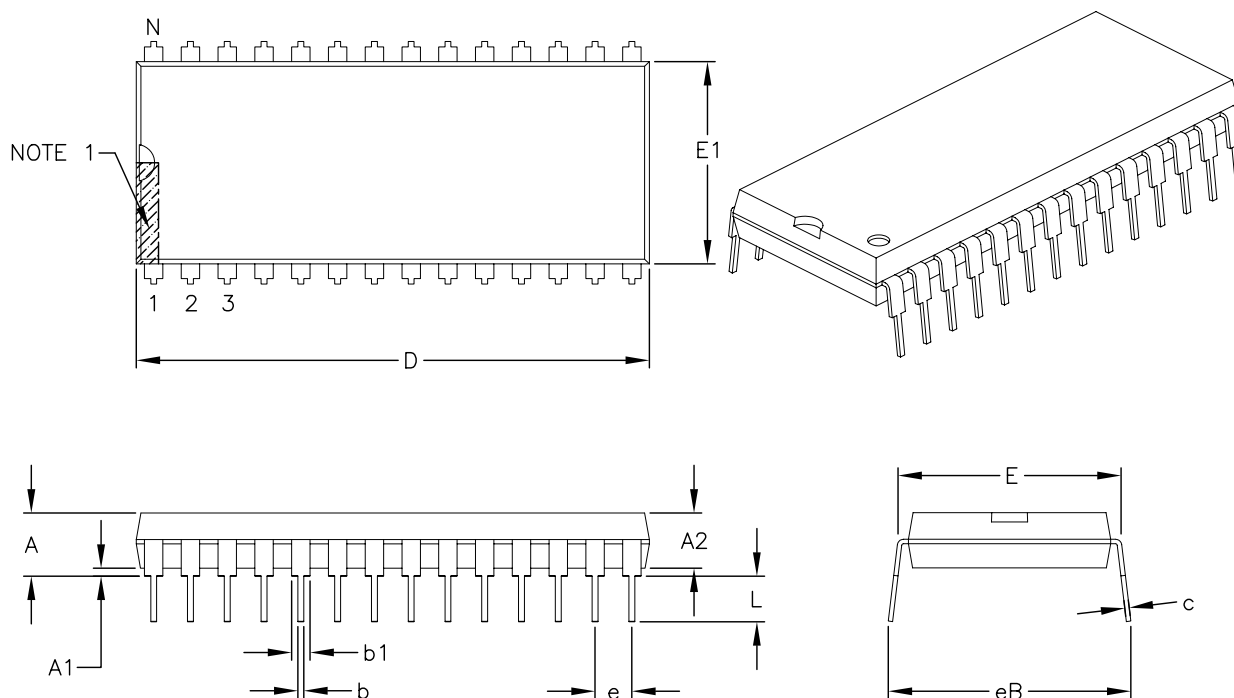


| Dimension                  | Units<br>Limits | INCHES   |     |       |
|----------------------------|-----------------|----------|-----|-------|
|                            |                 | MIN      | NOM | MAX   |
| Number of Pins             | N               | 28       |     |       |
| Pitch                      | e               | .100 BSC |     |       |
| Top to Seating Plane       | A               | —        | —   | .250  |
| Molded Package Thickness   | A2              | .125     | —   | .195  |
| Base to Seating Plane      | A1              | .015     | —   | —     |
| Shoulder to Shoulder Width | E               | .590     | —   | .625  |
| Molded Package Width       | E1              | .485     | —   | .580  |
| Overall Length             | D               | 1.380    | —   | 1.565 |
| Tip to Seating Plane       | L               | .115     | —   | .200  |
| Lead Thickness             | c               | .008     | —   | .015  |
| Upper Lead Width           | b1              | .030     | —   | .070  |
| Lower Lead Width           | b               | .014     | —   | .022  |
| Overall Row Spacing        | § eB            | —        | —   | .700  |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.

## Packaging Diagrams and Parameters

### 28-Lead Plastic Dual In-Line (PI) - 600 mil Body [PDIP]

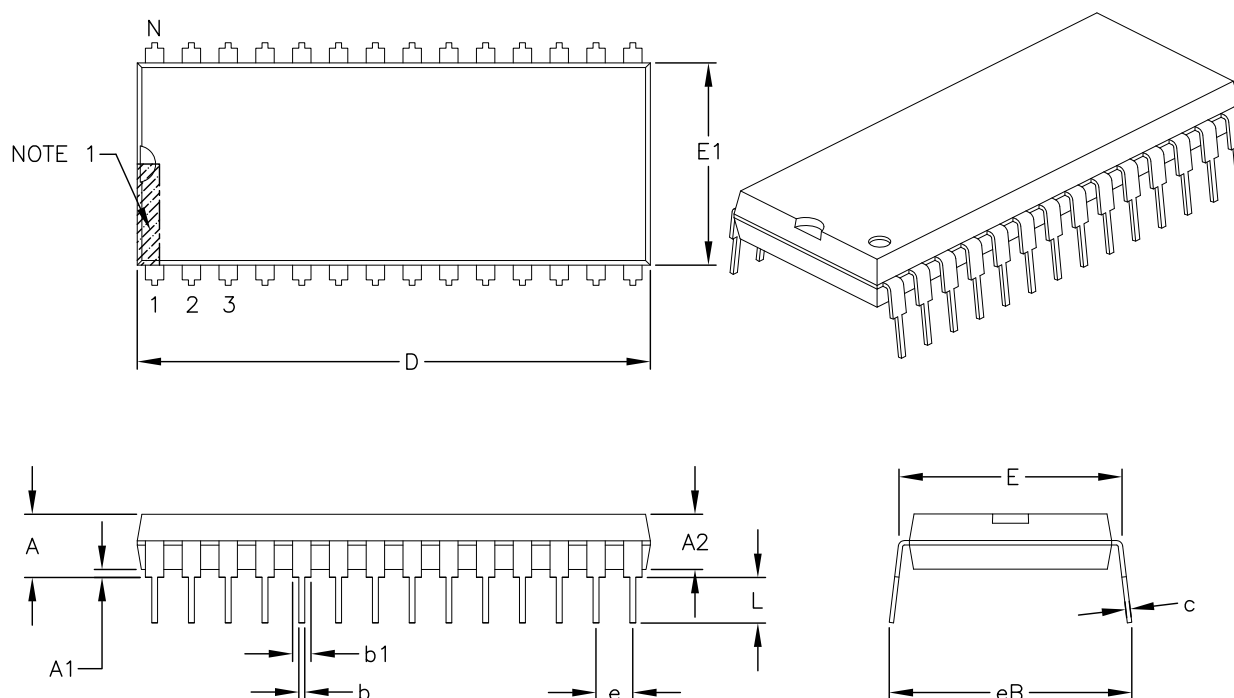

| Dimension                  | Units | INCHES   |     |       |
|----------------------------|-------|----------|-----|-------|
|                            |       | MIN      | NOM | MAX   |
| Number of Pins             | N     | 28       |     |       |
| Pitch                      | e     | .100 BSC |     |       |
| Top to Seating Plane       | A     | —        | —   | .250  |
| Molded Package Thickness   | A2    | .125     | —   | .195  |
| Base to Seating Plane      | A1    | .015     | —   | —     |
| Shoulder to Shoulder Width | E     | .590     | —   | .625  |
| Molded Package Width       | E1    | .485     | —   | .580  |
| Overall Length             | D     | 1.380    | —   | 1.565 |
| Tip to Seating Plane       | L     | .115     | —   | .200  |
| Lead Thickness             | c     | .008     | —   | .015  |
| Upper Lead Width           | b1    | .030     | —   | .070  |
| Lower Lead Width           | b     | .014     | —   | .022  |
| Overall Row Spacing        | § eB  | —        | —   | .700  |

#### Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.