


24-Lead Plastic Dual In-Line (P) - 600 mil Body [PDIP]

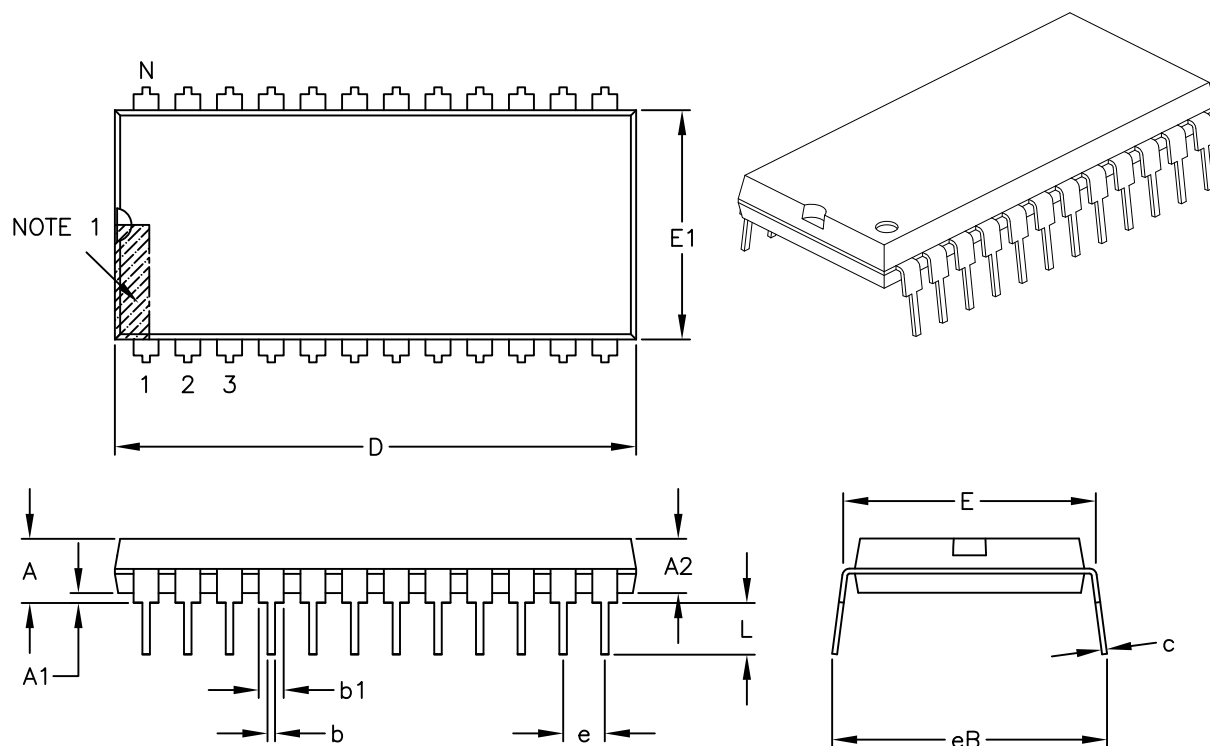


Dimension	Units	INCHES		
		MIN	NOM	MAX
Number of Pins	N	24		
Pitch	e	.100 BSC		
Top to Seating Plane	A	—	—	.250
Molded Package Thickness	A2	.125	—	.195
Base to Seating Plane	A1	.015	—	—
Shoulder to Shoulder Width	E	.590	—	.625
Molded Package Width	E1	.485	—	.580
Overall Length	D	1.150	—	1.290
Tip to Seating Plane	L	.115	—	.200
Lead Thickness	c	.008	—	.015
Upper Lead Width	b1	.030	—	.070
Lower Lead Width	b	.014	—	.022
Overall Row Spacing	§ eB	—	—	.700

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

24-Lead Plastic Dual In-Line (PG) - 600 mil Body [PDIP]

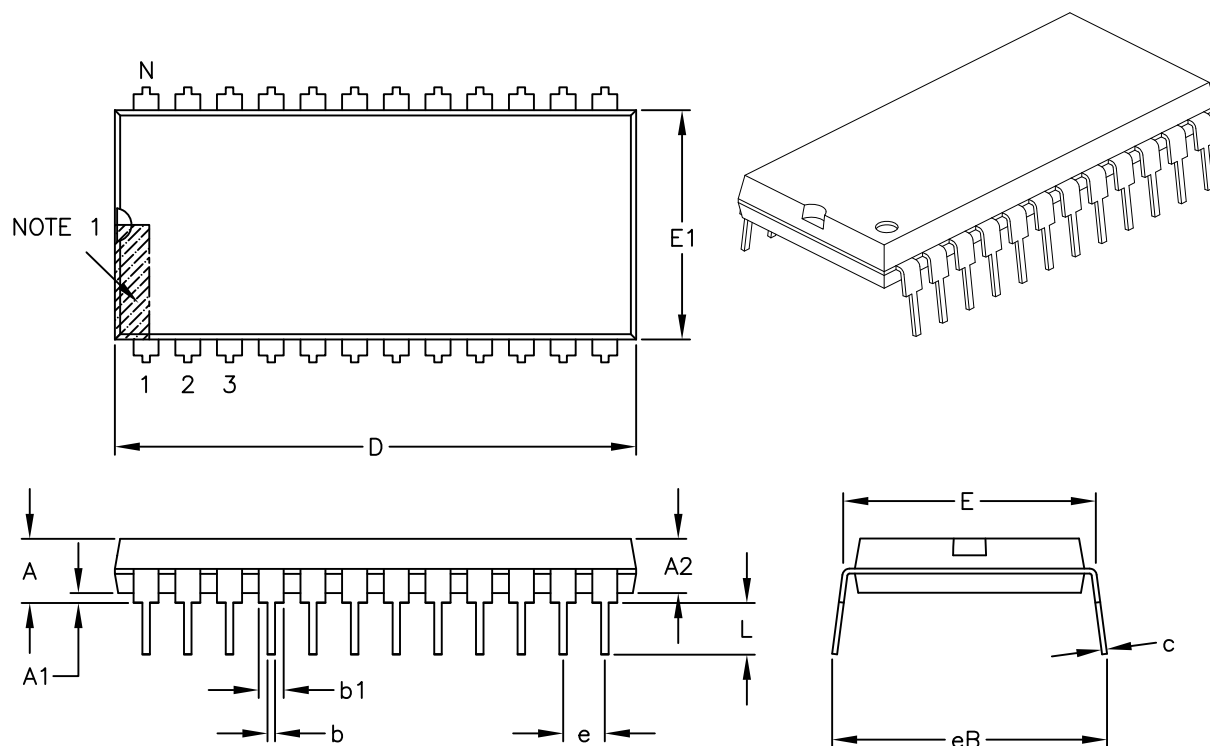

Dimension	Units	INCHES		
		MIN	NOM	MAX
Number of Pins	N	24		
Pitch	e	.100 BSC		
Top to Seating Plane	A	—	—	.250
Molded Package Thickness	A2	.125	—	.195
Base to Seating Plane	A1	.015	—	—
Shoulder to Shoulder Width	E	.590	—	.625
Molded Package Width	E1	.485	—	.580
Overall Length	D	1.150	—	1.290
Tip to Seating Plane	L	.115	—	.200
Lead Thickness	c	.008	—	.015
Upper Lead Width	b1	.030	—	.070
Lower Lead Width	b	.014	—	.022
Overall Row Spacing	§ eB	—	—	.700

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.