


## Packaging Diagrams and Parameters

### 8-Lead Ceramic Side Brazed Dual In-Line with Window (JW) - .300" Body

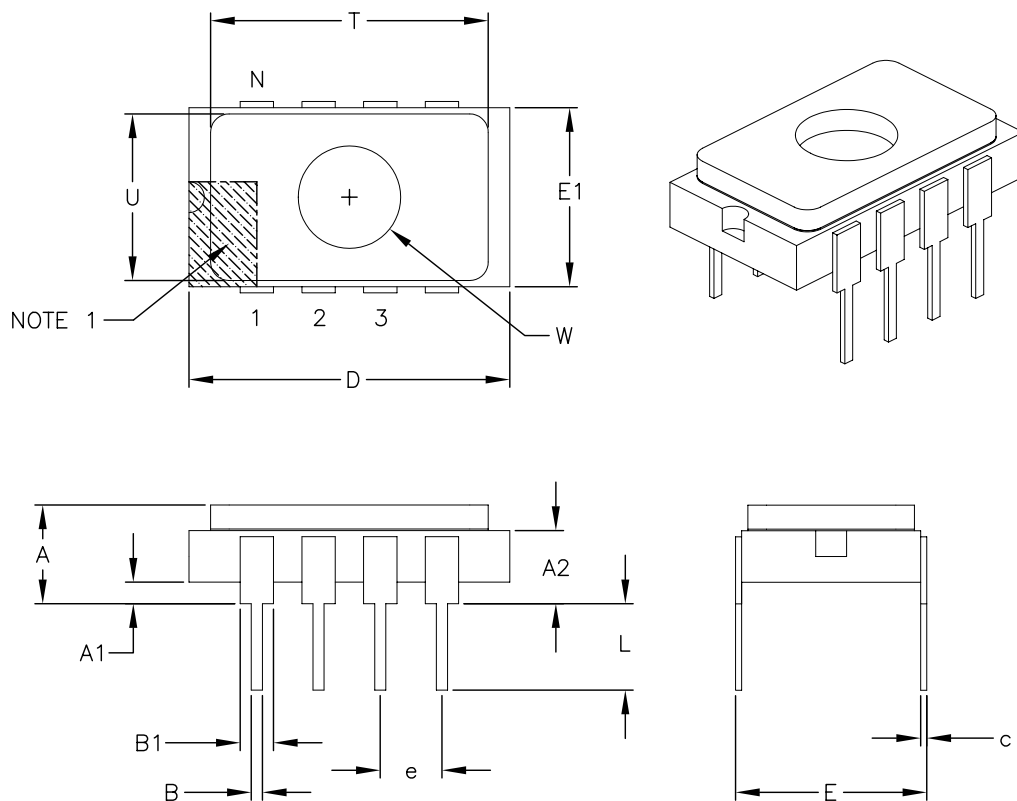

| Dimension                    | Units<br>Limits | INCHES   |     |      |
|------------------------------|-----------------|----------|-----|------|
|                              |                 | MIN      | NOM | MAX  |
| Number of Pins               | N               | 8        |     |      |
| Pitch                        | e               | .100 BSC |     |      |
| Top to Seating Plane         | A               | .085     | —   | .200 |
| Top of Body to Seating Plane | A2              | .103     | —   | .143 |
| Standoff                     | A1              | .025     | —   | .070 |
| Package Width                | E1              | .280     | —   | .310 |
| Overall Length               | D               | .500     | —   | .540 |
| Tip to Seating Plane         | L               | .125     | —   | .200 |
| Lead Thickness               | c               | .008     | —   | .015 |
| Upper Lead Width             | B1              | .045     | —   | .065 |
| Lower Lead Width             | B               | .015     | —   | .022 |
| Overall Row Spacing §        | E               | .300     | —   | .325 |
| Window Diameter              | W               | .161     | —   | .171 |
| Lid Length                   | T               | .440     | —   | .460 |
| Lid Width                    | U               | .260     | —   | .280 |

**Notes:**

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include burrs and/or projections of package material. These particles shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.