


Packaging Diagrams and Parameters

28-Lead Ceramic Side Brazed Dual In-Line with Window (JW) - .300" Body

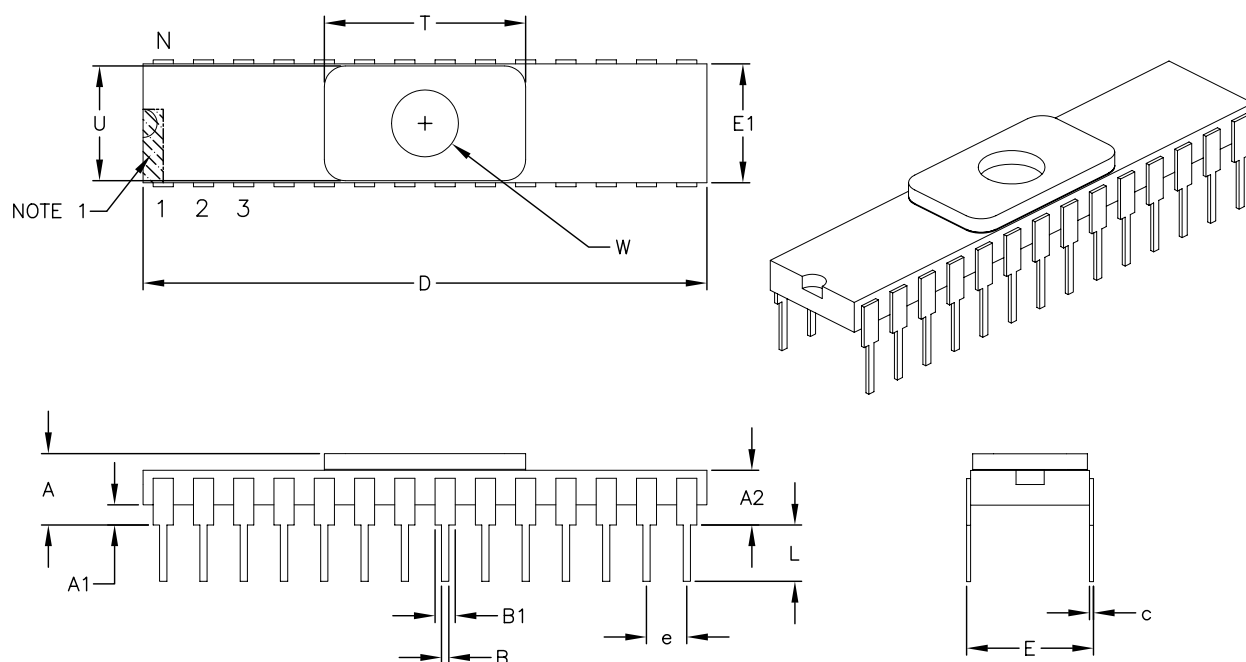

Dimension	Units Limits	INCHES		
		MIN	NOM	MAX
Number of Pins	N	28		
Pitch	e	.100 BSC		
Top to Seating Plane	A	.085	—	.200
Top of Body to Seating Plane	A2	.115	—	.155
Standoff	A1	.025	—	.070
Package Width	E1	.280	—	.310
Overall Length	D	1.380	—	1.420
Tip to Seating Plane	L	.125	—	.200
Lead Thickness	c	.008	—	.015
Upper Lead Width	B1	.045	—	.065
Lower Lead Width	B	.015	—	.022
Overall Row Spacing §	E	.300	—	.325
Window Diameter	W	.161	—	.171
Lid Length	T	.490	—	.510
Lid Width	U	.275	—	.295

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include burrs and/or projections of package material. These particles shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.