
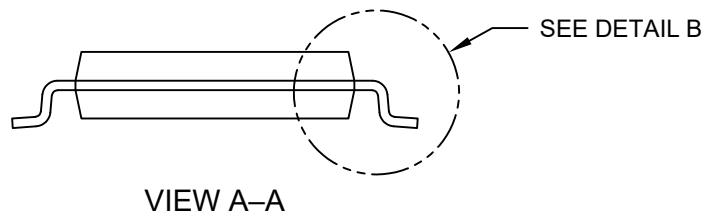
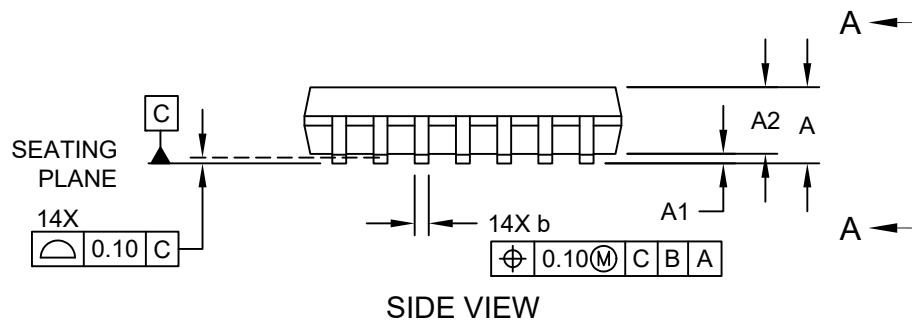



14-Lead Thin Shrink Small Outline Package [ST] – 4.4 mm Body [TSSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

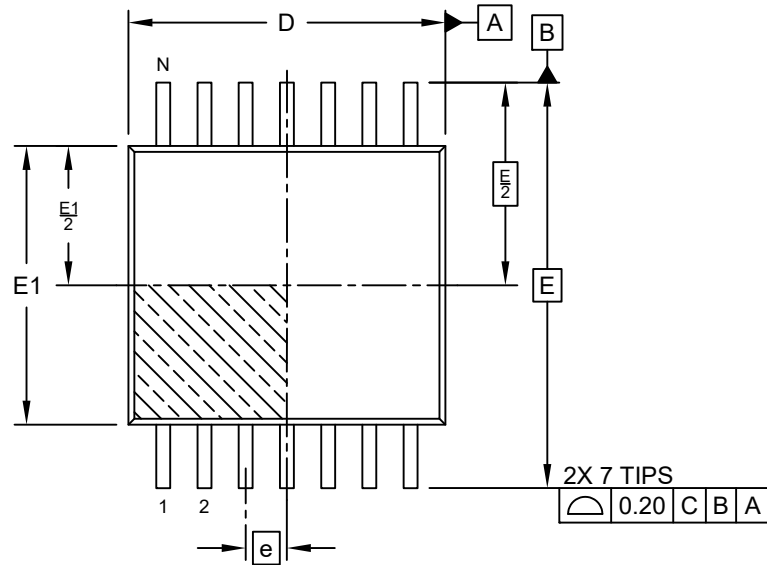

14-Lead Thin Shrink Small Outline Package [ST] – 4.4 mm Body [TSSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

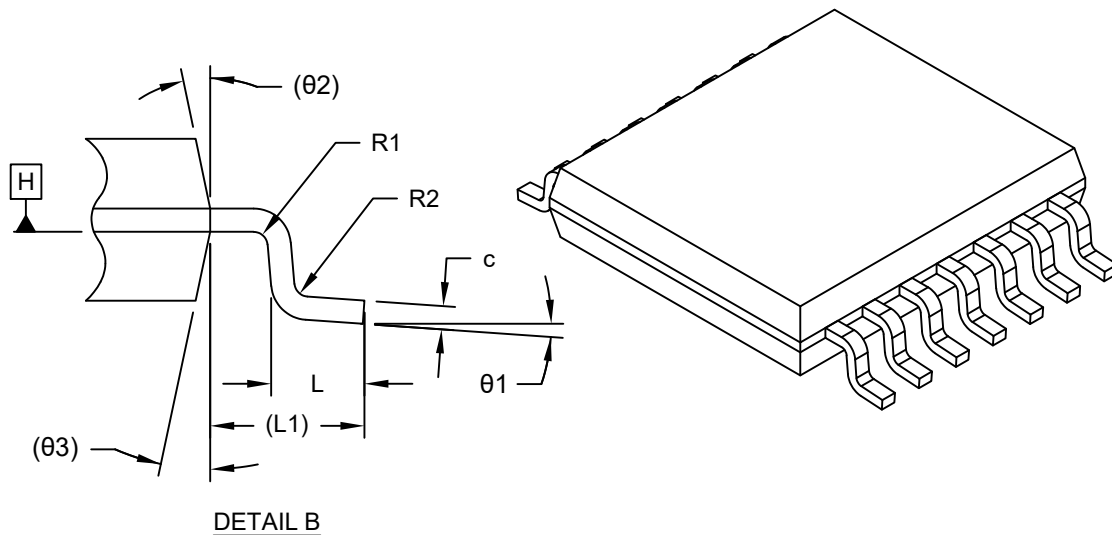


		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Terminals	N		14		
Pitch	e		0.65 BSC		
Overall Height	A		–	–	1.20
Standoff	A1		0.05	–	0.15
Molded Package Thickness	A2		0.80	1.00	1.05
Overall Length	D		4.90	5.00	5.10
Overall Width	E		6.40 BSC		
Molded Package Width	E1		4.30	4.40	4.50
Terminal Width	b		0.19	–	0.30
Terminal Thickness	c		0.09	–	0.20
Terminal Length	L		0.45	0.60	0.75
Footprint	L1		1.00 REF		
Lead Bend Radius	R1		0.09	–	–
Lead Bend Radius	R2		0.09	–	–
Foot Angle	θ1		0°	–	8°
Mold Draft Angle	θ2		–	12° REF	–
Mold Draft Angle	θ3		–	12° REF	–

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

14-Lead Thin Shrink Small Outline Package [ST] – 4.4 mm Body [TSSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

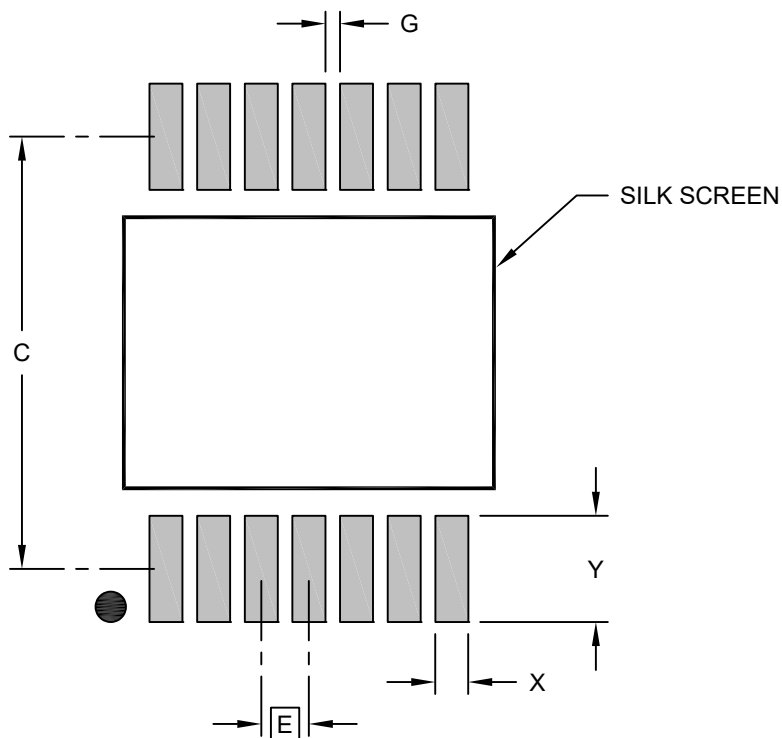

RECOMMENDED LAND PATTERN

Dimension Limits	Units	MILLIMETERS		
		MIN	NOM	MAX
Contact Pitch	E	0.65 BSC		
Contact Pad Spacing	C		5.90	
Contact Pad Width (Xnn)	X			0.45
Contact Pad Length (Xnn)	Y			1.45
Contact Pad to Contact Pad (Xnn)	G	0.20		

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.