


Packaging Diagrams and Parameters

64-Lead Shrink Plastic Dual In-Line (SP) - 750 mil Body [PDIP]

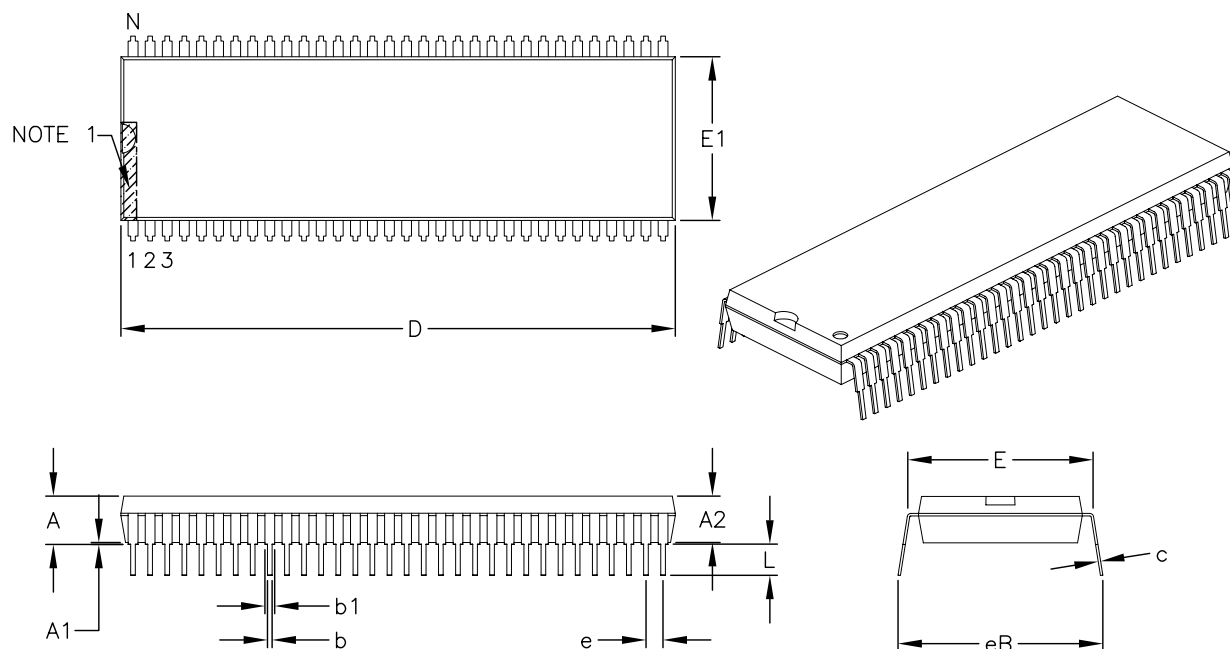

		Units	INCHES		
Dimension		Limits	MIN	NOM	MAX
Number of Pins	N		64		
Pitch	e		.070 BSC		
Top to Seating Plane	A		—	—	.200
Molded Package Thickness	A2		.120	.150	.180
Base to Seating Plane	A1		.020	—	—
Shoulder to Shoulder Width	E		.750	—	.785
Molded Package Width	E1		.650	.670	.690
Overall Length	D		2.260	2.270	2.280
Tip to Seating Plane	L		.100	.130	.150
Lead Thickness	c		.009	.010	.015
Upper Lead Width	b1		.035	.040	.045
Lower Lead Width	b		.014	.018	.022
Overall Row Spacing §	eB		—	—	.880

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .010" per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.