


Packaging Diagrams and Parameters

68-Lead Ceramic Leaded (CL) Chip Carrier with Window - Square [CERQUAD]

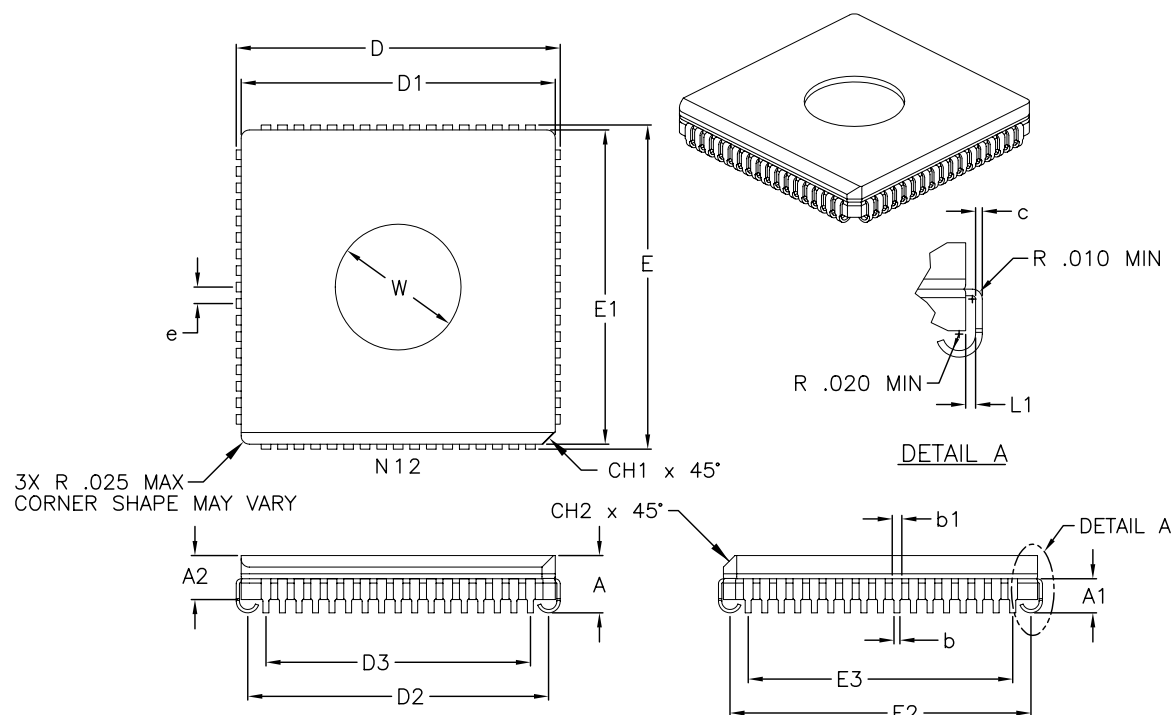


Dimension	Units	INCHES		
		MIN	NOM	MAX
Number of Pins	N	68		
Pitch	e	.050 BSC		
Overall Height	A	.155	.172	.190
Package Thickness	A2	.132 REF		
Lead Height	A1	.090	.100	.120
Side Chamfer	CH2	.035 REF		
Corner Chamfer	CH1	.040 REF		
Overall Package Width	E	.985	.990	.995
Overall Package Length	D	.985	.990	.995
Ceramic Package Width	E1	.930	.950	.965
Ceramic Package Length	D1	.930	.950	.965
Overall Lead Centers	E3	.800 REF		
Overall Lead Centers	D3	.800 REF		
Footprint Width	E2	.880	.910	.940
Footprint Length	D2	.880	.910	.940
Lead Length	L1	.006	—	—
Lead Thickness	c	.006	.007	.010
Upper Lead Width	b1	.026	.029	.032
Lower Lead Width	b	.017	.019	.021
Window Diameter	W	.370	.380	.390

Notes:

- Dimensions D1 and E1 do not include glass protrusion. These protrusions shall not exceed .005" per side.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerances, for information purposes only.

68-Lead Ceramic Leaded (CL) Chip Carrier with Window - Square [CERQUAD]

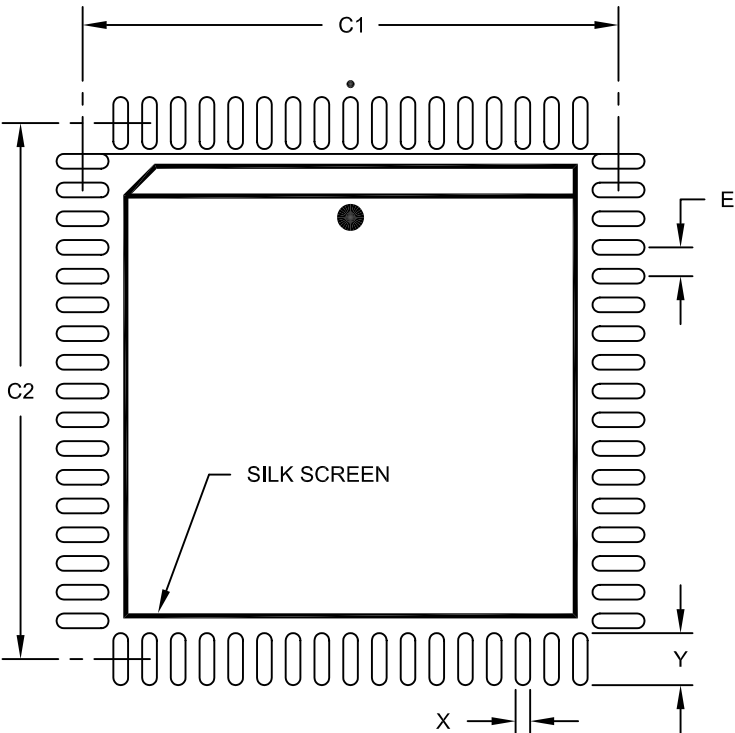

RECOMMENDED LAND PATTERN

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	.050 BSC		
Contact Pad Spacing	C1		.933	
Contact Pad Spacing	C2		.224	
Contact Pad Width	X1			.026
Contact Pad Length	Y1			.091

Notes:

- 1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.