

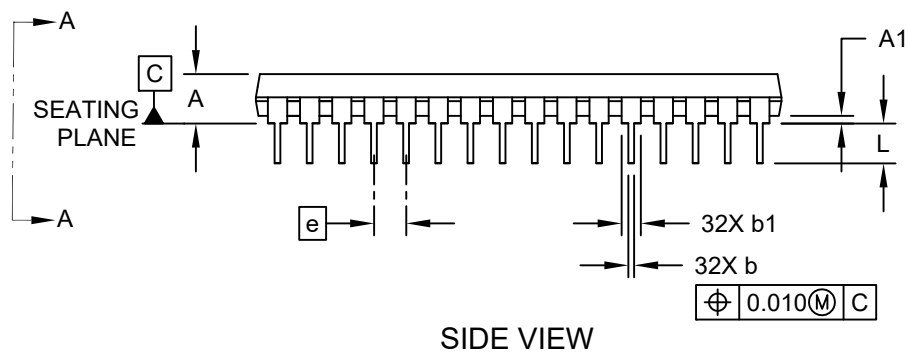



32-Lead Plastic Dual In-Line (PAX) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

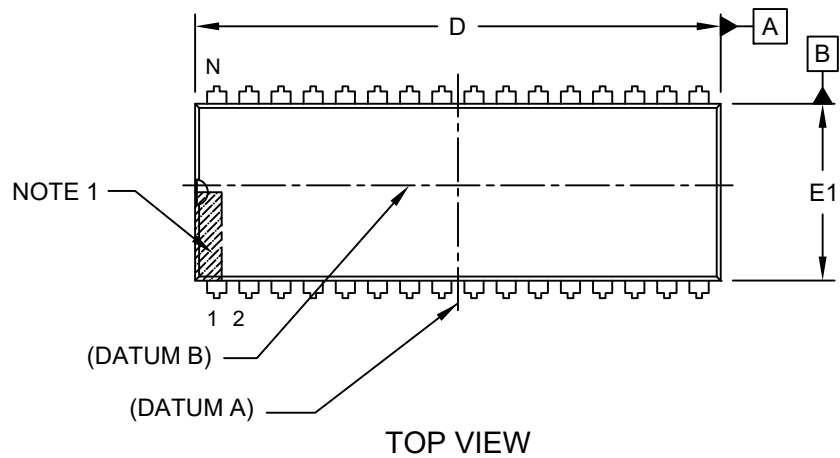

32-Lead Plastic Dual In-Line (PAX) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

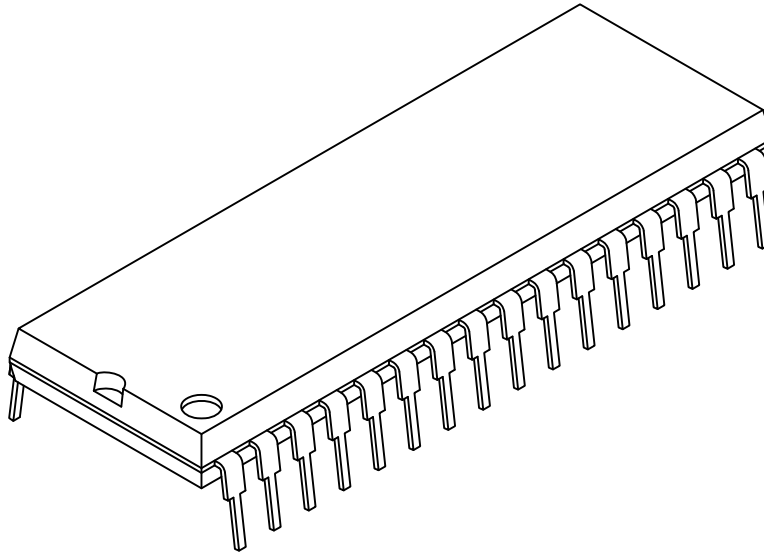

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	32		
Pitch	e	.100 BSC		
Top to Seating Plane	A	.170	-	.200
Base to Seating Plane	A1	.015	-	.050
Shoulder to Shoulder Width	E	.600	-	.625
Molded Package Width	E1	.530	-	.550
Overall Length	D	1.645	-	1.655
Tip to Seating Plane	L	.120	-	.150
Lead Thickness	c	.008	-	.012
Upper Lead Width	b1	.045	-	.065
Lower Lead Width	b	.016	-	.022
Overall Row Spacing §	eB	.600 BSC		

Notes:




1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-106-PAX Rev A Sheet 2 of 2


32-Lead Plastic Dual In-Line (PXX) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

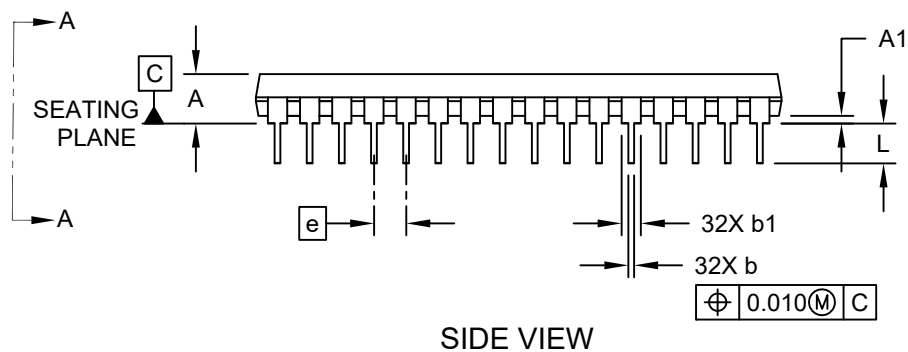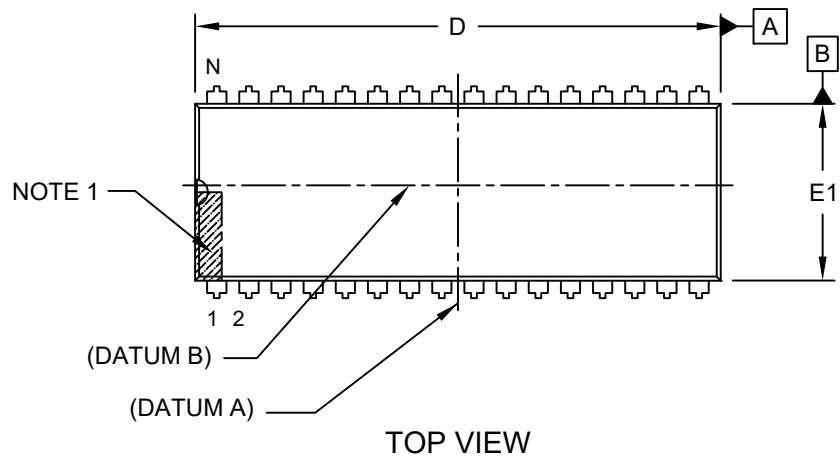

32-Lead Plastic Dual In-Line (PXX) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

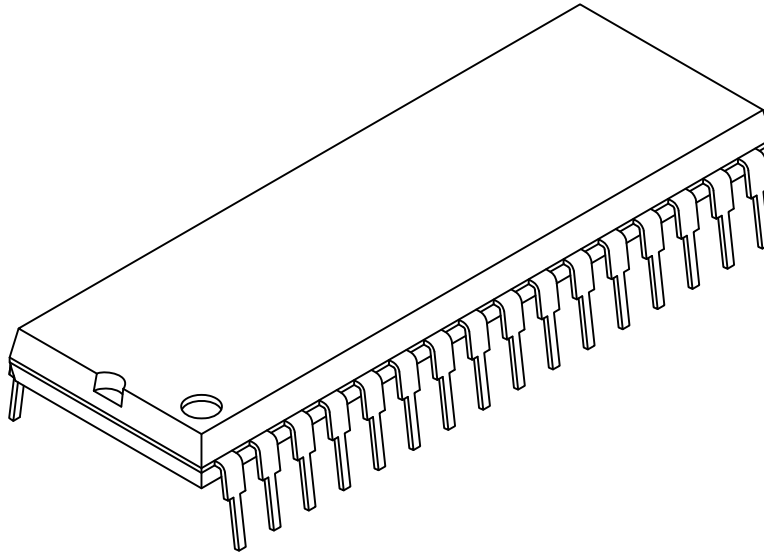

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	32		
Pitch	e	.100 BSC		
Top to Seating Plane	A	.170	-	.200
Base to Seating Plane	A1	.015	-	.050
Shoulder to Shoulder Width	E	.600	-	.625
Molded Package Width	E1	.530	-	.550
Overall Length	D	1.645	-	1.655
Tip to Seating Plane	L	.120	-	.150
Lead Thickness	c	.008	-	.012
Upper Lead Width	b1	.045	-	.065
Lower Lead Width	b	.016	-	.022
Overall Row Spacing §	eB	.600 BSC		

Notes:




1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-106-PXX Rev A Sheet 2 of 2


32-Lead Plastic Dual In-Line (P2X) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

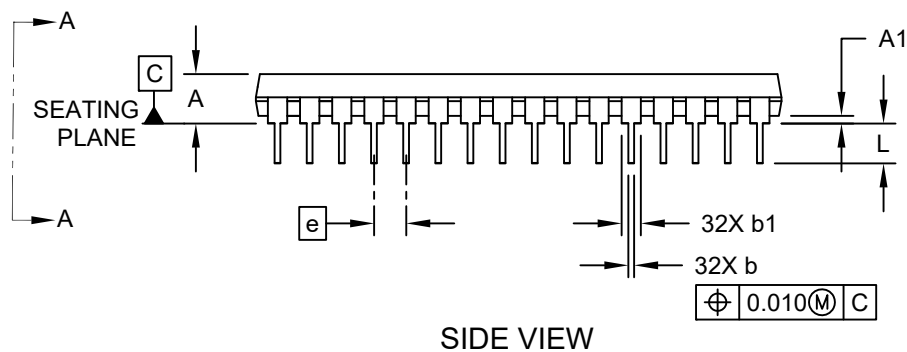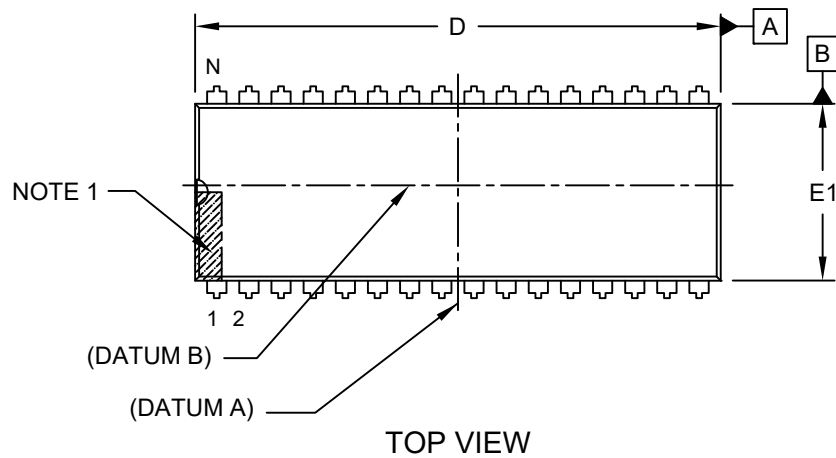

32-Lead Plastic Dual In-Line (P2X) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

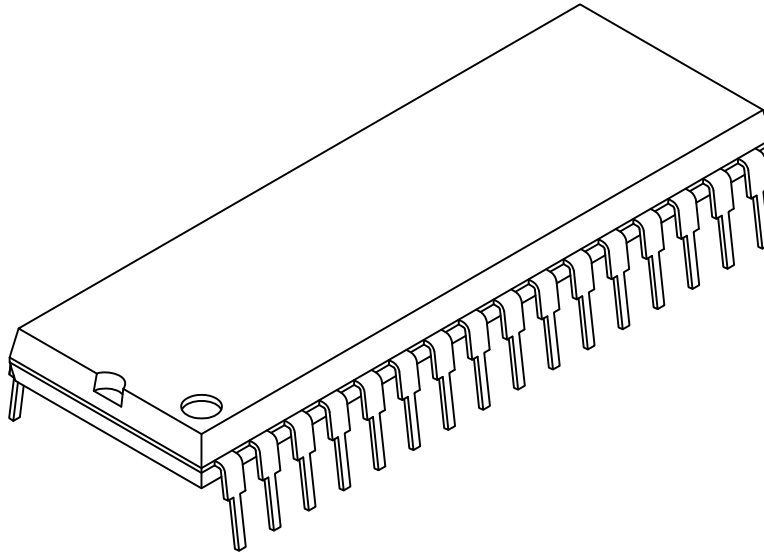

Units		INCHES		
Dimension Limits		MIN	NOM	MAX
Number of Pins	N	32		
Pitch	e	.100 BSC		
Top to Seating Plane	A	.170	-	.200
Base to Seating Plane	A1	.015	-	.050
Shoulder to Shoulder Width	E	.600	-	.625
Molded Package Width	E1	.530	-	.550
Overall Length	D	1.645	-	1.655
Tip to Seating Plane	L	.120	-	.150
Lead Thickness	c	.008	-	.012
Upper Lead Width	b1	.045	-	.065
Lower Lead Width	b	.016	-	.022
Overall Row Spacing §	eB	.600 BSC		

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-106-P2X Rev A Sheet 2 of 2