

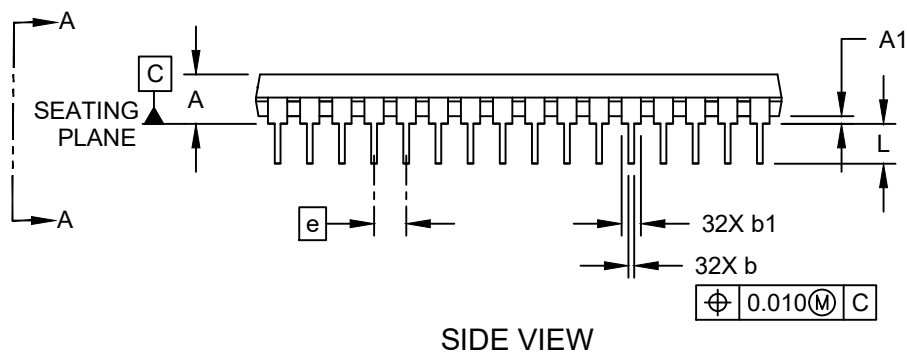


Packaging Diagrams and Parameters

32-Lead Plastic Dual In-Line (P2X) - 600 mil Body [PDIP]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

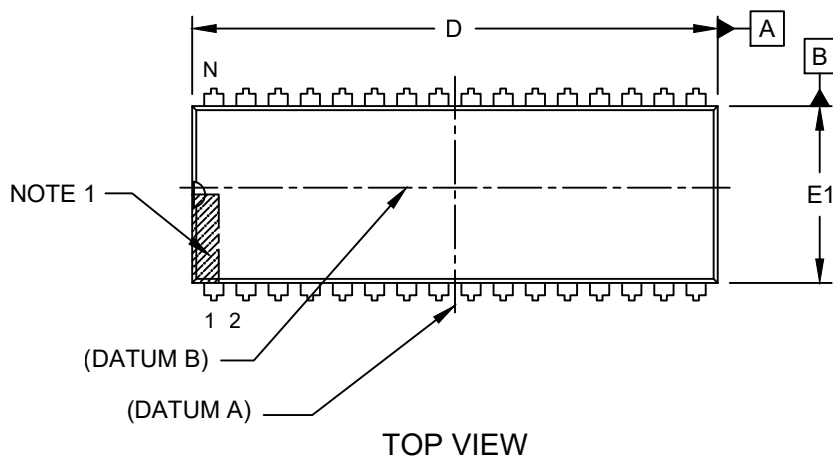

Packaging Diagrams and Parameters

32-Lead Plastic Dual In-Line (P2X) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

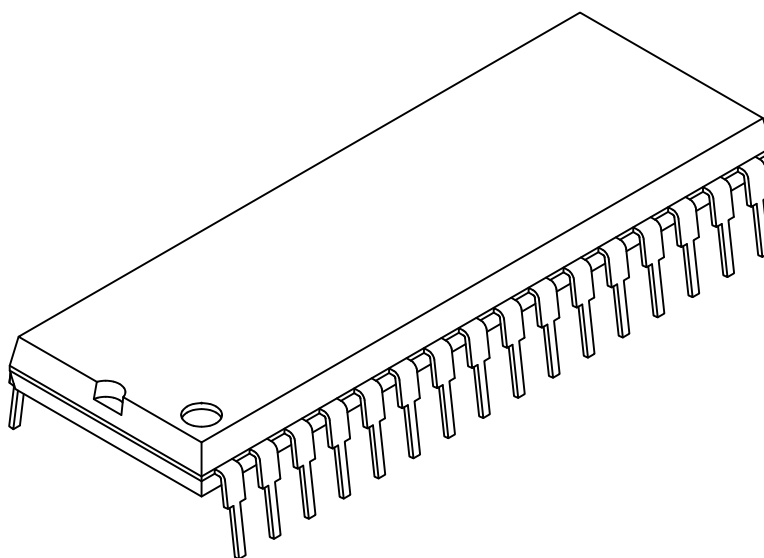

		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		32		
Pitch	e		.100 BSC		
Top to Seating Plane	A		.170	-	.200
Base to Seating Plane	A1		.015	-	.050
Shoulder to Shoulder Width	E		.600	-	.625
Molded Package Width	E1		.530	-	.550
Overall Length	D		1.645	-	1.655
Tip to Seating Plane	L		.120	-	.150
Lead Thickness	c		.008	-	.012
Upper Lead Width	b1		.045	-	.065
Lower Lead Width	b		.016	-	.022
Overall Row Spacing §	eB		-	-	.700

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M




BSC: Basic Dimension. The theoretically exact value is shown without tolerances.

Microchip Technology Drawing C04-00106 (P2X) Rev B Sheet 2 of 2

Packaging Diagrams and Parameters

32-Lead Plastic Dual In-Line (PAX) - 600 mil Body [PDIP]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

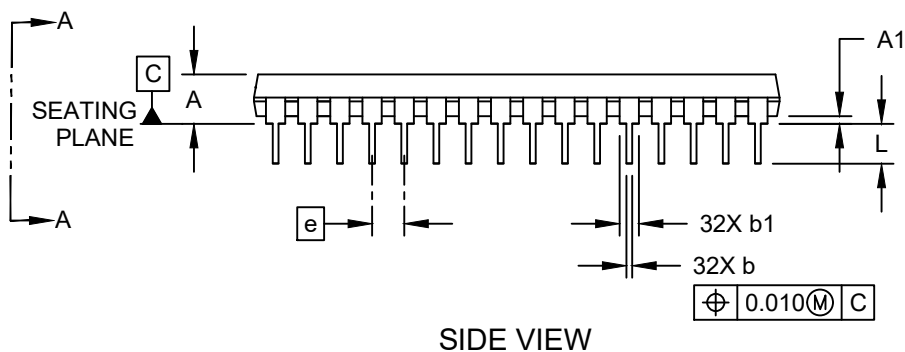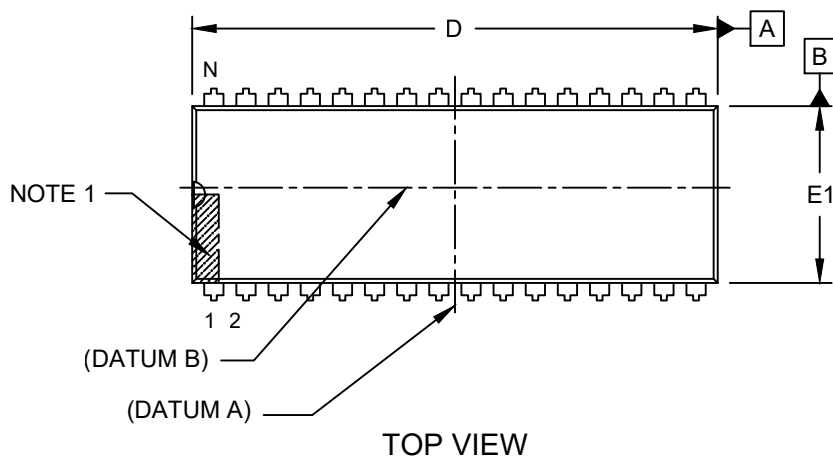

Packaging Diagrams and Parameters

32-Lead Plastic Dual In-Line (PAX) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

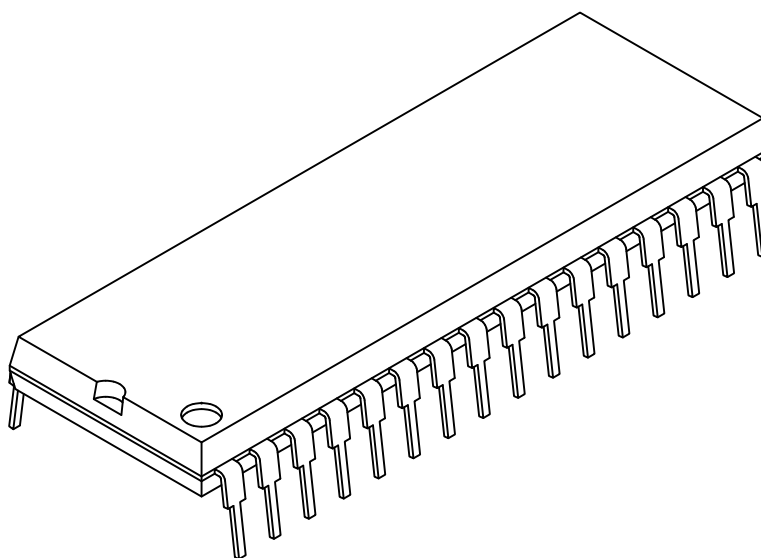

		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		32		
Pitch	e		.100 BSC		
Top to Seating Plane	A		.170	-	.200
Base to Seating Plane	A1		.015	-	.050
Shoulder to Shoulder Width	E		.600	-	.625
Molded Package Width	E1		.530	-	.550
Overall Length	D		1.645	-	1.655
Tip to Seating Plane	L		.120	-	.150
Lead Thickness	c		.008	-	.012
Upper Lead Width	b1		.045	-	.065
Lower Lead Width	b		.016	-	.022
Overall Row Spacing §	eB		-	-	.700

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M




BSC: Basic Dimension. The theoretically exact value is shown without tolerances.

Microchip Technology Drawing C04-00106 (PAX) Rev B Sheet 2 of 2

Packaging Diagrams and Parameters

32-Lead Plastic Dual In-Line (PXX) - 600 mil Body [PDIP]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

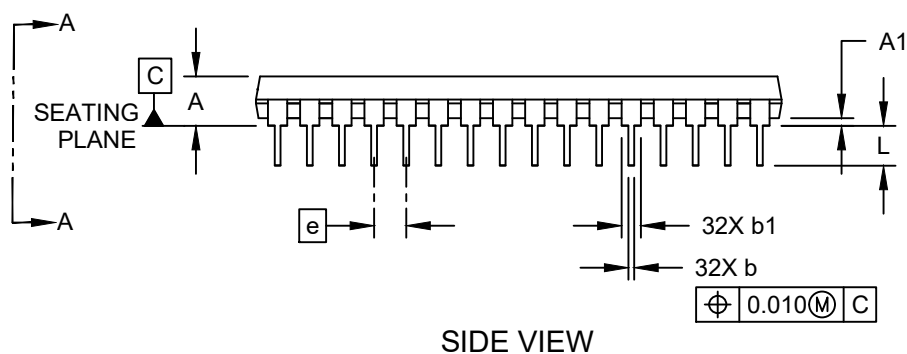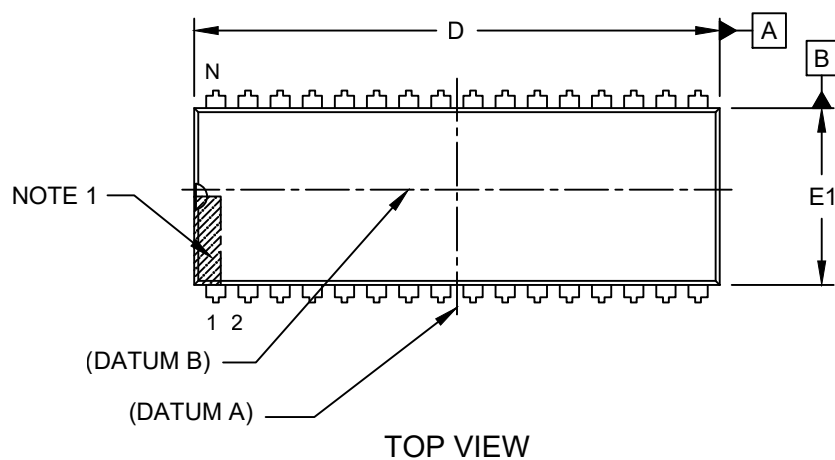

Packaging Diagrams and Parameters

32-Lead Plastic Dual In-Line (PXX) - 600 mil Body [PDIP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

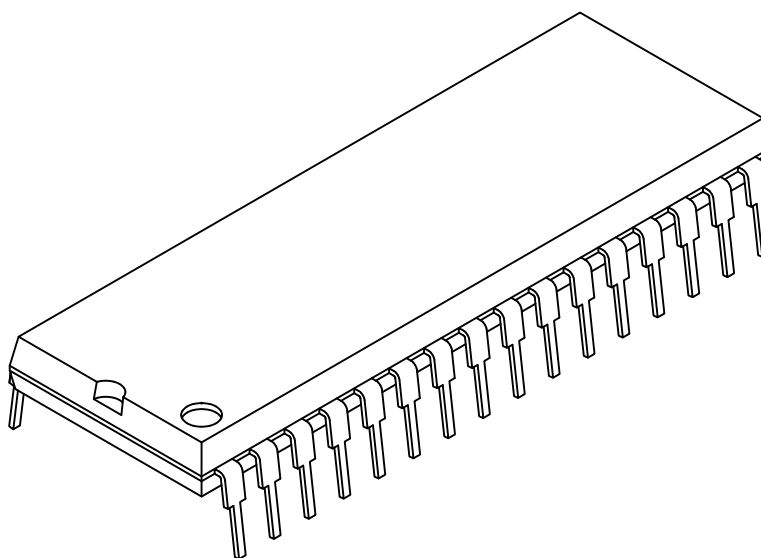

		Units	INCHES		
Dimension Limits			MIN	NOM	MAX
Number of Pins	N		32		
Pitch	e		.100 BSC		
Top to Seating Plane	A		.170	-	.200
Base to Seating Plane	A1		.015	-	.050
Shoulder to Shoulder Width	E		.600	-	.625
Molded Package Width	E1		.530	-	.550
Overall Length	D		1.645	-	1.655
Tip to Seating Plane	L		.120	-	.150
Lead Thickness	c		.008	-	.012
Upper Lead Width	b1		.045	-	.065
Lower Lead Width	b		.016	-	.022
Overall Row Spacing §	eB		-	-	.700

Notes:

1. The Pin 1 visual index feature may vary, but it must be located within the hatched area.
2. § Significant Characteristic
3. Dimensions D and E do not include mold flash or protrusions. Mold flash or protrusions shall not exceed .005" per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. The theoretically exact value is shown without tolerances.

Microchip Technology Drawing C04-00106 (PXX) Rev B Sheet 2 of 2